

SEOUL NATIONAL UNIVERSITY
SCHOOL OF MECHANICAL AND AEROSPACE ENGINEERING

SYSTEM ANALYSIS


Spring 2014

HW#7


Assigned: April 23 (Wed)

Due: May 7 (Wed)


Electric Vehicle Model

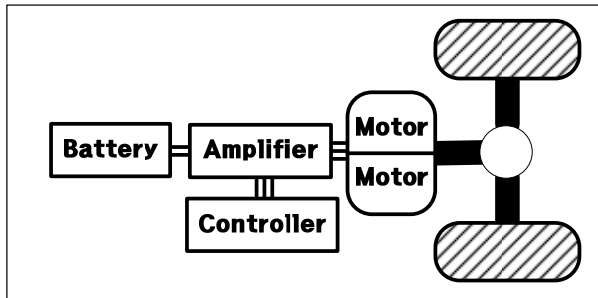

Electric Motor and wheel model

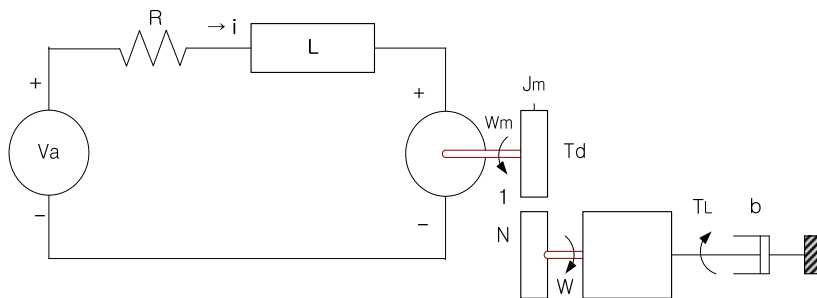

Wheel Dynamics

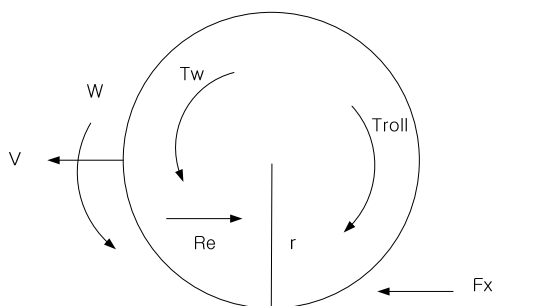

wheel

$$J_w \frac{d\omega}{dt} = T_w - F_x r - T_{roll}$$

$$m_w \frac{dv}{dt} = -m_w g \sin \theta + F_x - R_e$$

Vehicle body

$$M \frac{dv}{dt} = R_e - Mg \sin \theta - C_a v^2$$

Motor

$$V_a = Ri + L \frac{di}{dt} + K_b \omega_m$$

$$J_m \frac{d\omega_m}{dt} = K_T i - T_d$$

$$N = \frac{\omega_m}{\omega} = \frac{T_w}{T_d}$$

Parameters

Motor

$$L = 3 \times 10^{-3} H$$

$$J_m = 1 \text{ kgm}^2$$

$$N = 2$$

Vehicle

$$J_w = 1.35 \times 4 \text{ kgm}^2 \quad M = 2000 \text{ kg}$$

$$m_w = 50 \times 4 \text{ kg} \quad r = 0.3 \text{ m}$$

$$C_a = 0.35 \text{ N}/(\text{m}/\text{s})^2$$

$$T_{roll} = r \times 0.01 Mg$$

Assume that the number of driving motor is 2 and, $V_{\max} = 600 \text{ V}$, $R = 1 \Omega$ then Calculate K_T to satisfy following performance:

- (1) starting acceleration = 0.6g
- (2) maximum climbing gradient = 10deg (10km/h)
- (3) maximum speed = 150km/h