

# Optimum Design

Fall 2014

**Myung-II Roh**

Department of Naval Architecture and Ocean Engineering  
Seoul National University


## Contents

---

- ☑ Ch. 1 Introduction to Optimum Design
- ☑ Ch. 2 Unconstrained Optimization Method: Gradient Method
- ☑ Ch. 3 Unconstrained Optimization Method: Enumerative Method
- ☑ **Ch. 4 Constrained Optimization Method: Penalty Function Method**
- ☑ Ch. 5 Constrained Optimization Method: LP (Linear Programming)
- ☑ Ch. 6 Constrained Optimization Method: SQP (Sequential Quadratic Programming)
- ☑ Ch. 7 Metaheuristic Optimization Method: Genetic Algorithms
- ☑ Ch. 8 Case Study of Optimal Dimension Design
- ☑ Ch. 9 Case Study of Optimal Route Design
- ☑ Ch. 10 Case Study of Optimal Layout Design

# Ch. 4 Constrained Optimization Method: Penalty Function Method

## Classes of Search Techniques

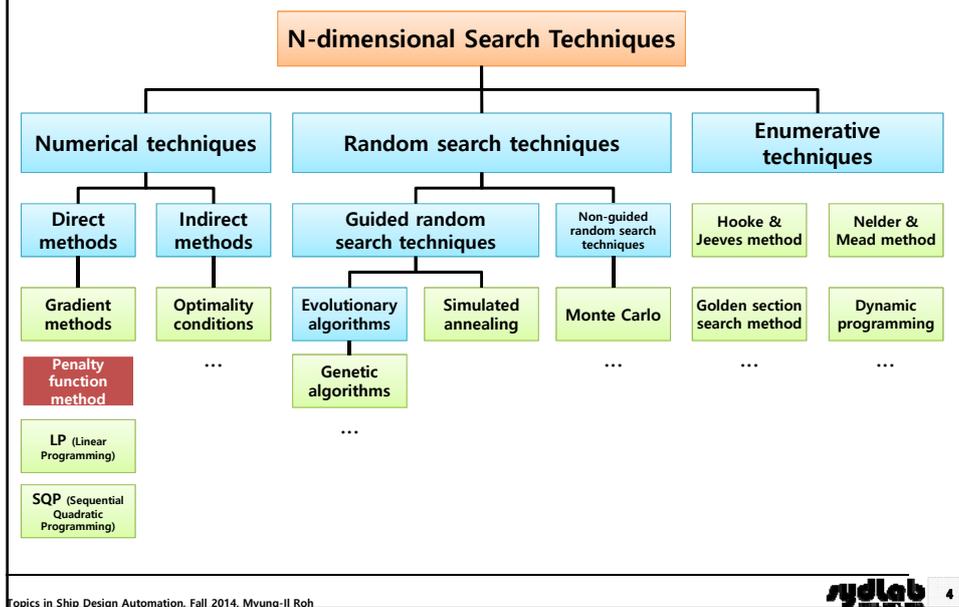

## 4.1 Interior Penalty Function Method

## Lagrange Multiplier

### Constrained Optimal Design Problem

Minimize  $f(\mathbf{x})$

Subject to  $\mathbf{h}(\mathbf{x}) = \mathbf{0}$  Equality constraint

$\mathbf{g}(\mathbf{x}) \leq \mathbf{0}$  Inequality constraint

### Transforming this problem to unconstrained optimal design problem by using the Lagrangian function

$$L(\mathbf{x}, \mathbf{v}, \mathbf{u}, \mathbf{s}) = f(\mathbf{x}) + \mathbf{v}^T \mathbf{h}(\mathbf{x}) + \mathbf{u}^T (\mathbf{g}(\mathbf{x}) + \mathbf{s}^2)$$

By using the necessary condition for the candidate local optimal solution ( $\nabla L = 0$ ), are calculated.

#### 1) If the constraints are satisfied at the current design point,

In case of the equality constraints:  $\mathbf{h}(\mathbf{x}) = \mathbf{0}$

In case of the inequality constraints:  $\mathbf{u} = \mathbf{0}$  (The constraints are inactive, i.e, the design point is in feasible region.)

$\mathbf{s} = \mathbf{0} \Rightarrow \mathbf{g}(\mathbf{x}) = \mathbf{0}$  (The constraints are active, i.e, the design point is on the constraints)

Therefore,  $L(\mathbf{x}, \mathbf{v}, \mathbf{u}, \mathbf{s}) = f(\mathbf{x}) + \mathbf{v}^T \mathbf{h}(\mathbf{x}) + \mathbf{u}^T (\mathbf{g}(\mathbf{x}) + \mathbf{s}^2) \Rightarrow f(\mathbf{x})$  ▶ If all the constrains are satisfied, the Lagrange function is same with the original objective function.

#### 2) If the constraints are violated at the current design point,

In case of the equality constraints:  $\mathbf{v}^T \mathbf{h}(\mathbf{x}) \neq \mathbf{0}$

In case of the inequality constraints:  $\mathbf{u}^T (\mathbf{g}(\mathbf{x}) + \mathbf{s}^2) > \mathbf{0}$

Therefore,  $L(\mathbf{x}, \mathbf{v}, \mathbf{u}, \mathbf{s}) = f(\mathbf{x}) + \mathbf{v}^T \mathbf{h}(\mathbf{x}) + \mathbf{u}^T (\mathbf{g}(\mathbf{x}) + \mathbf{s}^2)$

▶ This term means augmenting a penalty to the original objective function when the constraints are violated.

## SUMT: Sequential Unconstrained Minimization Technique (Interior Penalty Function Method) (1/2)

### Constrained Optimal Design Problem

Minimize  $f(x)$   
 Subject to  $h(x) = 0$  Equality constraint  
 $g(x) \leq 0$  Inequality constraint

Fiacco and McCormick suggested a method which transforms the constrained optimization problem into the unconstrained optimization problem by using the modified objective function in 1968. The modified objective function is a function augmenting a penalty to the original objective function.

### SUMT: Sequential Unconstrained Minimization Technique

$$\Phi(x, r_k) = f(x) - r_k \sum_{j=1}^m \frac{1}{g_j(x)}$$


where  $r_k$  is given and positive value and getting smaller each iteration.

If the design point approaches to the boundary of the inequality constraints in the feasible region,

$g_j(x) \leq 0$ , the absolute value of this is decreased.

$-r_k \frac{1}{g_j(x)} > 0$ , the absolute value of this is increased.

Since the modified objective function is increased as the design point approaches to the boundary of the inequality constraint, this method prevents the design point violating the constraints.

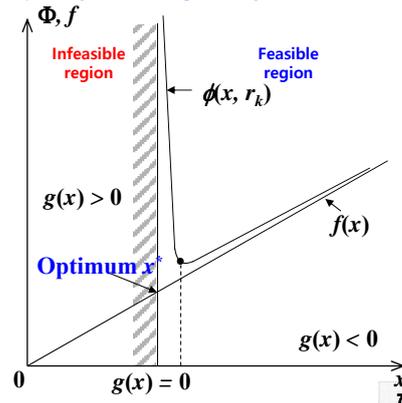

## SUMT: Sequential Unconstrained Minimization Technique (Interior Penalty Function Method) (2/2)

☑ If the design point approaches to the boundary of the constraints in the feasible region, the objective function is augmented by a penalty.

☑ The starting design point has to be in the feasible region.

$$\Phi(x, r_k) = f(x) - r_k \sum_{j=1}^m \frac{1}{g_j(x)} \quad (r_k \text{ is decreased, when } k \text{ is increased.})$$

### [Example] Function of a single variable

$$f(x) = \alpha x, \quad g(x) = \beta - x \leq 0, \quad (x \geq \beta \Rightarrow \beta - x \leq 0)$$

Transform the constrained optimization problem into the unconstrained optimization problem.

$$\Phi(x, r_k) = f(x) - r_k \frac{1}{g(x)} = \alpha x - r_k \frac{1}{\beta - x}$$

-  $k$  is the number of iteration.

- In each iteration, the optimal design point can be obtained by using the Gradient method, Hooke & Jeeves or Nelder & Mead method.

$k = 1$ , Starting design point:  $x_0$

$$\Phi(x, r_1) = \alpha x - r_1 \frac{1}{\beta - x} \quad \rightarrow \quad \text{Optimal design point: } x^*_1$$


$k = 2$ , Starting design point:  $x^*_1$

$$\Phi(x, r_2) = \alpha x - r_2 \frac{1}{\beta - x} \quad \rightarrow \quad \text{Optimal design point: } x^*_2$$

$k = 3$ , Starting design point:  $x^*_2$

$$\Phi(x, r_3) = \alpha x - r_3 \frac{1}{\beta - x} \quad \rightarrow \quad \text{Optimal design point: } x^*_3$$

By iterating the above process, we find the optimal design point ( $x^*$ ).

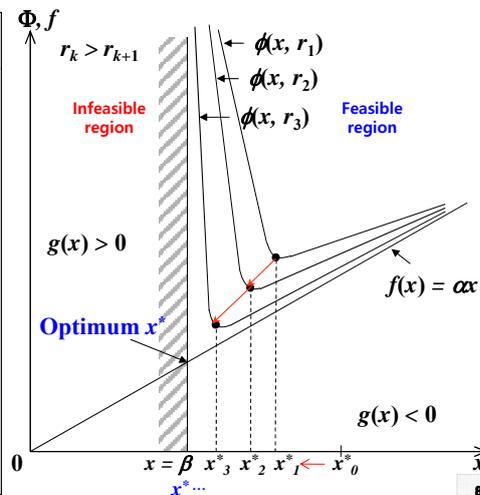

## 4.2 Exterior Penalty Function Method

### Exterior Penalty Function Method (1/2)

☑ There will be a **penalty for only violating the constraints.**

$$\Phi(x, r_k) = f(x) + r_k \sum_{j=1}^m [\max\{g_j(x), 0\}]^2 \quad (r_k \text{ is increased, when } k \text{ is increased.})$$

[Example] Function of a single variable

$$f(x) = \alpha x, \quad g(x) = \beta - x \leq 0, (x \geq \beta \Rightarrow \beta - x \leq 0)$$

Transform the constrained optimization problem into the unconstrained optimization problem.

$$\Phi(x, r_k) = f(x) + r_k \max\{g(x), 0\}^2 = \alpha x + r_k \max\{g(x), 0\}^2$$

-  $k$  is the number of iteration.

- In each iteration, the optimal design point can be obtained by using the Gradient method, Hooke & Jeeves or Nelder & Mead method.

$k = 1$ , Starting design point:  $x^*_0$

$$\Phi(x, r_1) = \alpha x + r_1 [\max\{g(x), 0\}]^2 \quad \rightarrow \text{Optimal design point: } x^*_1$$


$k = 2$ , Starting design point:  $x^*_1$

$$\Phi(x, r_2) = \alpha x + r_2 [\max\{g(x), 0\}]^2 \quad \rightarrow \text{Optimal design point: } x^*_2$$

$k = 3$ , Starting design point:  $x^*_2$

$$\Phi(x, r_3) = \alpha x + r_3 [\max\{g(x), 0\}]^2 \quad \rightarrow \text{Optimal design point: } x^*_3$$

By iterating the above process, we find the **optimal design point** ( $x^*$ ).

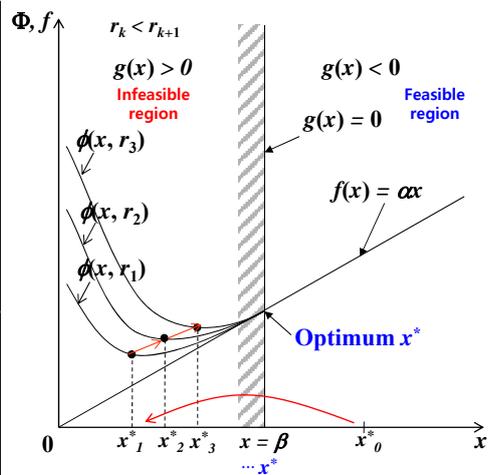

## Exterior Penalty Function Method (2/2)

☑ There will be a **penalty for only violating the constraints.**

$$\Phi(x, r_k) = f(x) + r_k \sum_{j=1}^m \max\{g_j(x), 0\} \quad (r_k \text{ is increased, when } k \text{ is increased.})$$

[Example] Function of a single variable  
 $f(x) = \alpha x, \quad g(x) = \beta - x \leq 0, (x \geq \beta \Rightarrow \beta - x \leq 0)$

Transform the constrained optimization problem into the unconstrained optimization problem.  
 $\Phi(x, r_k) = f(x) + r_k \max\{g(x), 0\} = \alpha x + r_k \max\{g(x), 0\}$

-  $k$  is the number of iteration.

- In each iteration, the optimal design point can be obtained by using the Gradient method, Hooke & Jeeves or Nelder & Mead method.

$k = 1$ , Starting design point:  $x^*_0$   
 $\Phi(x, r_1) = \alpha x + r_1 \max\{g(x), 0\}$  → Optimal design point: we can not find it.

$k = 2$ , Starting design point:  $x^*_1$   
 $\Phi(x, r_2) = \alpha x + r_2 \max\{g(x), 0\}$  → Optimal design point:  $x^*_2$

$k = 3$ , Starting design point:  $x^*_2$   
 $\Phi(x, r_3) = \alpha x + r_3 \max\{g(x), 0\}$  → Optimal design point:  $x^*_3$

If  $r_k$  is determined properly, the optimal design point ( $x^*$ ) is not changed.

11

## Relationship between External Penalty Function and Feasible Region (1/2)

☑ Since there will be a penalty for only violating the constraints, **if the minimum design point is in the feasible region**, the result of the optimization method by using the exterior penalty function is the same with that only using the objective function.

[Example] Function of a single variable  
 $f(x) = (x - \alpha)^2, \quad g(x) = \beta - x \leq 0$

$$\Phi(x, r_k) = f(x) + r_k \sum_{j=1}^m \left[ \max\{g_j(x), 0\} \right]^2$$

Penalty term

$$\Phi(x, r_k) = f(x)$$

where,  $g(x) \leq 0, \max\{g_j(x), 0\} = 0$

If the minimum design point ( $x^*$ ) is in the feasible region, the penalty term is equal to zero. So, the objective function augmented by the penalty is the same with the original objective function.

12

Topics in Shio Design Automation, Fall 2014, Myung-Il Roh



### Relationship between External Penalty Function and Feasible Region (2/2)

☑ Since there will be a penalty for only violating the constraints, **if the minimum design point is not in the feasible region (infeasible region)**, the result of the optimization method by using the exterior penalty function is different with that only using the objective function.

[Example] Function of a single variable

$$f(x) = (x - \alpha)^2, \quad g(x) = \beta - x \leq 0$$


$$\Phi(x, r_k) = f(x) + r_k \sum_{j=1}^m \left[ \max\{g_j(x), 0\} \right]^2$$

Penalty term

$$\Phi(x, r_k) = f(x) + r_k \sum_{j=1}^m g_j(x)^2$$

where,  $g(x) > 0, \max\{g_j(x), 0\} = g_j(x)$

If the minimum design point ( $x^*$ ) is not in the feasible region, the penalty term is larger than zero. So, the objective function augmented by the penalty is different with the original objective function.

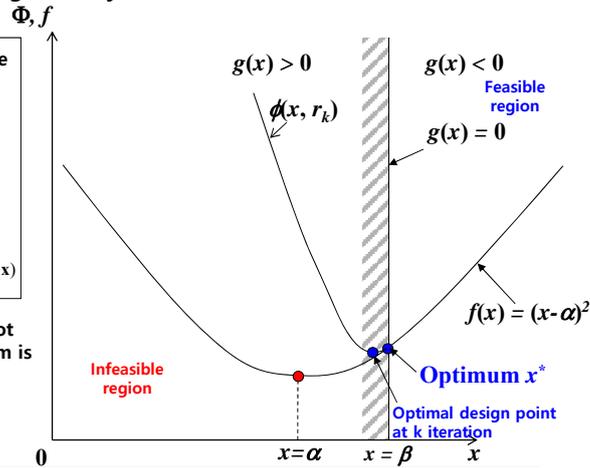

## 4.3 Augmented Lagrange Multiplier Method

## Augmented Lagrange Multiplier Method

- ☑ This method combines the Lagrange multiplier and the penalty function methods.
- ☑ There is **no need for the penalty parameter "r" to go to infinity for the exterior penalty function method or zero for the interior penalty function method.**
- ☑ **Starting point does not have to be in feasible region for the interior penalty function method.**
- ☑ It has been proven that they possess a **faster rate of convergence** than interior and exterior penalty function method.

## Augmented Lagrange Multiplier Method in Equality Constrained Problem (1/4)

$$\begin{array}{l} \text{Minimize } f(\mathbf{x}) \\ \text{Subject to } h_j(\mathbf{x}) = 0, \quad j = 1, 2, \dots, m \end{array}$$

Lagrangian function of this problem is as follows.

$$L(\mathbf{x}, \boldsymbol{\lambda}) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x})$$

**Augmented Lagrangian function** of this problem is follows.

$$\Phi(\mathbf{x}, \boldsymbol{\lambda}, r_k) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x}) + r_k \sum_{j=1}^m h_j^2(\mathbf{x})$$

Augmented term to  
Lagrangian function

$r_k$ : arbitrary constant

## Augmented Lagrange Multiplier Method in Equality Constrained Problem (2/4)

$$\begin{array}{l} \text{Minimize } f(\mathbf{x}) \\ \text{Subject to } h_j(\mathbf{x}) = \mathbf{0}, \quad j = 1, 2, \dots, m \end{array}$$

Lagrangian function

$$L(\mathbf{x}, \boldsymbol{\lambda}) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x})$$

Augmented Lagrangian function

$$\Phi(\mathbf{x}, \boldsymbol{\lambda}, r_k) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x}) + r_k \sum_{j=1}^m h_j^2(\mathbf{x})$$

Augmented term to Lagrangian function

$r_k$ : arbitrary constant

Necessary conditions for the minimum  
of Lagrangian function

$$\frac{\partial L}{\partial x_i} = \frac{\partial f}{\partial x_i} + \sum_{j=1}^m \lambda_j \frac{\partial h_j}{\partial x_i} = 0$$

Necessary conditions for the minimum  
of Augmented Lagrangian function

$$\frac{\partial \Phi}{\partial x_i} = \frac{\partial f}{\partial x_i} + \sum_{j=1}^m (\lambda_j + 2r_k h_j) \frac{\partial h_j}{\partial x_i} = 0$$

Find iterative relation

$$\lambda_j^* = \lambda_j + 2r_k h_j \quad j = 1, 2, \dots, m$$

$$\lambda_j^{(k+1)} = \lambda_j^{(k)} + 2r_k h_j(\mathbf{x}^{(k)}) \quad j = 1, 2, \dots, m$$

## Augmented Lagrange Multiplier Method in Equality Constrained Problem (3/4)

$$\begin{array}{l} \text{Minimize } f(\mathbf{x}) \\ \text{Subject to } h_j(\mathbf{x}) = \mathbf{0}, \quad j = 1, 2, \dots, m \end{array}$$

Augmented Lagrangian function

$$\Phi(\mathbf{x}, \boldsymbol{\lambda}, r_k) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x}) + r_k \sum_{j=1}^m h_j^2(\mathbf{x})$$

Augmented term to Lagrangian function

$r_k$ : arbitrary constant

Iterative relation

$$\lambda_j^{(k+1)} = \lambda_j^{(k)} + 2r_k h_j(\mathbf{x}^{(k)}) \quad j = 1, 2, \dots, m$$

1. In the first iteration ( $k=1$ ), the values of  $\lambda_j^{(1)}$  are chosen as zero, the value of  $r_k$  is set equal to an arbitrary constant.

2. Find the  $\mathbf{x}^{*(k)}$  that minimize  $\Phi$  by using any unconstrained optimization method and set  $\mathbf{x}^{(k+1)} = \mathbf{x}^{*(k)}$ .

## Augmented Lagrange Multiplier Method in Equality Constrained Problem (4/4)

Minimize  $f(\mathbf{x})$   
 Subject to  $h_j(\mathbf{x}) = 0, \quad j = 1, 2, \dots, m$

Augmented Lagrangian function

$$\Phi(\mathbf{x}, \lambda, r_k) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x}) + r_k \sum_{j=1}^m h_j^2(\mathbf{x})$$

Augmented term to Lagrangian function

$r_k$  : arbitrary constant

Iterative relation

$$\lambda_j^{(k+1)} = \lambda_j^{(k)} + 2r_k h_j(\mathbf{x}^{(k)}) \quad j = 1, 2, \dots, m$$


3. The values of  $\lambda_j^{(k)}$  and  $r_k$  are then updated by using the iterative relation to start the next iteration.

$$r_{k+1} = cr_k, \quad c > 1$$

$$\lambda_j^{(k+1)} = \lambda_j^{(k)} + 2r_k h_j(\mathbf{x}^{*(k)}) \quad j = 1, 2, \dots, m$$

4. If  $|\lambda_j^{(k+1)} - \lambda_j^{(k)}| < \varepsilon$ , stop the iteration and take  $\mathbf{x}^* = \mathbf{x}^{*(k)}$ .

## Algorithm of Augmented Lagrange Multiplier Method

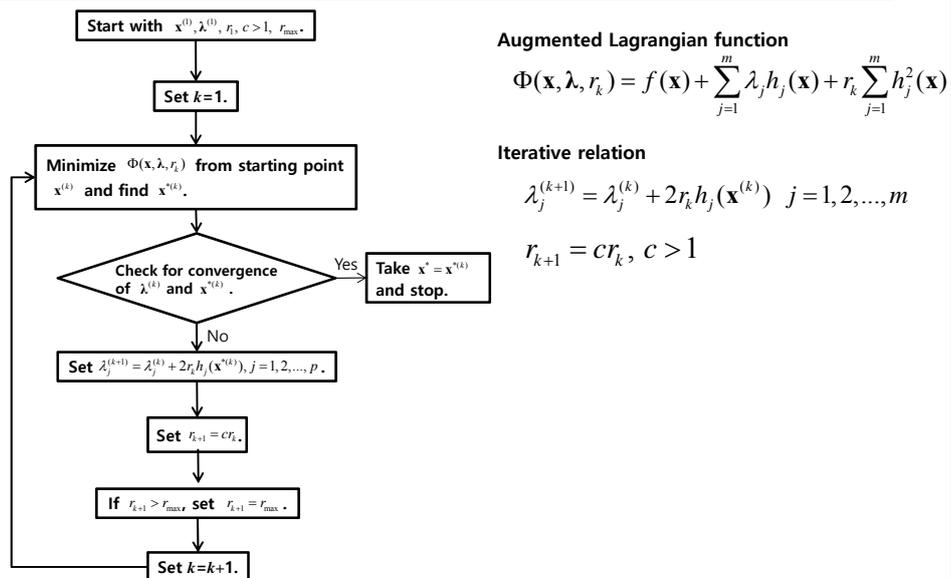

Augmented Lagrangian function

$$\Phi(\mathbf{x}, \lambda, r_k) = f(\mathbf{x}) + \sum_{j=1}^m \lambda_j h_j(\mathbf{x}) + r_k \sum_{j=1}^m h_j^2(\mathbf{x})$$

Iterative relation

$$\lambda_j^{(k+1)} = \lambda_j^{(k)} + 2r_k h_j(\mathbf{x}^{(k)}) \quad j = 1, 2, \dots, m$$

$$r_{k+1} = cr_k, \quad c > 1$$

## Augmented Lagrange Multiplier Method in Inequality Constrained Problem

$$\begin{aligned} & \text{Minimize } f(\mathbf{x}) \\ & \text{Subject to } g_j(\mathbf{x}) \leq 0, \quad j=1,2,\dots,m \end{aligned}$$

Augmented Lagrangian function in the inequality constrained problem

$$\Phi(\mathbf{x}, \mathbf{u}, \mathbf{s}, r_k) = f(\mathbf{x}) + \sum_{j=1}^m u_j [g_j(\mathbf{x}) + s_j] + r_k \sum_{j=1}^m [g_j(\mathbf{x}) + s_j]^2$$

Augmented term to  
Lagrangian function

$r_k$  : arbitrary constant

$s_j$  : slack variable

This function is equivalent to\*

$$\Phi(\mathbf{x}, \mathbf{u}, r_k) = f(\mathbf{x}) + \sum_{j=1}^m u_j \alpha_j + r_k \sum_{j=1}^m \alpha_j^2, \quad \alpha_j = \max \left\{ g_j(\mathbf{x}), -\frac{u_j}{2r_k} \right\}$$

Iterative relation

$$u_j^{(k+1)} = u_j^{(k)} + 2r_k \alpha_j^{(k)}$$

\* Rockafellar, R.T., "The Multiplier Method of Hestenes and Powell Applied to Convex Programming", Journal of Optimization Theory and Applications, 1973  
Topics in Ship Design Automation, Fall 2014, Myung-II Roh

## 4.4 Descent Function Method

## Descent Function Method

**Constrained Optimal Design Problem**

Minimize  $f(\mathbf{x})$

Subject to  $\mathbf{h}(\mathbf{x}) = \mathbf{0}$  Equality constraint

$\mathbf{g}(\mathbf{x}) \leq \mathbf{0}$  Inequality constraint

**Pshenichny and Danilin** suggested a method which transforms the constrained optimization problem into the unconstrained optimization by using the descent function\* in 1978.

$$V(\mathbf{x}) = \max\{0; \mathbf{h}; \mathbf{g}\} : \text{Maximum penalty by the constraints}$$

$$\Phi(\mathbf{x}) = f(\mathbf{x}) + R \cdot V(\mathbf{x}) \quad R = \max\left\{R_0, r\left(= \sum_{i=1}^p |v_i| + \sum_{i=1}^m u_i\right)\right\}$$

The positive value defined by user ←

: Penalty parameters which is the summation of the all Lagrange multipliers (Positive value)

1) If all constraints are satisfied at the current design point,  
 $V(\mathbf{x}) = 0 \Rightarrow R \cdot V(\mathbf{x}) = 0$   
 $\Rightarrow \Phi(\mathbf{x}) = f(\mathbf{x}) + R \cdot V(\mathbf{x}) \Rightarrow f(\mathbf{x})$  → If all constraints are satisfied at the current design point, the descent function is the same with the original objective function.

2) If one of more constraints are violated at the current design point,  
 $R \cdot V(\mathbf{x}) > 0$   
 $\Rightarrow \Phi(\mathbf{x}) = f(\mathbf{x}) + R \cdot V(\mathbf{x}) > f(\mathbf{x})$  → If one of more constraints are violated at the current design point, the value of the positive penalty is augmented to the original objective function.

**\* Descent Function**

- Modified objective function by augmenting a penalty to the original objective function
- It has the same meaning with penalty function.

23

## Reference Slides

 24

Topics in Ship Design Automation, Fall 2014, Myung-Il Roh