

# **5. Helicopter Aeroelasticity**

# Helicopter Aeroelasticity

- Single D.O.F. flutter

[ blade motion (flap, lag, torsion) coupling


[ hub

divergence, flutter (freq. coalescence)



(e.a., c.g., whirl flutter)

- isolated blade instability (hover) ← collective pitch
- stall instability (forward flight) ← cyclic pitch [ longitudinal  
lateral
- aeromechanical instability (rotor, fuselage)
- active control

# Helicopter Aeroelasticity

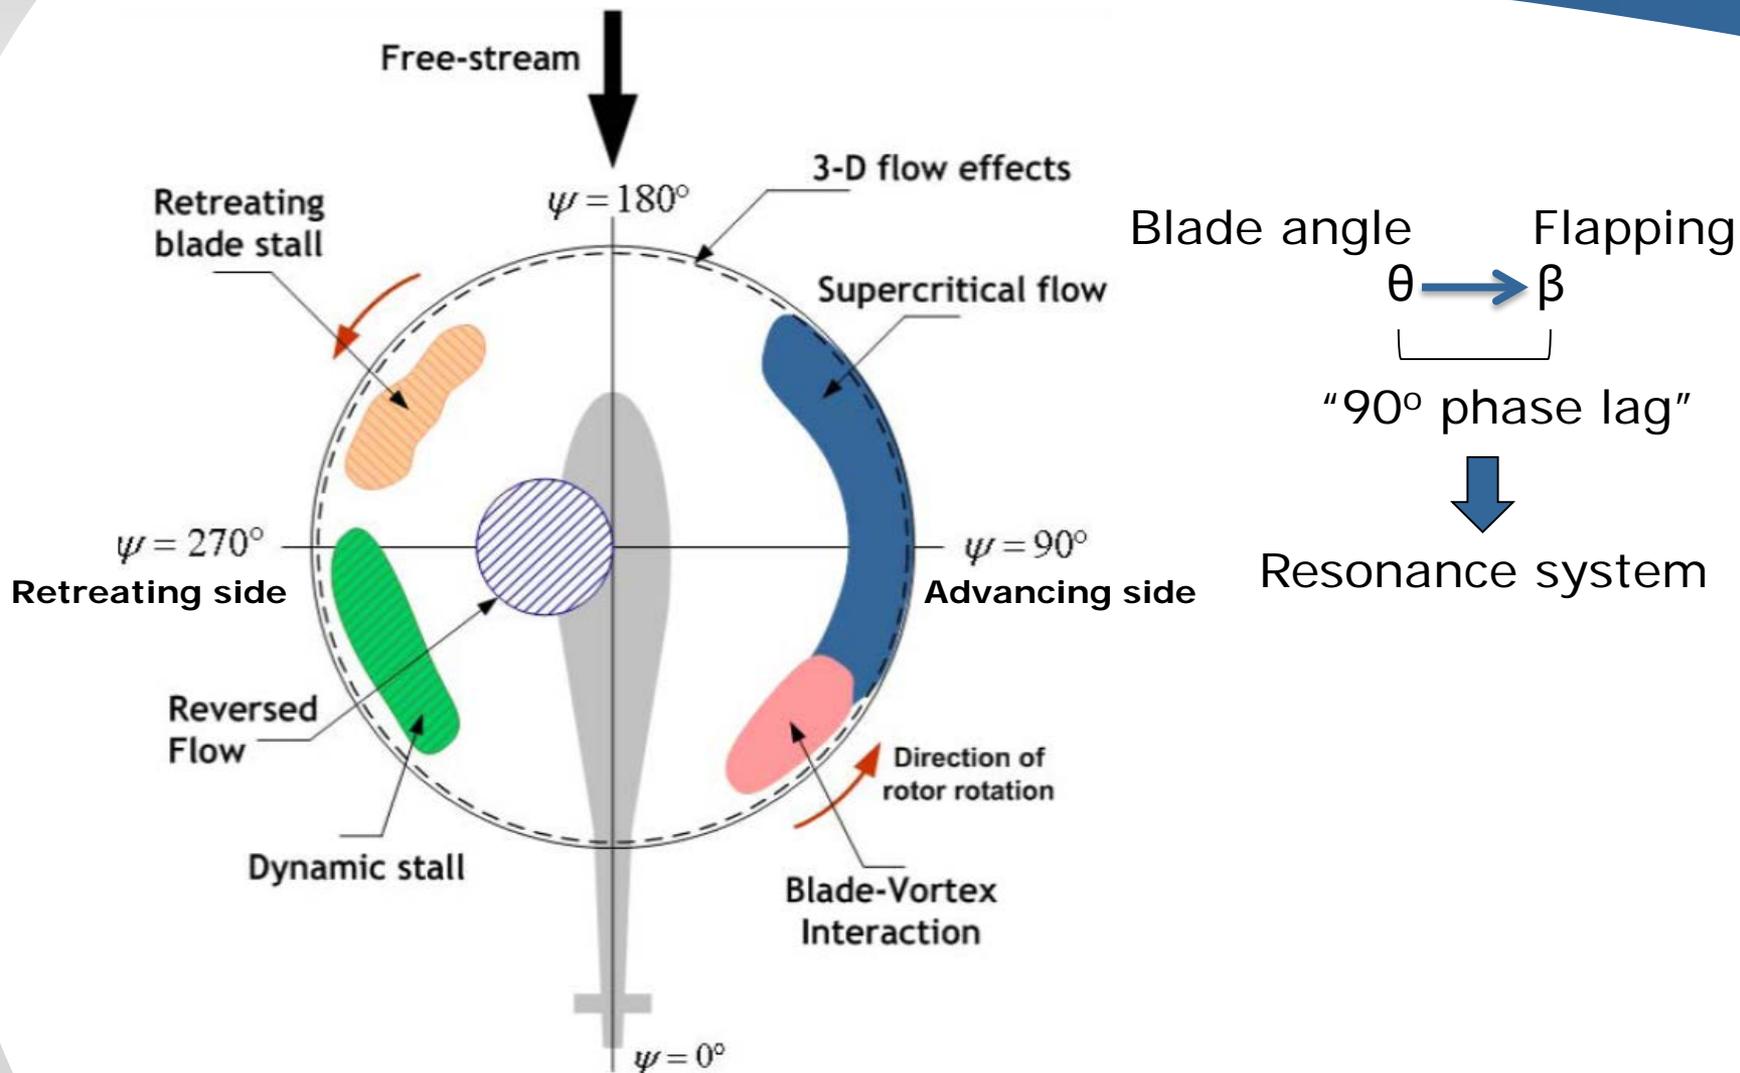

# Helicopter Aeroelasticity

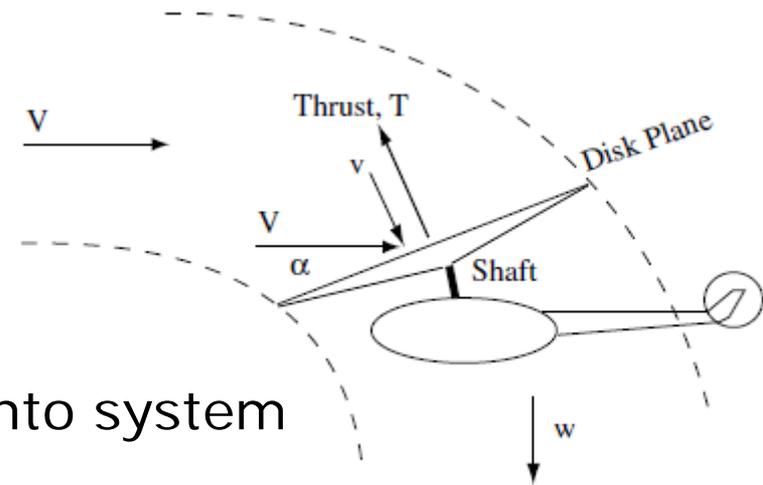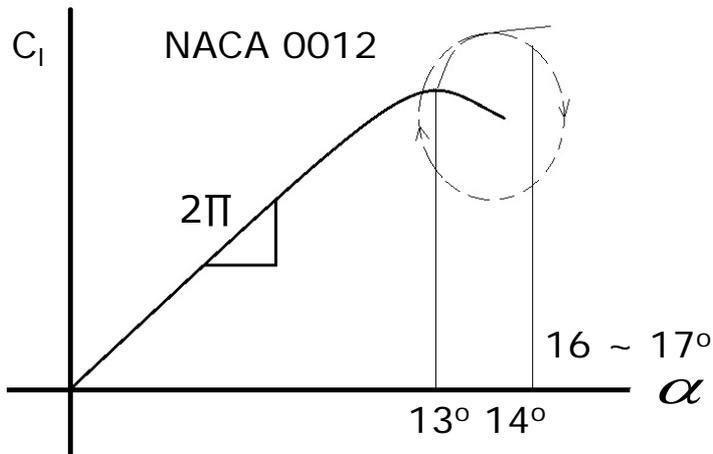


"hysteresis"  $\longrightarrow$  feed energy into system

- limit cyclic not destructive
- vibration load  $\uparrow$

## Rotor Type

- a) Semi-articulated or teetering (2-bladed, bell)
- b) Fully-articulated { flapping, pitch, lag  
elastomeric bearing
- c) Hingeless  $\longrightarrow$  feathering hinge only
- d) Bearingless

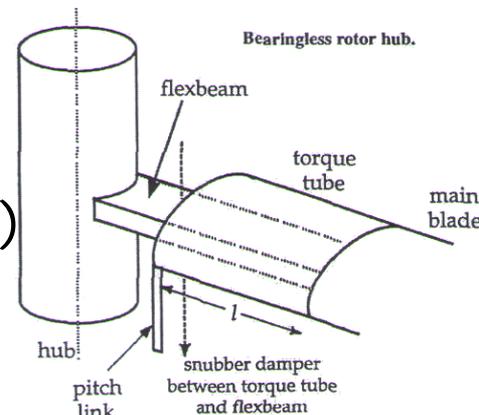


# Helicopter Aeroelasticity

- *Isolated Blade Dynamics*

- Articulated Rigid Blade Motion

First let's consider a single blade with only flapping motion

(hinge located at the axis of rotation)

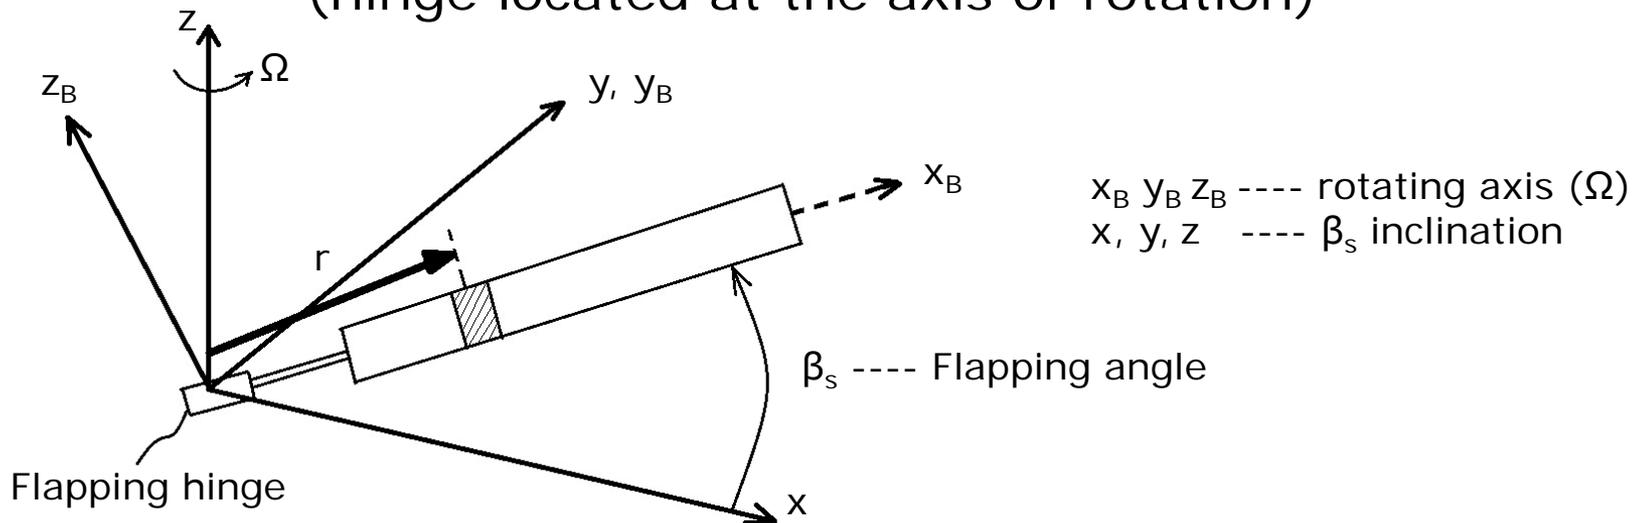

- *Rotor blade structural blade dynamics modeling*

- rigid blade + spring concentrated at hub

- elastic blade + geometric coupling

└───> box-beam

# Helicopter Aeroelasticity

- complete cross-section shape

Assumption { flapping, pitch, lag  
elastomeric bearing

From dynamics

$$\frac{d^I \vec{H}_P}{dt} = \vec{M}$$

$I$  : Inertia     $\vec{H}_P$  : Angular momentum

$$\dot{\vec{H}}_P + \vec{\Omega}_P \times \vec{H}_P = \int_0^R \vec{r} \times d\vec{F}_A$$

The blade is slender, assume

$$\begin{cases} I_B \approx I_{y_B} \approx I_{z_B} & \text{(rotational inertia)} \\ I_{x_B} = 0 \end{cases}$$

If  $\vec{\Omega}_B = p_B \hat{i}_B + q_B \hat{j}_B + r_B \hat{k}_B$

$\Rightarrow \vec{H}_P = \vec{I} \cdot \vec{\Omega}_B = (I_B q_B) \hat{j}_B + (I_B r_B) \hat{k}_B$

# Helicopter Aeroelasticity

From dynamics

$$\begin{aligned}
 \vec{I} &= \hat{i} I_{11} \hat{i} + \hat{i} I_{12} \hat{j} + \hat{i} I_{13} \hat{k} \\
 \text{(dyadic)} \quad &+ \hat{j} I_{21} \hat{i} + \underbrace{\hat{j} I_{22} \hat{j}}_{I_{y_B}} + \hat{j} I_{23} \hat{k} + \dots
 \end{aligned}$$

$$\Rightarrow I_B (\dot{q}_B - p_B r_B) \hat{j}_B + I_B (\dot{r}_B + p_B q_B) \hat{k}_B = \int_0^R \vec{r} \times d\vec{F}_A$$

To relate  $\vec{\Omega}_B$  with  $\Omega, \dot{\beta}_s$

$$\begin{Bmatrix} p_B \\ q_B \\ r_B \end{Bmatrix} = \begin{bmatrix} \cos \beta_s & 0 & \sin \beta_s \\ 0 & 1 & 0 \\ -\sin \beta_s & 0 & \cos \beta_s \end{bmatrix} \begin{Bmatrix} 0 \\ 0 \\ \Omega \end{Bmatrix} + \begin{Bmatrix} 0 \\ -\beta_s \\ 0 \end{Bmatrix} \rightarrow \text{opposite to } y_B$$


# Helicopter Aeroelasticity

$$p_B = \Omega \sin \beta_s; \quad q_B = -\dot{\beta}_s; \quad r_B = \Omega \cos \beta_s$$

and the equation of motion

$$I_B (-\dot{\beta}_s - \Omega^2 \cos \beta_s \sin \beta_s) \hat{i}_B + I_B (-2\Omega \sin \beta_s \dot{\beta}_s) \hat{j}_B = \int_0^R \vec{r} \times d\vec{F}_A$$

For aerodynamics "Hover"

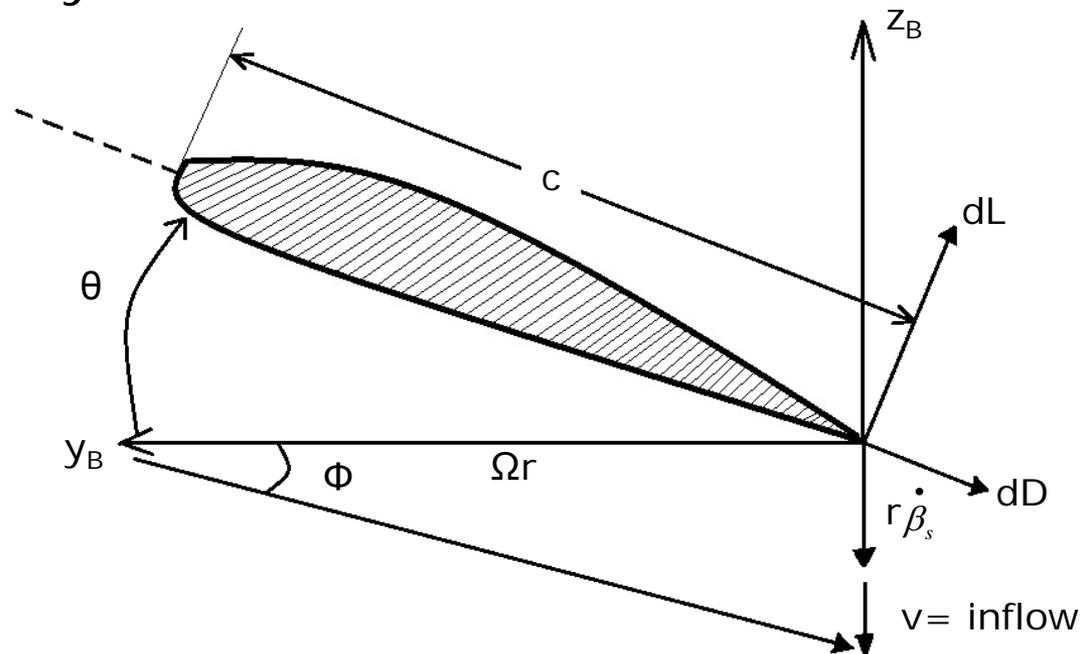

Strip theory  $\longrightarrow$  "blade element theory"

Inflow  $\longleftarrow$  Momentum theory

# Helicopter Aeroelasticity

$$d\vec{F}_A = dL\vec{k}_B + (-dD - \phi dL)\vec{j}_B \quad \phi \approx \text{small}$$

$$dL = \frac{1}{2} \rho (\Omega r)^2 (c \cdot dr) C_{L\alpha} (\theta - \phi)$$

$$dD = \frac{1}{2} \rho (\Omega r)^2 (c \cdot dr) C_{d0}$$

└──────────> Profile drag co-efficient

$$\phi = \frac{r \dot{\beta}_s + v}{\Omega r}$$

Introduce non-dimensional variables

$$x \in \frac{r}{R}$$


$$\lambda = -\frac{v}{\Omega R} \quad : \text{inflow parameter}$$

$$*\gamma = \frac{\rho C_{L\alpha} c R^4}{I_B} \quad : \text{Lock no. .... blade motion sensitivity}$$

# Helicopter Aeroelasticity

$$dL = \frac{I_B r \Omega^2}{R} \left( \theta - \frac{\dot{\beta}_s}{\Omega} + \frac{\lambda}{x} \right) x^2 dx$$

$$= \frac{I_B r \Omega^2}{R} \left( \frac{C_{d0}}{C_{L\alpha}} \right) x^2 dx$$

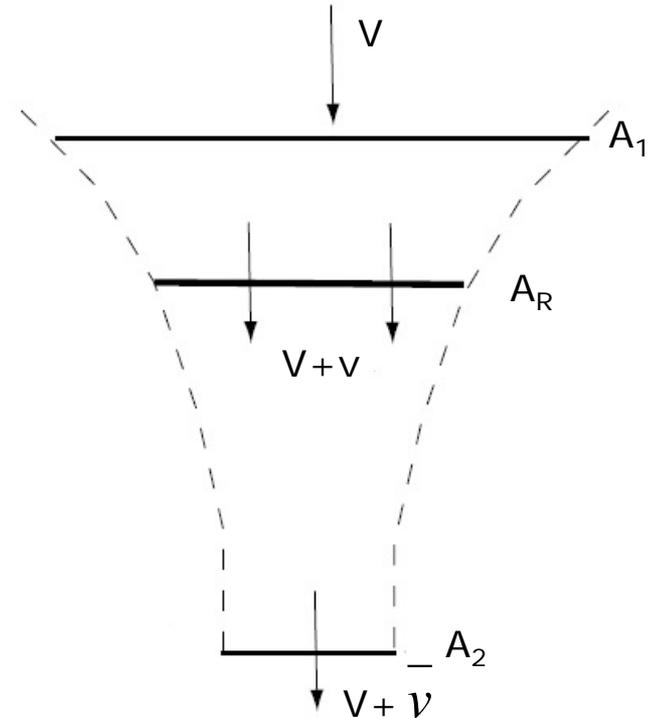

From total thrust 'T'

$$T = b \int_0^l dL \quad b - \text{No. of blades}$$

$$\frac{2C_T}{C_{L\alpha} \sigma} = \frac{\theta}{3} + \frac{\lambda}{2} \quad \text{where, } \sigma = \frac{bc}{\pi R} : \text{Solidity ratio}$$

$$C_T = \frac{T}{\rho \pi R^2 (\Omega R)^2} : \text{Thrust co-efficient}$$

$$\text{Momentum theory, } \lambda = -\sqrt{\frac{C_T}{2}}$$

# Helicopter Aeroelasticity

$$\int_0^R \vec{r} \times d\vec{F}_A = -\frac{\lambda\Omega}{8} \left( \theta + \frac{4\lambda}{3} - \frac{\dot{\beta}_s}{\Omega} \right) \hat{j}_B$$

$$+ \frac{I_B \gamma^2}{8} \left( -\frac{C_{d0}}{C_{L\alpha}} + \frac{\dot{\beta}_s}{\Omega} \left( \frac{\dot{\beta}_s}{\Omega} - \theta \right) + \frac{4}{3} \left( \theta - \frac{2\dot{\beta}_s}{\Omega} \right) \lambda + 2\lambda^2 \right) \hat{k}_B$$

Flapping eqn. of motion

$$\ddot{\beta}_s + \frac{\sigma\Omega}{8} \dot{\beta}_s + \Omega^2 \cos \beta_s \sin \beta_s = \frac{\gamma\Omega^2}{8} \left[ \theta + \frac{4}{3} \lambda \right]$$

and linearizing it


$$\ddot{\beta}_s + \frac{\gamma\Omega}{8} \dot{\beta}_s + \Omega^2 \beta_s = \frac{\gamma\Omega^2}{8} \left[ \theta + \frac{4}{3} \lambda \right] \quad \text{< Hover >}$$

$\underbrace{\frac{\gamma\Omega}{8}}_{\text{Damping ratio } \xi = \frac{\sigma}{16}}$ 
 $\underbrace{\Omega^2}_{\text{C.F. : Nat. freq. } \omega^2 = \Omega^2} \Rightarrow \text{Resonant System}$

# Helicopter Aeroelasticity

- Coupled Flap-Lag Equation  $\rightarrow$  "Lead-lag instability"

$$\begin{Bmatrix} p_B \\ q_B \\ r_B \end{Bmatrix} = \begin{bmatrix} \cos \xi_s & \sin \xi_s & 0 \\ -\sin \xi_s & \cos \xi_s & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{Bmatrix} 0 \\ 0 \\ \Omega \end{Bmatrix} + \begin{Bmatrix} 0 \\ 0 \\ \dot{\xi}_s \end{Bmatrix}$$

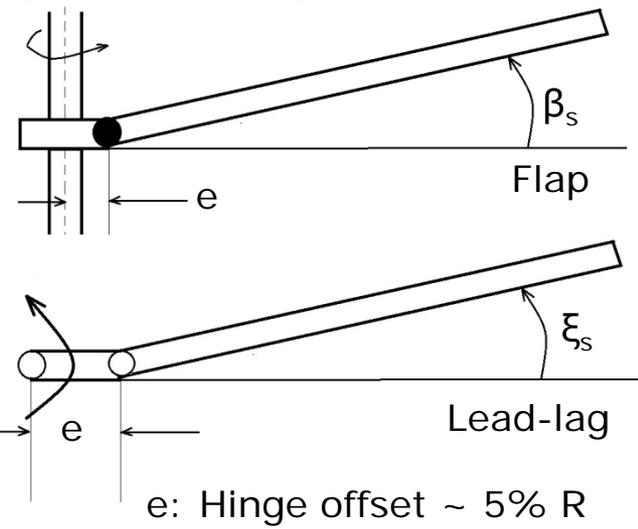

As before

$$\dot{\vec{H}}_P + \vec{\Omega}_B \times \vec{H}_P = \int_0^R \vec{r} \times d\vec{F}_A + \underbrace{\vec{E} \times M_B}_{\text{at hinge point}} \vec{a}_P$$

This accounts for the acceleration  
at hinge point

where,  $M_B$ : mass of the blade

$$\begin{aligned} \vec{a}_P &: \text{acceleration of hinge point} = \frac{d^{12} \vec{E}}{dt^2} \\ &= \underbrace{\dot{\vec{E}} \times \dot{\vec{\Omega}} \times \vec{E}}_0 + \vec{\Omega} \times \left( \underbrace{\dot{\vec{E}} \times \dot{\vec{\Omega}} \times \vec{E}}_0 \right) = \vec{\Omega} \times (\vec{\Omega} \times \vec{E}) + \dot{\vec{\Omega}} \times \vec{E} \end{aligned}$$

# Helicopter Aeroelasticity

- Neglect the hinge offset for aerodynamic calculation

Then,

$$dL = \frac{1}{2} \rho [(\Omega + \dot{\xi}_s) r]^2 c \cdot dr \cdot c_{l\alpha} \begin{bmatrix} \theta - \frac{r \dot{\beta}_s + v}{(\Omega + \dot{\xi}_s) r} \\ (\Omega + \dot{\xi}_s) r \end{bmatrix}$$

$$(1) \quad \vec{E}, \vec{a}_p = ?$$

$$\vec{v}_p = \frac{d^I \vec{E}}{dt} = \underset{0}{\dot{\vec{E}}} + \vec{\Omega} \times \vec{E} = \vec{\Omega} \times \vec{E}$$

$$\vec{a}_p = \frac{d^I \vec{v}_p}{dt} = \underset{0}{\dot{\vec{v}}_p} + \vec{\Omega} \times \vec{v}_p$$

$$= \underset{0}{\dot{\vec{\Omega}}} \times \vec{E} + \vec{\Omega} \times \underset{0}{\dot{\vec{E}}} + \vec{\Omega} \times (\vec{\Omega} \times \vec{E})$$

# Helicopter Aeroelasticity

The eqn. of motion for 2-DOF system

$$\ddot{\beta}_s + \Omega^2 \left( 1 + \frac{3}{2} \bar{e} \right) \beta_s + 2 \beta_s \underbrace{\dot{\xi}_s \Omega}_{\text{Coriolis' coupling}}$$

$$= \frac{\gamma \Omega^2}{8} \left[ \theta + \frac{4}{3} \lambda - \frac{\dot{\beta}_s}{\Omega} + \left( 2\theta + \frac{4}{3} \lambda \right) \frac{\dot{\xi}_s}{\Omega} \right] \quad \text{where, } \bar{e} = \frac{e}{R}$$

$$\ddot{\xi}_s + \frac{3}{2} \bar{e} \Omega^2 \xi_s - 2 \beta_s \dot{\beta}_s \Omega$$

$$= \frac{\gamma \Omega^2}{8} \left[ -\left( \theta + \frac{8}{3} \lambda \right) \frac{\dot{\beta}_s}{\Omega} - \left( 2 \frac{C_{d0}}{C_{l\alpha}} - \frac{4}{3} \lambda \theta \right) \frac{\dot{\xi}_s}{\Omega} - \frac{C_{d0}}{C_{l\alpha}} + \frac{4}{3} \lambda \theta + 2 \lambda^2 \right]$$

# Helicopter Aeroelasticity

Linearize about equilibrium (small perturbation)

$$\beta_s = \beta_0 + \beta \quad (\beta_0 = \text{coning angle})$$

$$\xi_s = \xi_0 + \xi$$

$$\beta_0 = \frac{\gamma}{8 \left( 1 + \frac{3}{2} e \right)} \left[ \theta + \frac{4}{3} \lambda \right]$$

$$\xi_0 = \frac{\gamma}{12e} \left[ -\frac{C_{d0}}{C_{l_\alpha}} + \frac{4}{3} \lambda \theta + 2\lambda^2 \right] = \frac{1}{3} \frac{\gamma}{e} \left( \frac{2C_Q}{C_{l_\alpha} \sigma} \right)$$

$C_Q$  : rotor torque co-efficient

# Helicopter Aeroelasticity


The perturbed equations are

$$\ddot{\beta}_s + \frac{\gamma \dot{\beta}}{8} + \left(1 + \frac{3^-}{2} e\right) \beta + \left[2\beta_0 - \frac{\gamma}{8} \left(2\theta + \frac{4}{3} \lambda\right) \dot{\xi}\right] = 0$$


$$\ddot{\xi} + \frac{\gamma}{8} \left(2 \frac{C_{d0}}{C_{l\alpha}} - \frac{4}{3} \lambda \theta\right) \dot{\xi} + \frac{3^-}{2} e \xi + \left[-2 \dot{\beta}_0 + \left(\theta + \frac{8}{3} \lambda\right)\right] \dot{\beta} = 0$$

$$\frac{\omega_\beta^2}{\Omega^2} = 1 + \frac{3^-}{2} e, \quad \frac{\omega_\xi^2}{\Omega^2} = \frac{3^-}{2} e, \quad e = \frac{e}{R}$$

# Helicopter Aeroelasticity

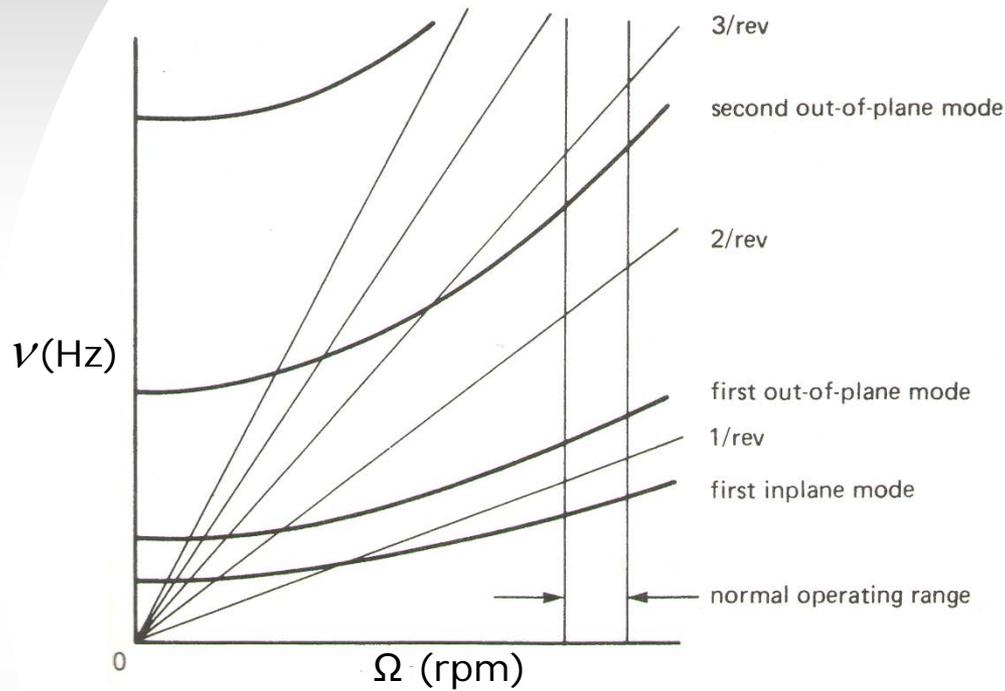

Fan Diagram

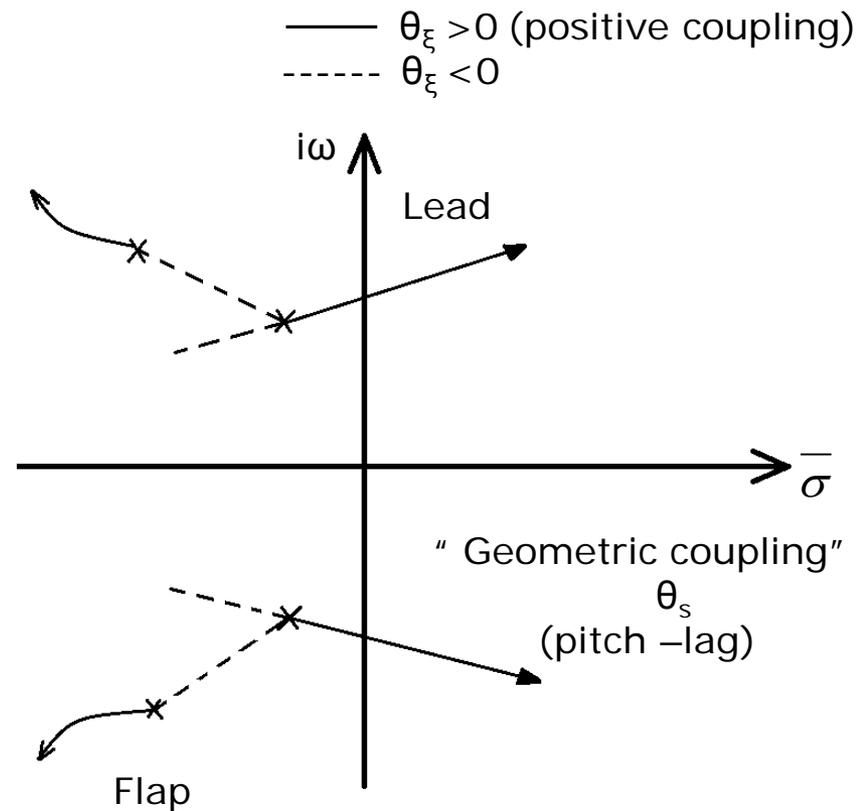


# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** ([Dowell Sec. 7.2](#))
  - Single DOF instability in rotorcraft ..... “ Stall flutter”
  - primarily associated with high speed flight, maneuvering
  - does not constitute a destructive instability, but rather produces a limit cycle behavior
  - Rotor disc in forward flight ..... AOA on the advancing side is considerably smaller than those on the retreating side (Typical AOA distribution at  $\mu = 0.33$  .... [Fig 7.13](#))
  - Retreating side ..... large AOA and changes rapidly with azimuth angle airload prediction needs to include unsteady effects

# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** (Dowell Sec. 7.2)
  - Since the stalled region is only encountered over a portion of the rotor disk, it will not be continuing unstable motion
  - complexity of the flow field around a stalled airfoil
    - experimental data

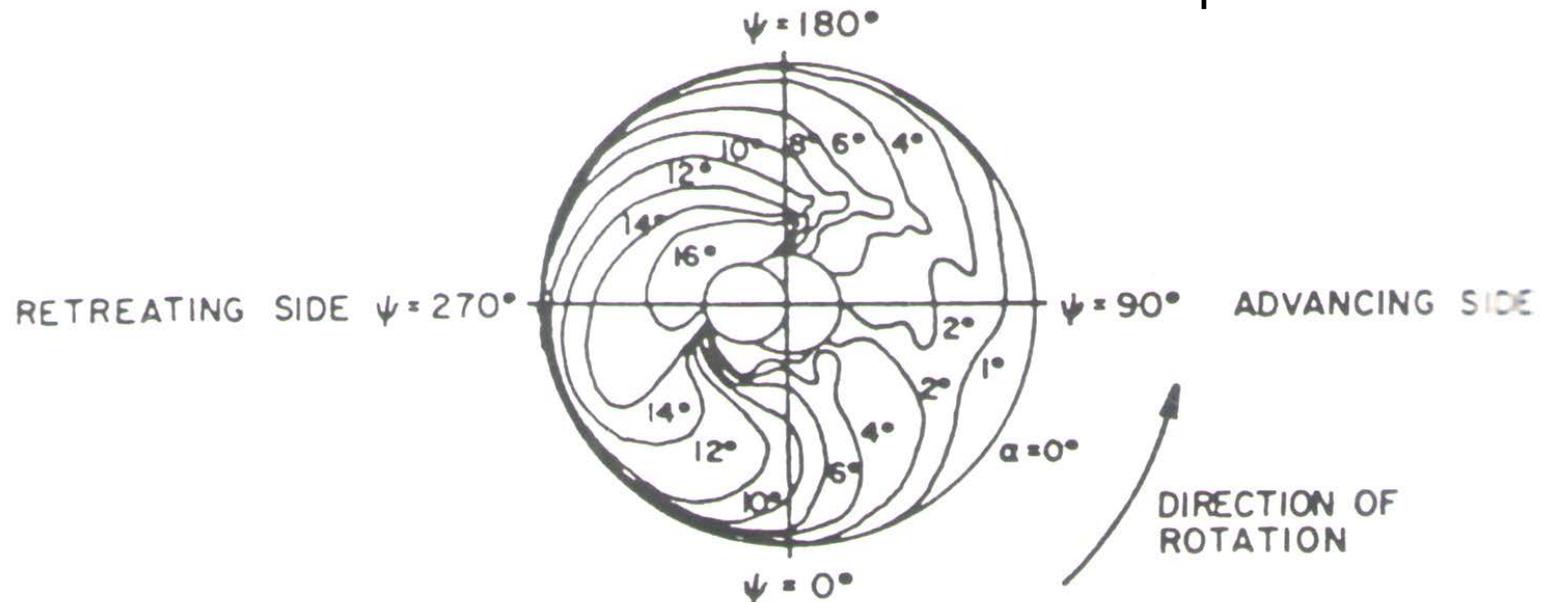

*A.O.A distribution of helicopter rotor at 140 knots ( $\mu = 0.33$ )*

# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** (Dowell Sec. 7.2)

- Single DOF blade motion assumed

$$\ddot{\alpha} + \omega_{\theta}^2 \alpha = \left( \frac{\rho (\Omega R)^2 c^2}{2 I_{\theta}} \right) C_M (\dot{\alpha})$$

→ Energy eqn. multiply by  $d\alpha$  and integrating over one cycle



$$\Delta \left\{ \frac{\dot{\alpha}^2}{2} + \omega_{\theta}^2 \frac{\alpha^2}{2} \right\} = \left( \frac{\rho (\Omega R)^2 c^2}{2 I_{\theta}} \right) \int C_M (\dot{\alpha}) d\alpha$$

- Fig. 7.14 ..... time history of the  $\left\{ \begin{array}{l} \text{pitching moment coeff.} \\ \text{normal force coeff.} \end{array} \right.$

as a function of AOA for an airfoil oscillating at reduced frequency typical of 1/rev at three mean AOA's.

# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** (Dowell Sec. 7.2)

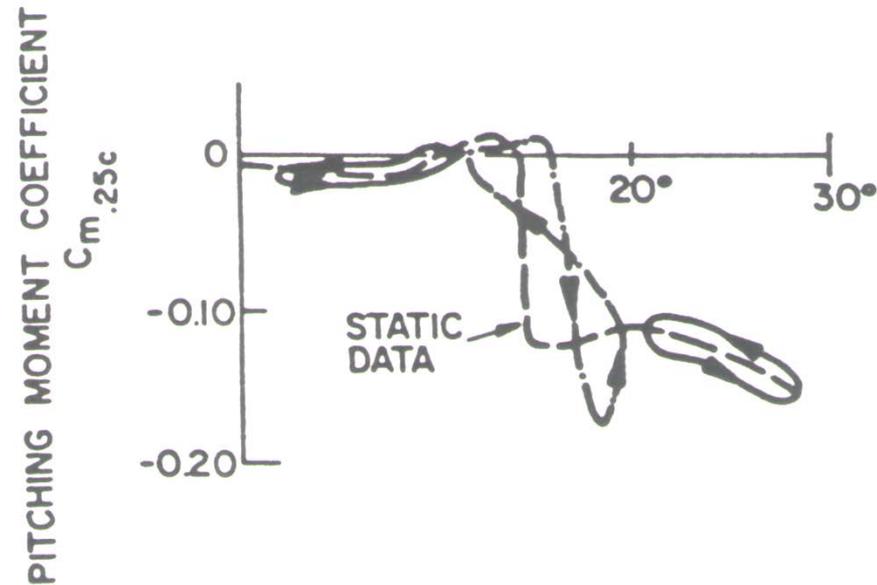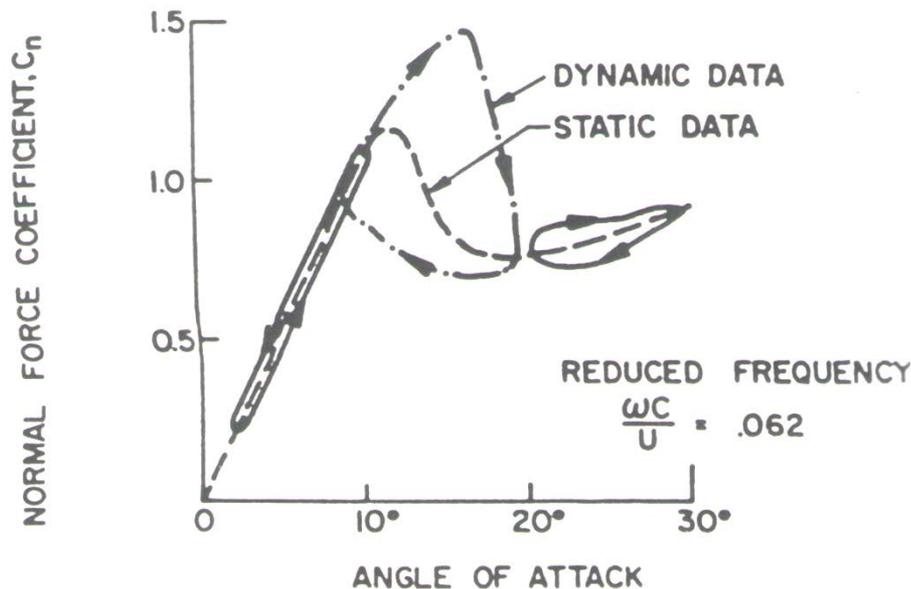

- large hysteresis loop ..... in the dynamic case when the mean AOA is small

# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** (Dowell Sec. 7.2)
    - pitching moment behaviour ..... in the vicinity of lift stall
      - average pitching moment increased markedly  
("moment stall")
      - time history looks like figure 'eight 8'
- change in energy over one cycle  $\sim \int C_M(\dot{\alpha}) d\alpha$
- value of this integral = area enclosed by the loop  
loop is traversed in a counter-clockwise direction .....  
integral is negative, dissipation, positive damping.

# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** ([Dowell Sec. 7.2](#))

Moment stall occurs statically ... no net dissipation of energy or energy is being fed into the structure (integral is positive)

→ "stall flutter"

- loss of damping at stall
- marked change in average  
pitching moment


} large torsional motion , 2.3 cycles  
of the torsion

# Helicopter Aeroelasticity

- **Stall flutter in rotorcraft aeroelasticity** (Dowell Sec. 7.2)

Fig. 7.15 ..... Typical time history of blade torsional motion when stall flutter is encountered.

→ marked increase in the vibratory loads in the blade pitch control system

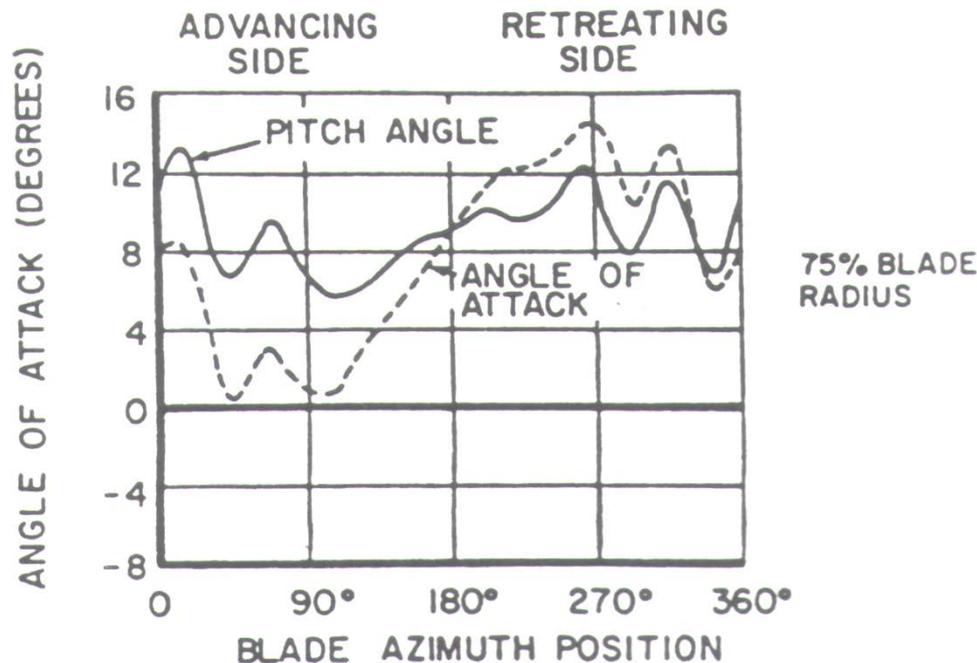

# Helicopter Aeroelasticity

- **Aeromechanical instability in rotorcraft** (Dowell Sec. 7.3)

Fig. 7.28 ..... Typical Coleman plot of the rotor-fuselage coupling. will induce ground/air resonance.

