

Image courtesy of FMC Technologies





# Flow Assurance

서유택

# What is gas hydrates?


: An ice-like solid that forms when

- i) Sufficient water is present
- ii) Hydrate former is present (i.e. C1, C2, and C3)
- iii) Right combination of Pressure and Temperature

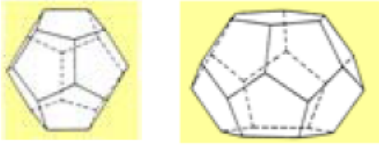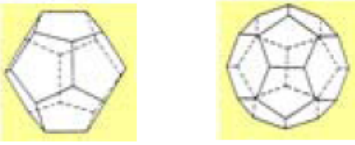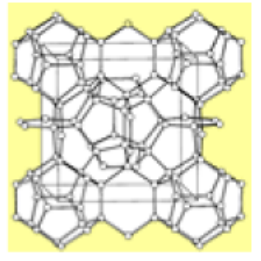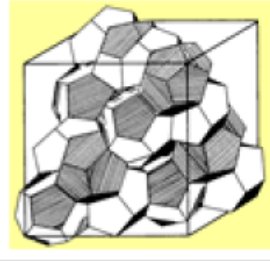Structure I	Structure II	Structure H
2 + 6 	16 + 8 	Contains 3 cavity types: small, medium, huge
SI unit cell 	SII unit cell 	Modeled as small+medium, huge
Pure components	All petroleum fluids	Huge cavity holds e.g. i-C5, neo-C6, c-C8
		Small cavities usually holds C <sub>1</sub> and N <sub>2</sub>


# Petrobras hydrate experience

- Gas dominated system
- During normal operation
  - Gradual build up until plug
- During start-up
  - Small accumulation of free water can yield localized blockage
  - A few meters of water can create hydrate plug that blocks a pipeline or subsea equipment

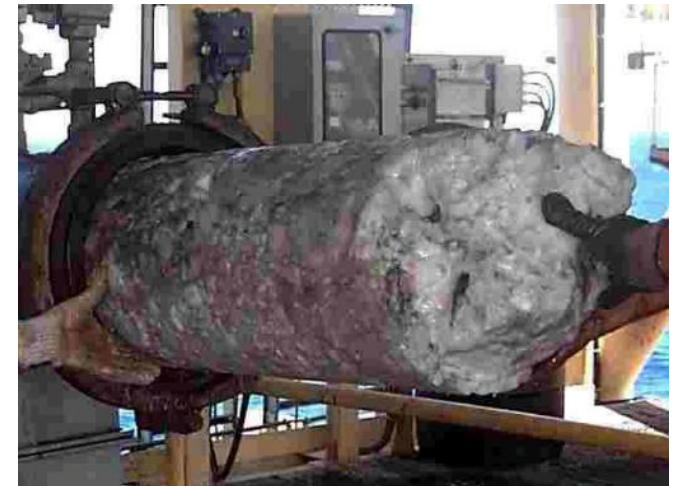


# North Sea Plug Case History


- 16inch, 22mile pipeline in UK sector
- MEG injection line had sheared
- 1.2 mile long plug
- Upstream of platform by <0.25 miles
- FPSO brought in from Stavanger
- Depressurized both sides of plug
- 8 weeks total downtime, \$3MM cost

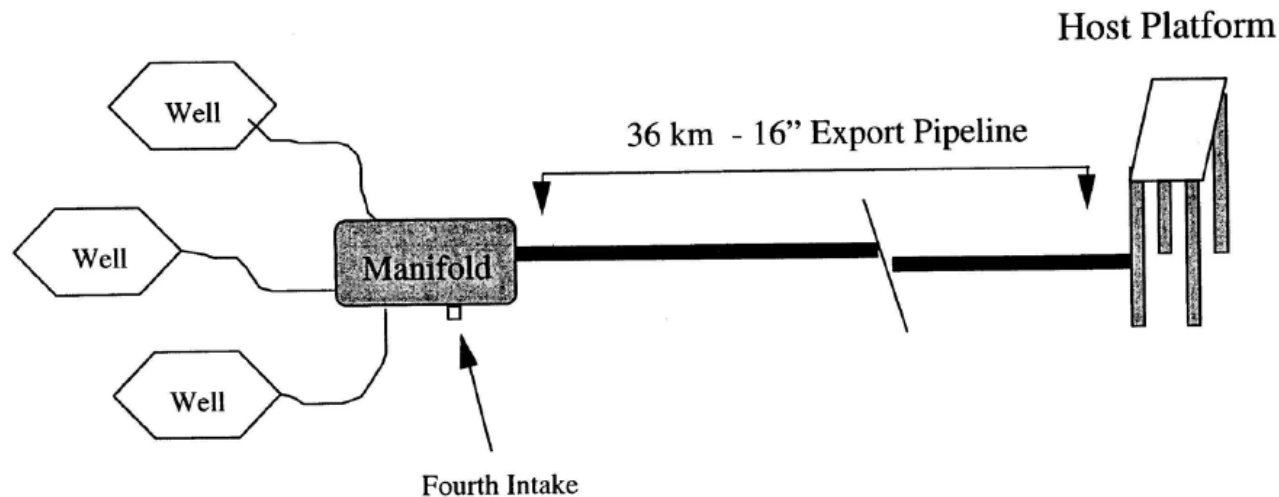

# Complete FPSO/Manifold Interface


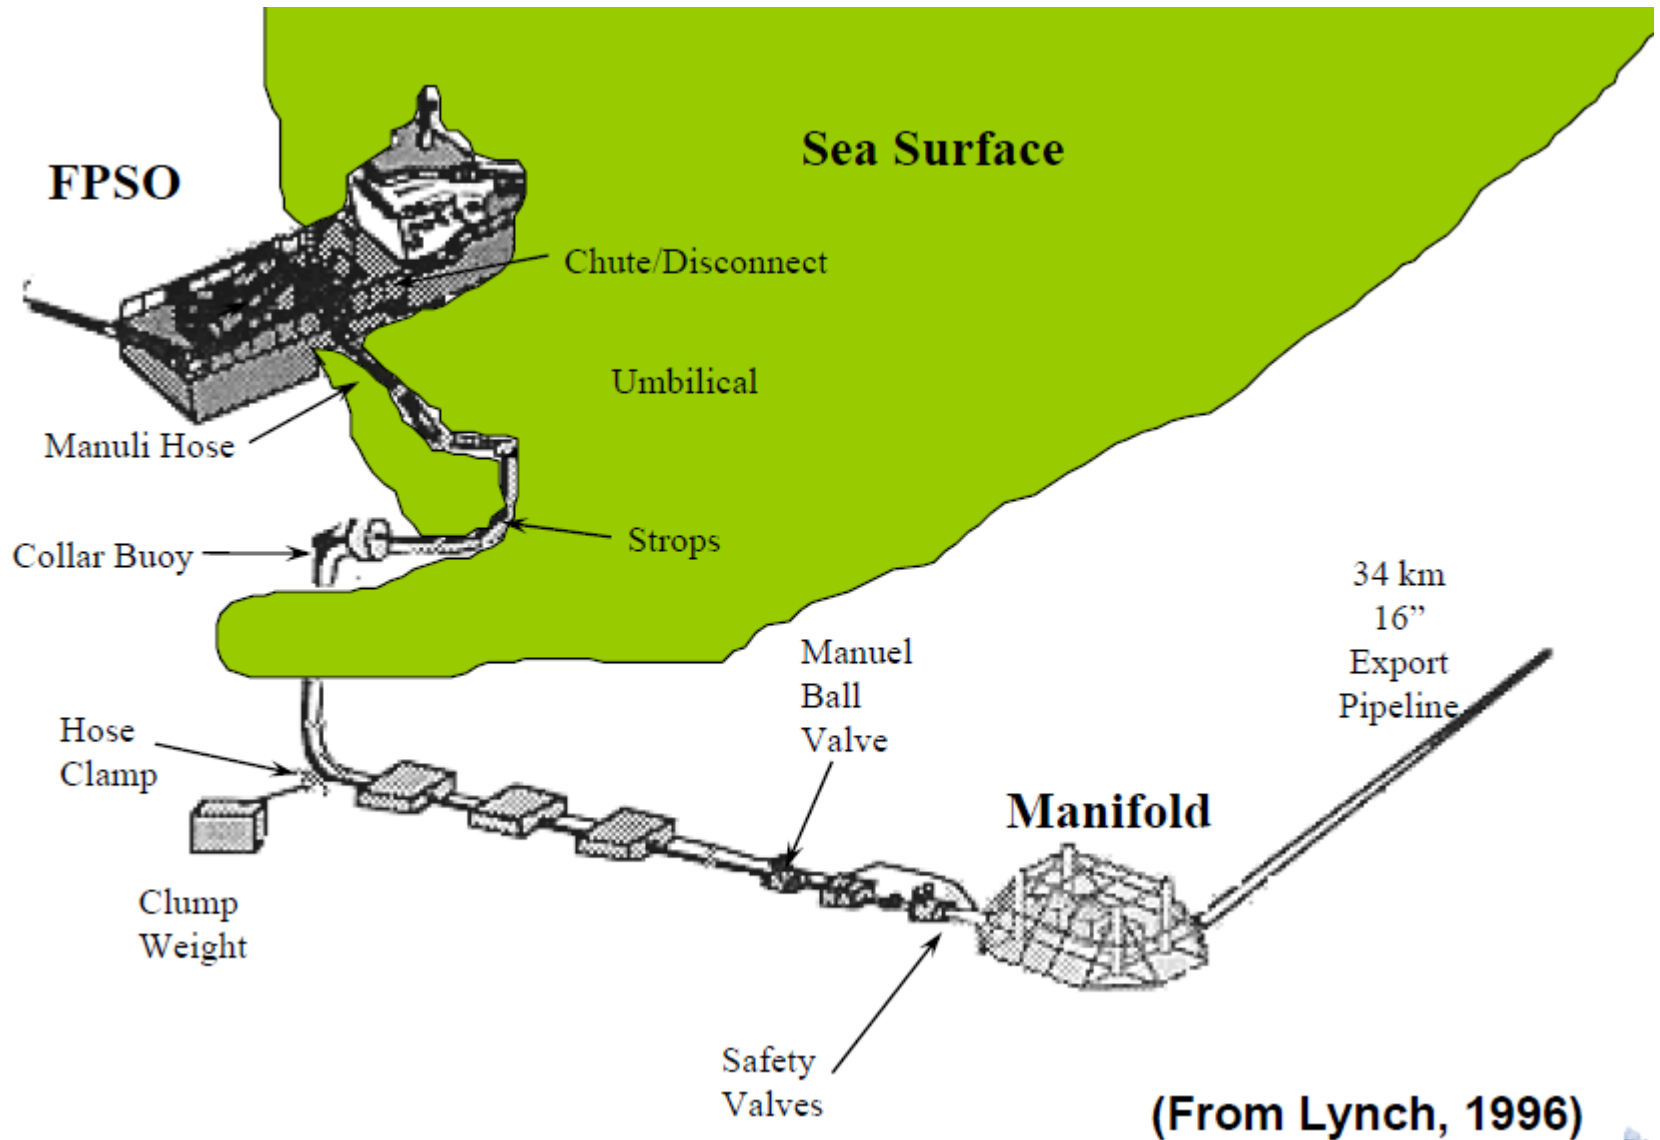


**Figure 71 - Schedule for Complete Plug Remediation**  
 (From Lynch, 1996)

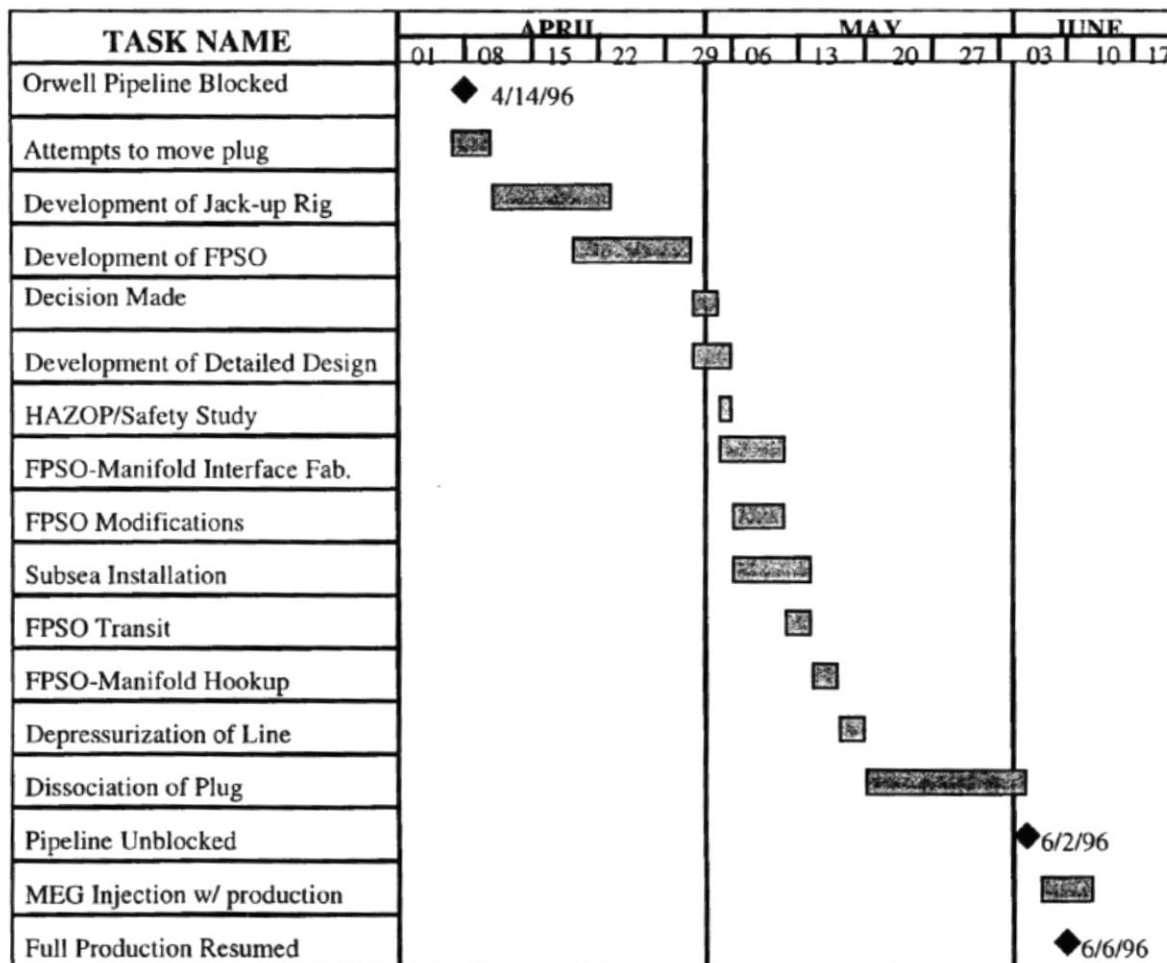


# Favorable condition for hydrate formation

- P, T profile in offshore flowlines
  - : 8.27 inch ID, 27.6 mile insulated flowline (overall U-value of 3.6 Btu/hr ft<sup>2</sup> °F)
  - : 28 API° black oil (gas gravity 0.83, GOR 200 scf/bbl)

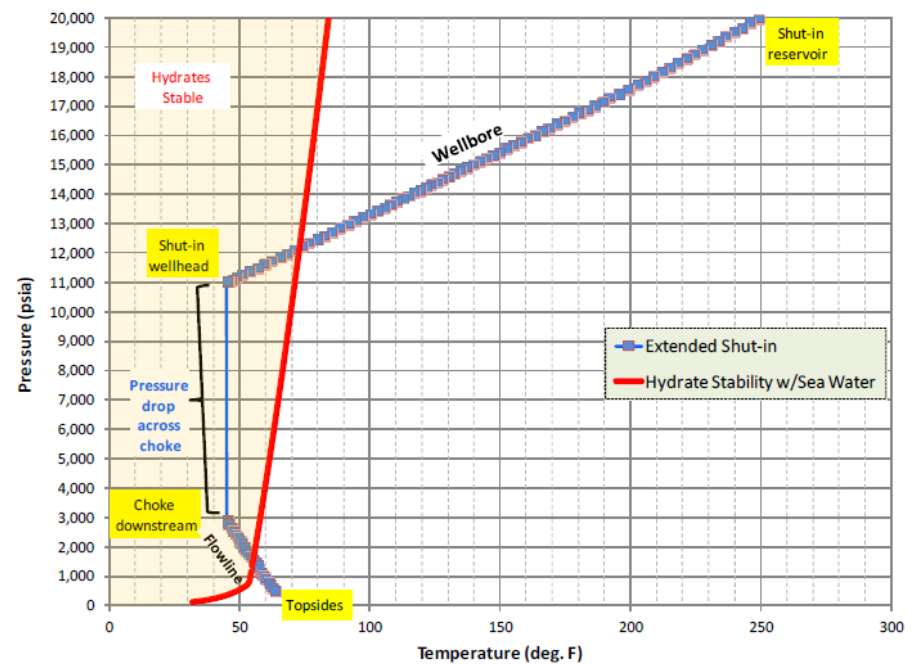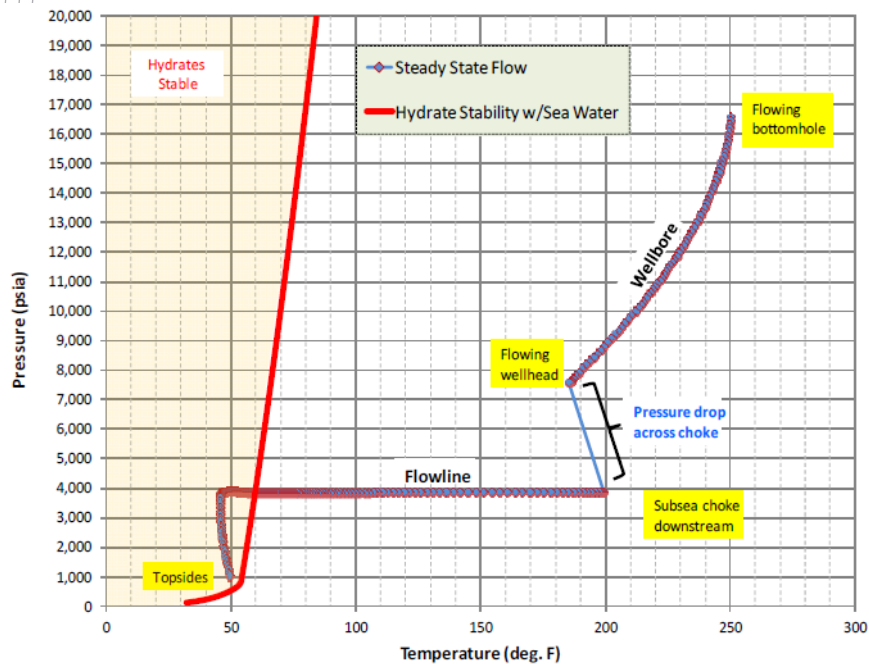


# Hydrate formation mechanism


1. Normal Operation:

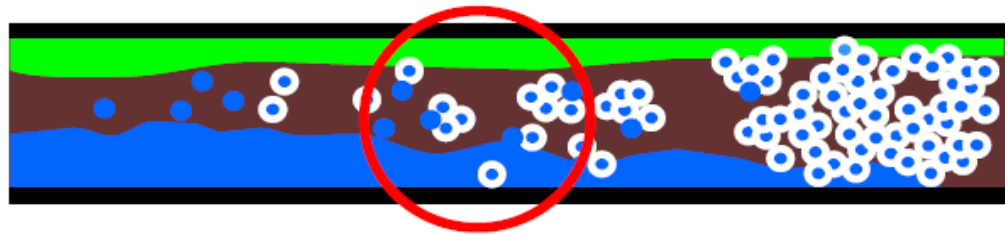

2. Shut-in:

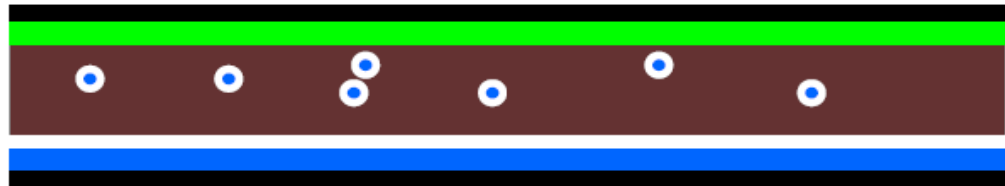

3. Restart:

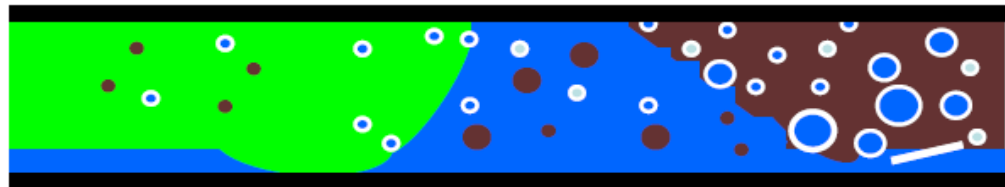


**Question: When and where will hydrates form?**



# Hydrate formation in normal operation


W/O and O/W Emulsions

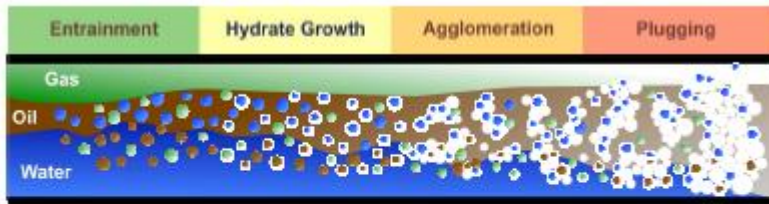

- Hydrate formation in gas condensate system

- 1) Emulsification of oil into water
- 2) Hydrate nucleation and growth
- 3) Adhesion and aggregation
- 4) Deposition
- 5) Jamming or plugging


Gas, O/W Emulsion

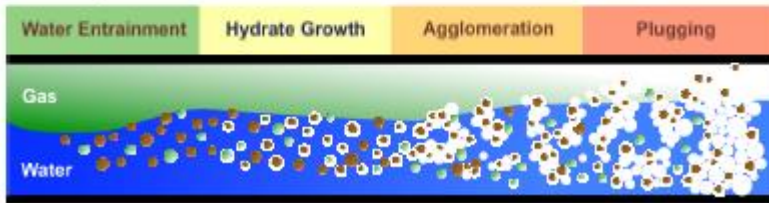

- Hydrate formation in gas system


- 1) Hydrate coating on wall
  - 2) Annulus growth of coating
  - 3) Sloughing
  - 4) Plugging
- Coating of hydrate on pipe wall is resulted from no emulsification and not enough interfacial tension
  - Pipe material can make difference

No Free Water

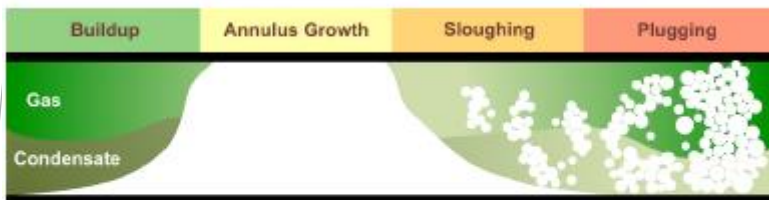


# Hydrate formation process


Torstein Austvik, Ph.D. Thesis

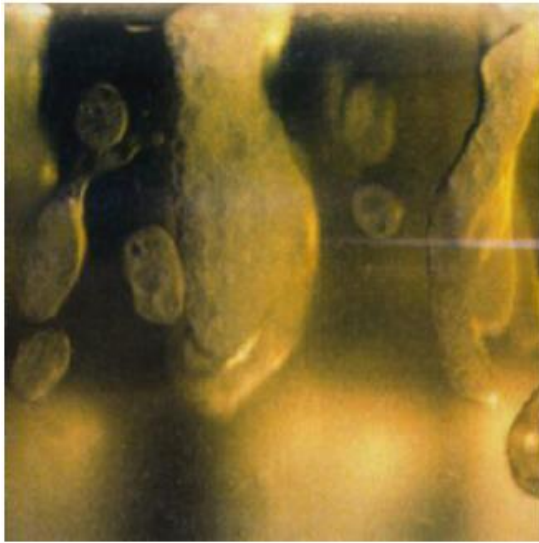

Slurry-like

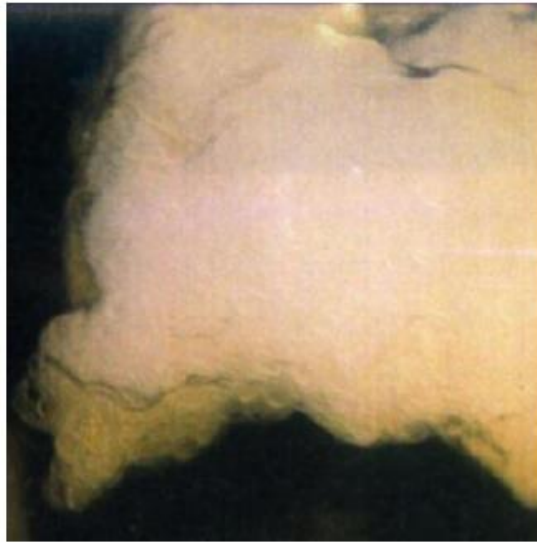


Slush-like

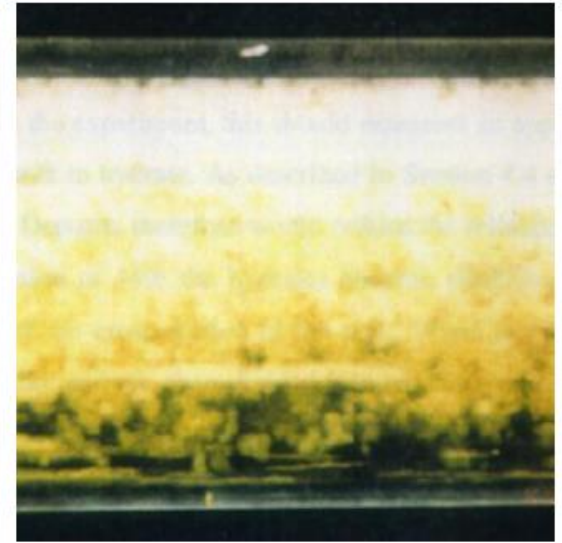


Coarse Powder

- Hydrate do not act like hard spheres
- Hydrate particles appear to aggregate (concentrated emulsion)


# Proposed hydrate deposition for annular flow

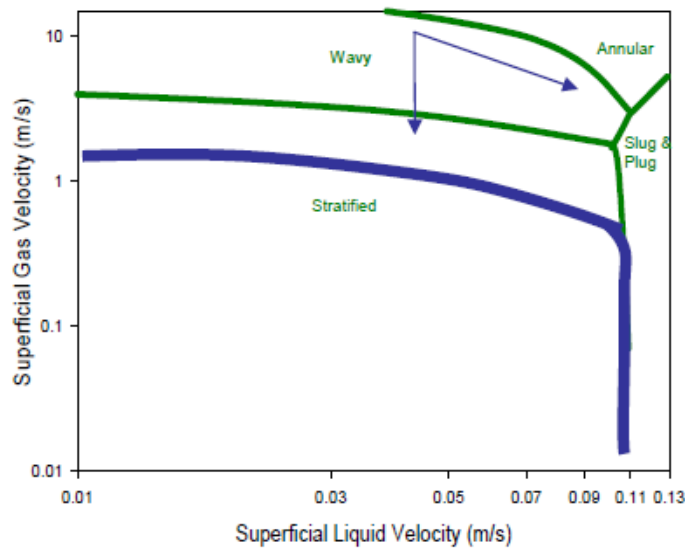

Hydrate formation on entrained droplets & annular film

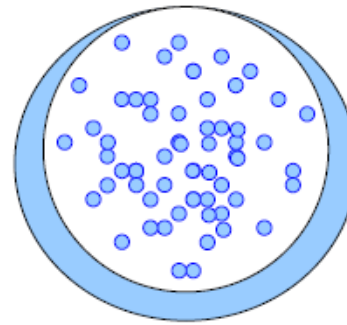


Hydrate deposits on wall forming stenosis buildup

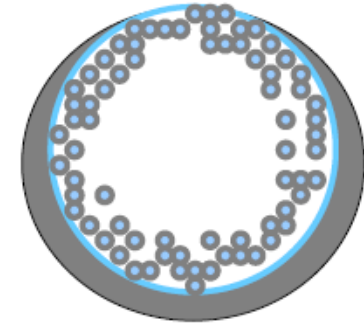


# Proposed hydrate deposition for wavy flow


## Stenosis model

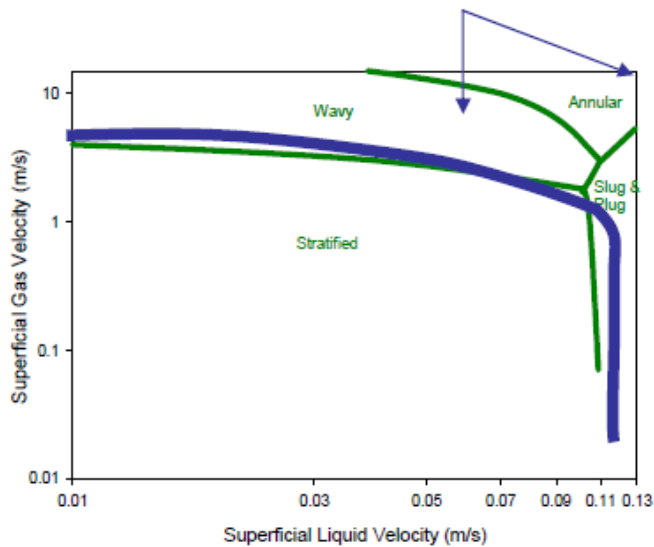


Droplets become entrained from wave crests & waves wet pipe wall




Hydrate forms on droplets and wetted wall

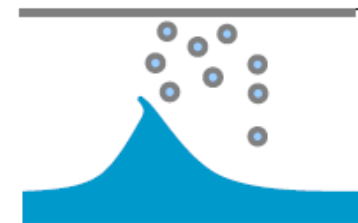


Hydrate deposits on pipe wall forming stenosis buildup in "keyhole" shape

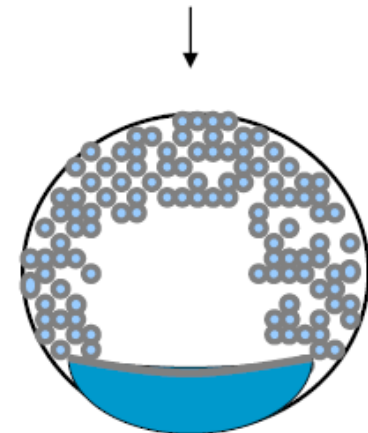


# Proposed hydrate deposition for stratified flow

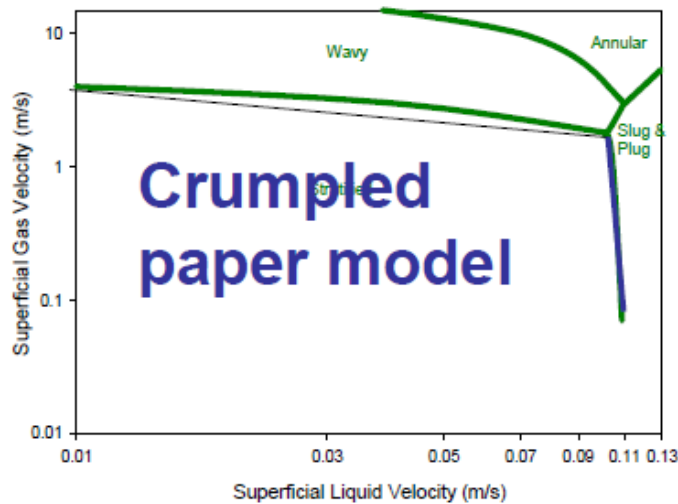

Hydrate forms a film at water gas interface in stratified flow



Hydrate film breaks




Hydrate film crumples free water is occluded




# Pipeline pressure drops due to hydrate

**50a)** Gas Line Stenosis

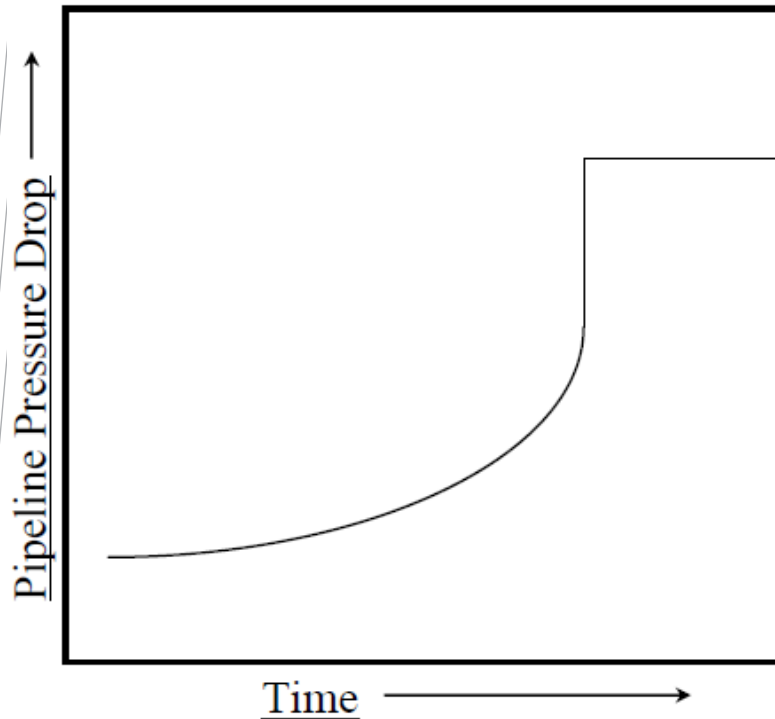

**50b)** Oil or Gas Crumpled Paper

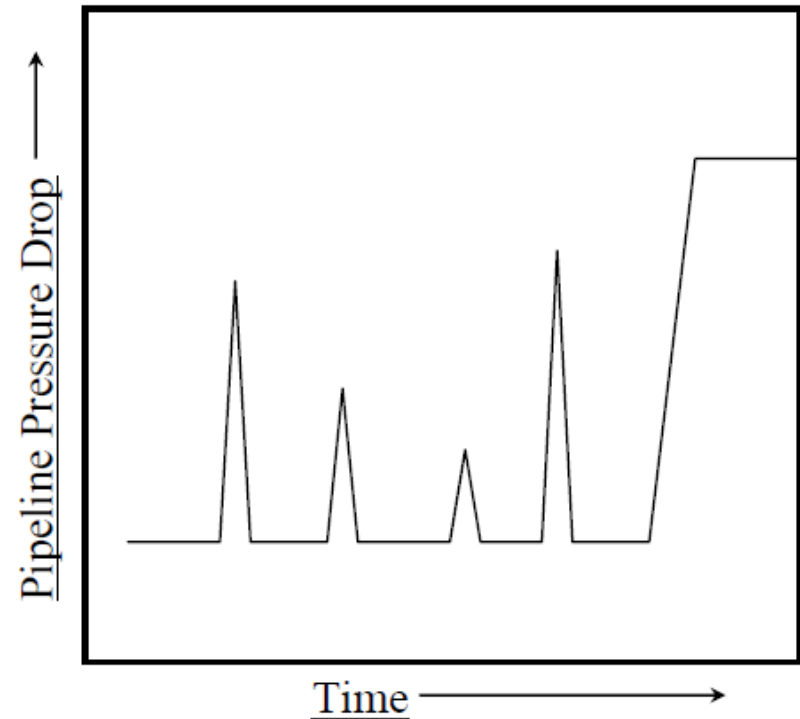

# Early warning signs of hydrates

- Inspection of pigging returns for slush
- Changes in separator rates and compositions
  - Decrease in water flow
  - Decrease in H<sub>2</sub>S gas content
- Pressure drop increases (spikes)
- Acoustic signals (pinging along pipe)


# How are hydrate plugs located?

- Locate center of plug
  - Close valve at wellhead
  - Depressurize platform end of line
  - Ratio rise in downstream vs. upstream P
- Locate downstream plug end
  - Pump gas into line from platform
  - Monitor P with time to calculate volume
  - Pipe length before plug = volume / area



# How do they dissociate?

Radial Dissociation

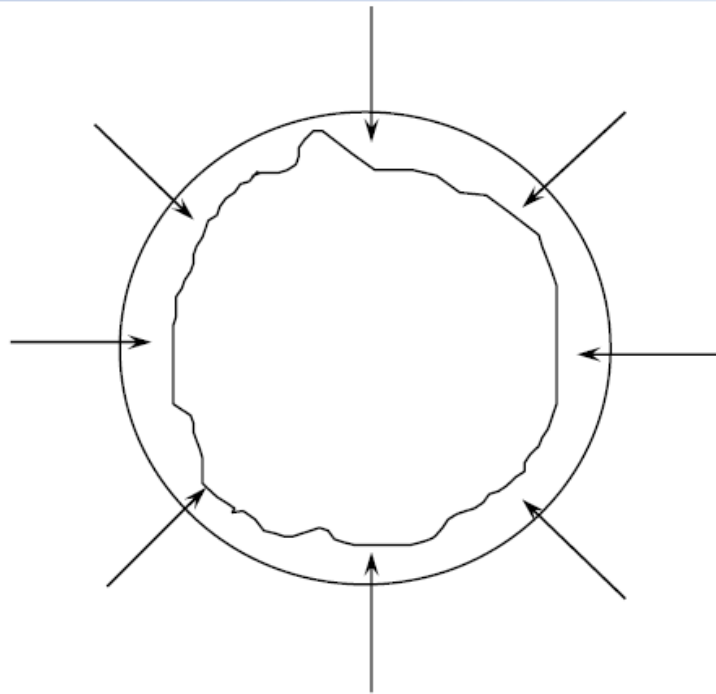

Current Model for Dissociation

Axial Dissociation



Older Model for Dissociation  
On Depressurization

# Pictures of dissociating hydrate plugs



**After 1 Hour**




**After 2 Hours**



**After 3 Hours**

# Hydrate dissociation with ice and water present

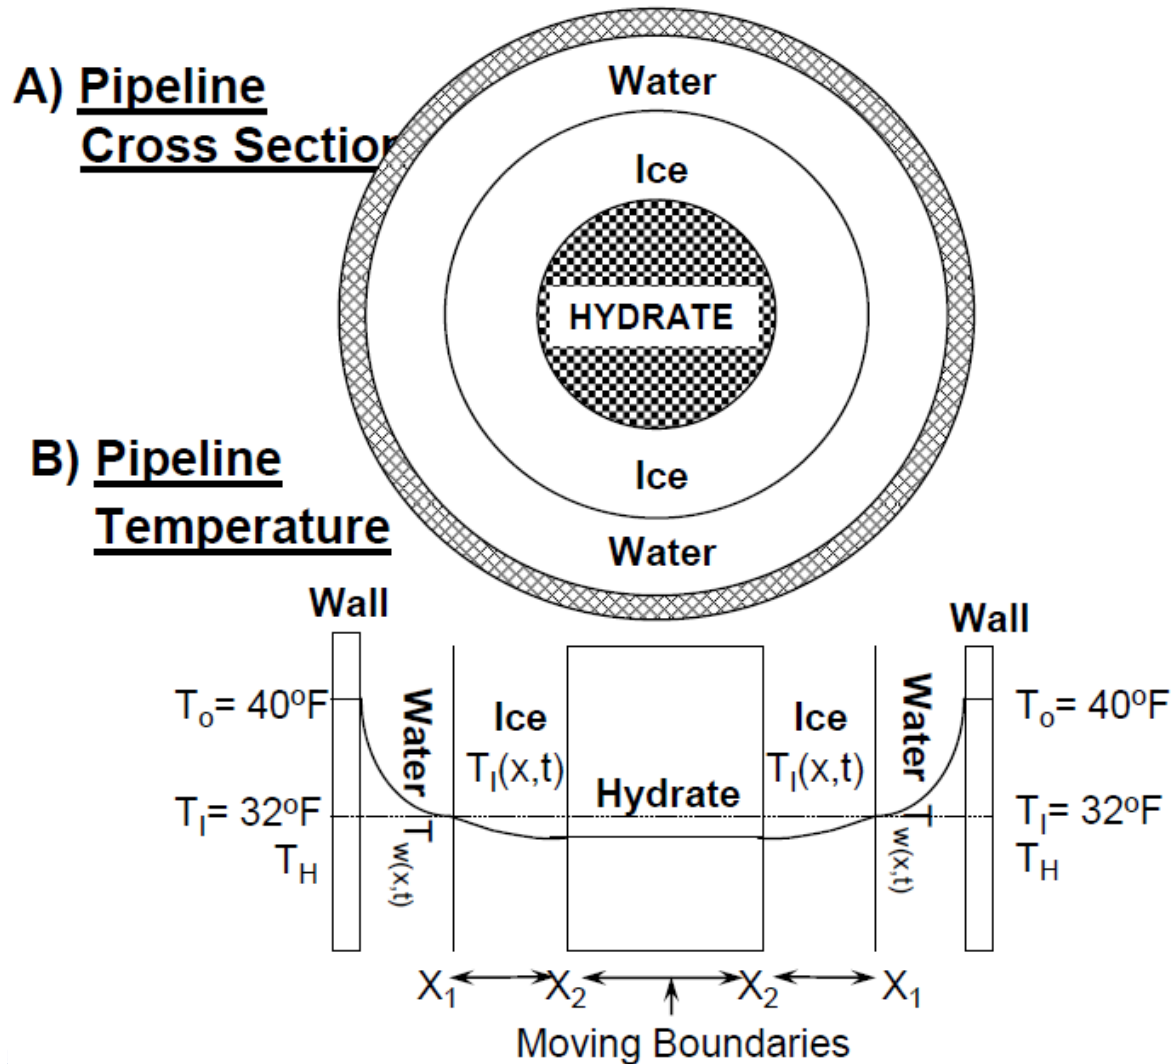


# Plug dissociation guideline

- Always dissociated: but require patience
  - Days or weeks required
  - Hourly changes ineffectual
- Cannot “blow plug out of line”
  - Causes more hydrate to form
- Depressurize lines as rapidly as safety allows
  - From both ends of plug
  - Ice formation helps transmit heat to plug

# Dissociation guidelines (cont'd)

- Depressure from one side slowly & carefully
- Difficult to locate plug & determine length
- Heating not recommended for plug
- Coiled tubing primary mechanical removal
- Liquid head can prevent dissociation
- Inject inhibitors before any shutdown
- Remove residual water after dissociation

# Hydrate formation in Werner Bolley gas line

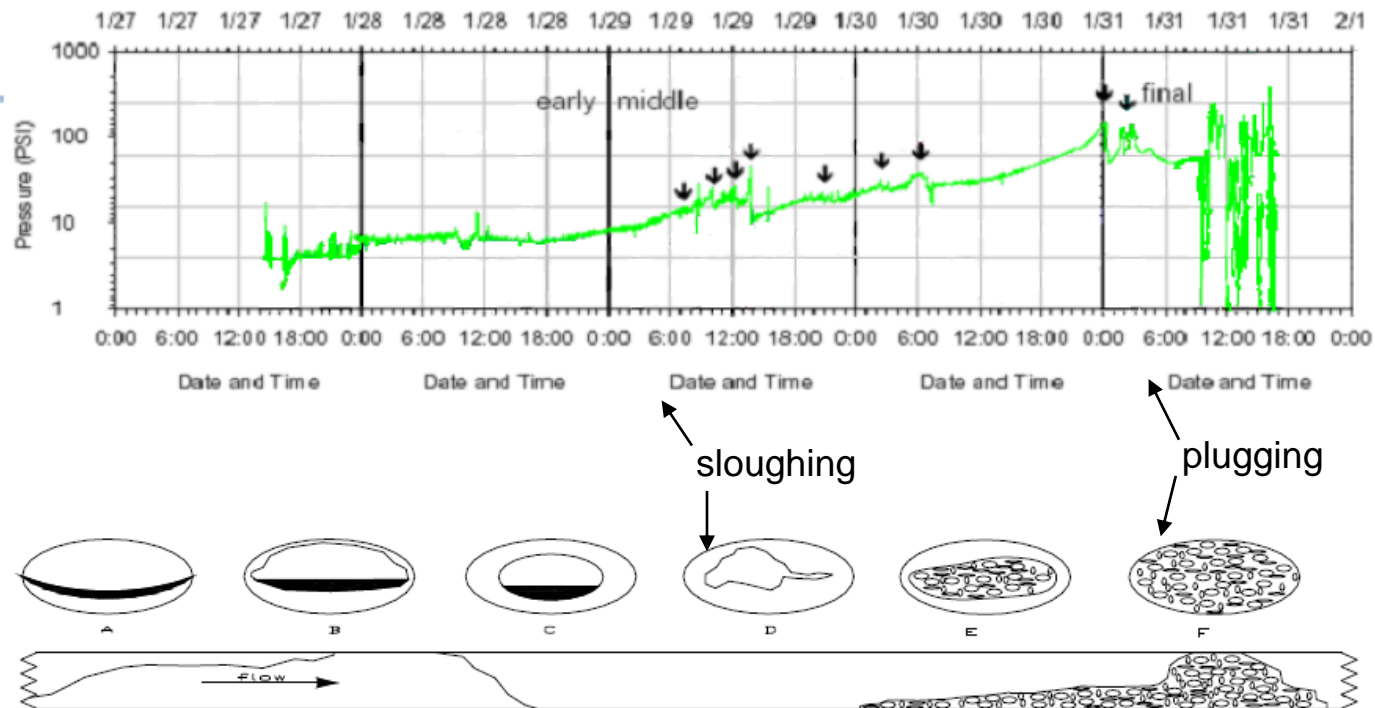

- : Hydrate formation by coating and sloughing
- : Pressure spikes by onset of hydrate and partial plug at middle
- : Pressure surge by complete plug at final

# Industry Practice: Rules of thumb

(Natural Gas Hydrates in Flow Assurance, 2011, Dendy Sloan)

- If there is no water, then hydrate will not form
- For gas systems
  - Most likely to form hydrates during normal and startup operating scenarios
  - Most likely to form hydrates in the subsea system in areas where water collect and/or areas where flow direction is changed.
  - Most likely to form hydrates in the well across the choke
- For oil systems
  - Most likely to form hydrates during startup operating scenarios
  - Most likely to form hydrates in the subsea system in areas where gas and water have broken out of solution during startup operating scenarios

# Hydrate mitigation

- Insulation
  - Pipe-in-pipe
  - Wet Insulation
- Active heating systems
  - Hot Water
  - Electric (DEH)
- Subsea Chemicals Injection
  - Methanol, MEG
  - LDHI
- Flowline Pressure Reduction
- Water removal (especially for Gas Export Pipeline)



# Thermodynamic Hydrate Inhibitors (THIs)

- Methanol

- : Low cost
- : Low viscosity
- : No fouling
- : **More toxic**
- : **Too little can be worse than none at low levels**
- : **Inefficient to recover**
- : **Reduce hydrocarbon sales value**
- : **High loss to gas phase**

- MEG

- : Less toxic
- : Under-treating not as bad
- : Efficient to recover
- : Does not affect hydrocarbon value
- : Loss to gas phase negligible
- : **High viscosity**
- : **Salts precipitation**
- : **Fouling by salt deposition**

# Application factors for THI

- Injection hardware
- Delivery & storage - large volumes
- Loss to hydrocarbon phase
- Salt precipitation
- Compatibility (materials & chemical)
- In-situ vs average water production rate
- Environmental, health & safety
- Regeneration

# Estimation of Hydrate Formation/Inhibition (Accurate to $\pm 25\%$ )

1. A pipeline pressure/temperature flow simulation should be done to determine the conditions between the wellhead and the pipeline discharge. (Pipesim, Olga, Leda, etc)
2. Hydrate formation conditions should be calculated, and pressures and temperatures of vapor and aqueous liquid inhibited by various amounts of THI should be considered. (Hammerschmidt eq., PVTsim, Multiflash, etc)
3. Calculate the amount of inhibitor injected into pipelines based on the amount of free-water phase

# Hammerschmidt equation (1934)

- Hammerschmidt proposed the first empirical equation to find the required concentration of an inhibitor X, in an aqueous solution, for lowering the hydrate formation temperature by a given amount, (°F):

$$\Delta T = \left( \frac{2335}{MW} * \frac{X}{1 - X} \right)$$

Where  $\Delta T$  temperature lowering, MW methanol molecular weight, X wt% methanol in aqueous phase. (For MEG, use 2000 instead of 2335)

- Extended equation for methanol (more accurate than the Hammerschmidt equation)


$$\Delta T = -129.6 \ln(1 - N)$$

Where N mole fraction of methanol

- The accuracy the Hammerschmidt eq is surprisingly good; tested against 75 data points, the average error in  $\Delta T$  was 5%.

# Cubic Equation of State (1980')

- Thermodynamic equilibrium

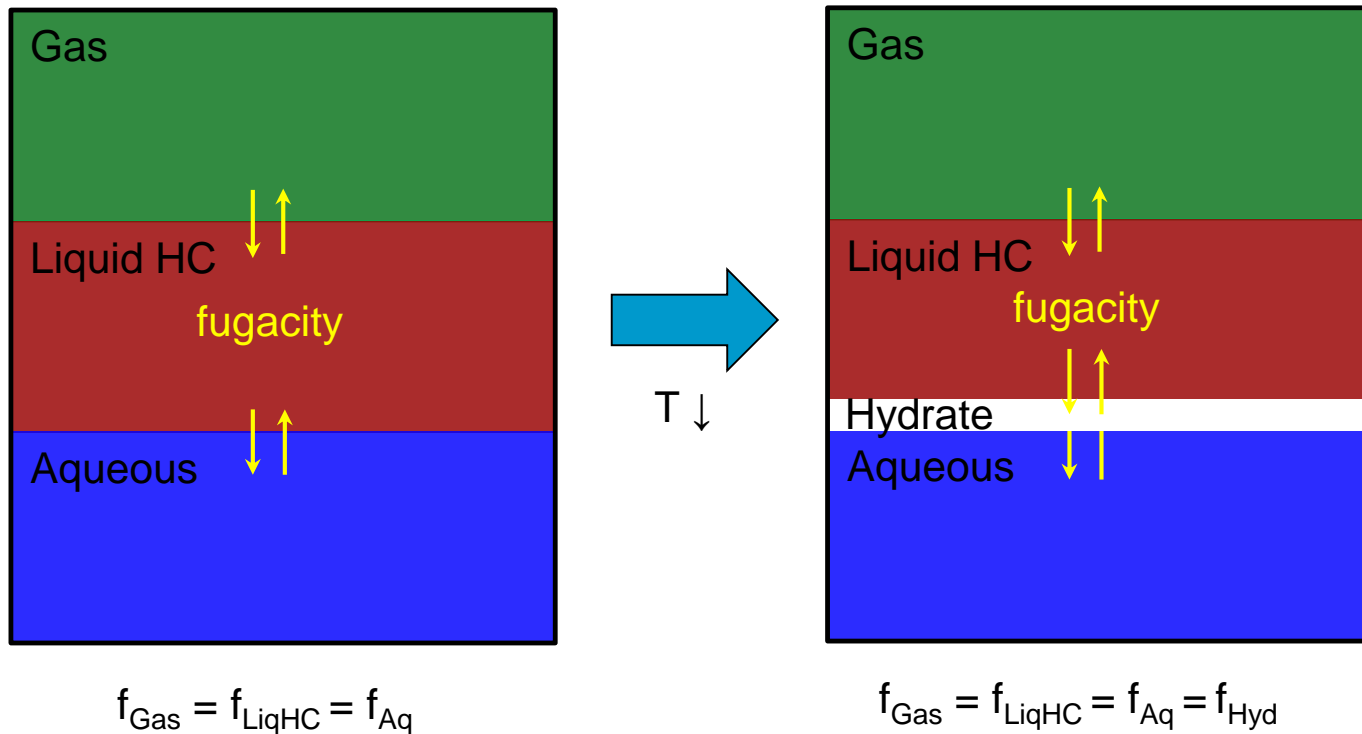

# Fugacities in hydrate equilibrium


- Fluid Phases
  - : Gas, Liquid, Aqueous
  - : Fugacities from EoS (SRK, PR, etc)
- Hydrate Phases
  - : Langmuir adsorption model
  - :  $f_{\text{hyd}} = f(\text{Langmuir Constants, Filling degree})$

$$\hat{f}_w^{\text{H}} = f_w^{\text{L}} \exp\left(\frac{\Delta\mu_w^{\text{MT-L}}}{RT} - \frac{\Delta\mu_w^{\text{MT-H}}}{RT}\right)$$

$$\Delta\mu_w^{\text{MT-H}} = RT \sum_m v_m \ln(1 + \sum_j C_{mj} \hat{f}_j^{\text{V}})$$


$$\frac{\Delta\mu_w^{\text{H}}}{RT} = \frac{\Delta\mu_w^0}{RT_0} - \int_{T_0}^T \frac{\Delta h_w}{RT^2} dT + \int_0^P \frac{\Delta v_w}{RT} dP - \ln \gamma_w X_w$$

# Effect of adding inhibitor

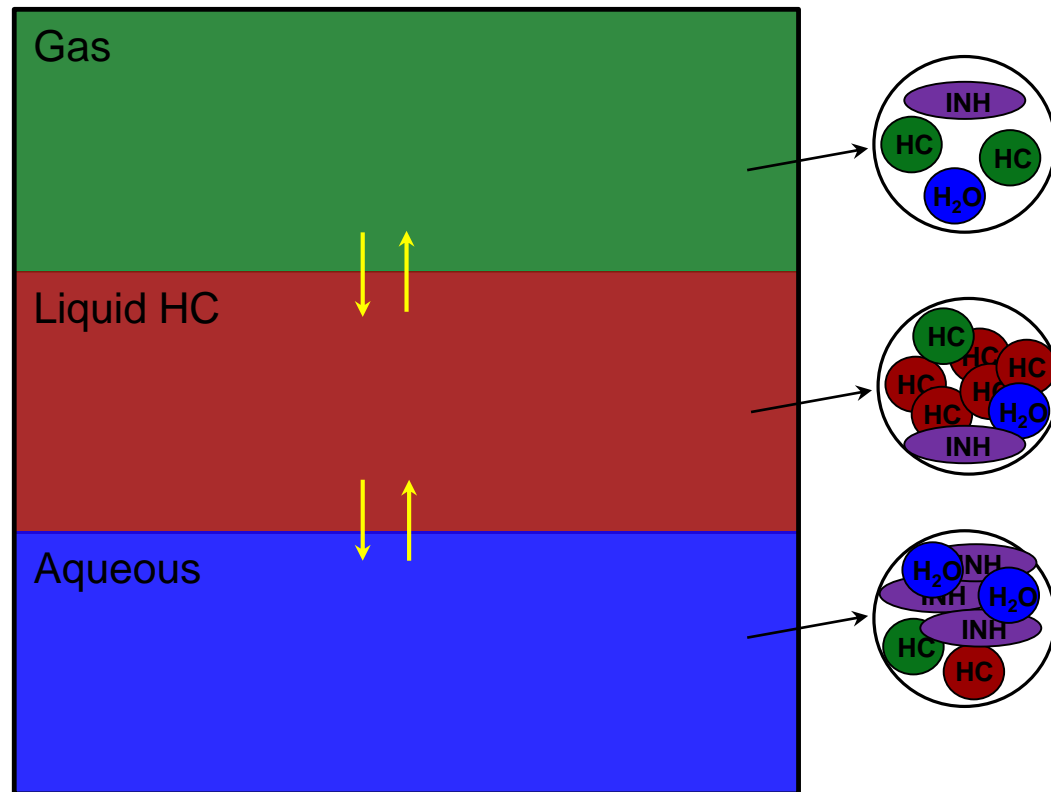


Cluster formation by hydrogen bonding  
: lowering fugacity coefficient of water in aqueous phase

# Required MEG concentration

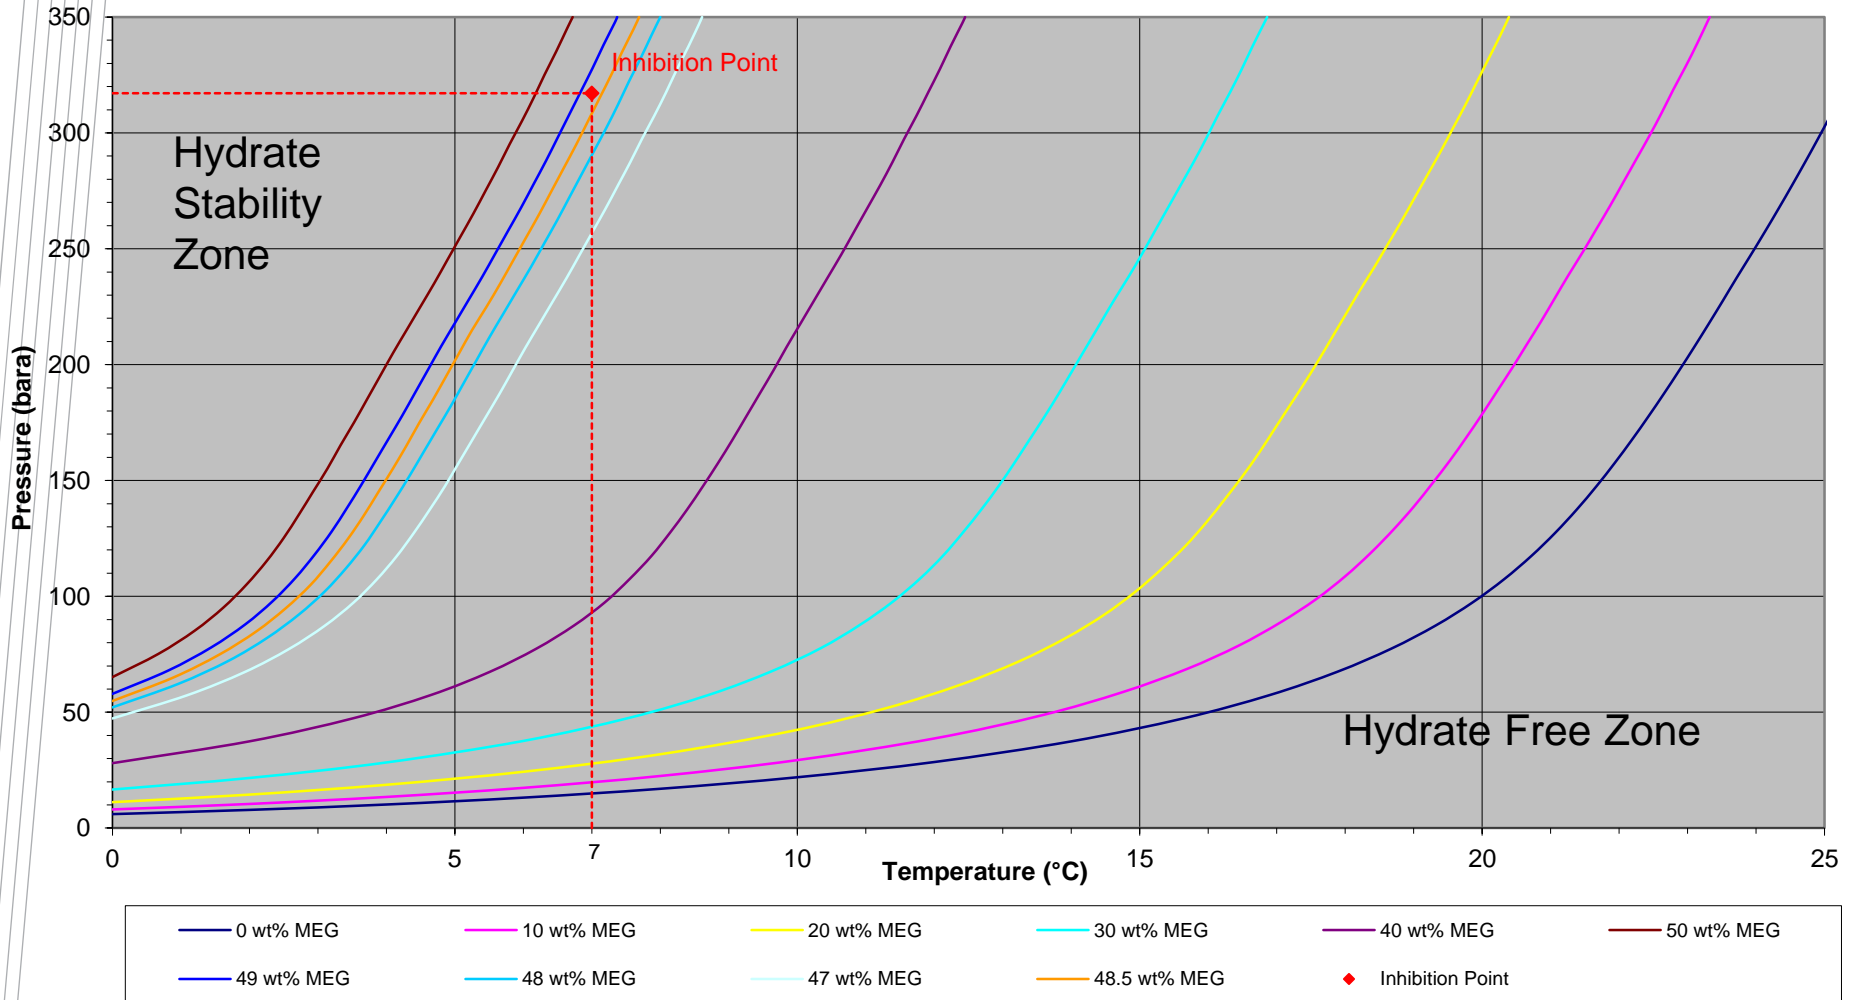



# Amount of free water

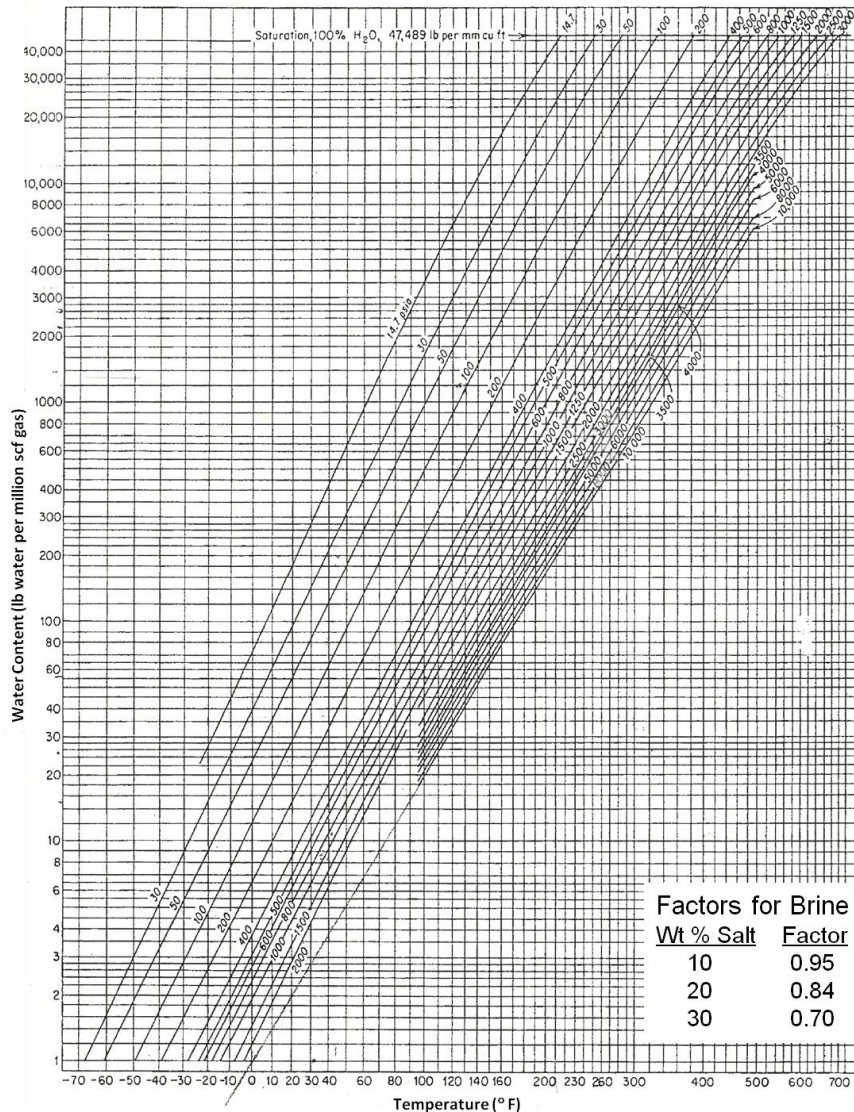

Water content of natural gas in equilibrium with liquid water.

- Using water-content chart
  - : Calculate for both inlet and outlet gas from the pipeline
  - : Subtract the water content of the outlet from the inlet to determine the free-water phase condensed per mmscf
- Using equation of state
  - : Calculate via super-saturation of dry gas under reservoir condition

# Amount of inhibitor lost to the gas and HC phase

- MEG loss to vapor is negligible
- MeOH
  - At 39°F,  $P > 1000$  psi, MeOH lost to vapor phase is 1 lbm MeOH/mmscf for every wt% MeOH in the free-water phase (i.e. 27 wt% MeOH indicates 27 lbm MeOH/mmscf lost to vapor)
  - When the MeOH vapor loss can be substantially higher, ex) low water amount, it is recommended to use  $K_v$  for MeOH ( $=Y_v/X_{eq}$ )
$$K_v = \exp(5.706 - 5738(1/T(^{\circ}R)))$$
  - MeOH loss to liquid HC (correlation for  $CH_4$ ,  $C_3H_8$ , n-heptane)
$$K_v = \exp(5.90 - 5404.5(1/T(^{\circ}R)))$$
- The total amount of MeOH injected to pipeline is therefore MeOH in aqueous phase + MeOH in gas + MeOH in condensate

# Physical properties of MEG

- Pure MEG is given for reference only. Lean MEG or MEG90 (a mixture of 90 wt% MEG and 10 wt% water) is the fluid used for hydrate inhibition.
- MEG density at 10.0 °C

Component	Density
Pure MEG	1118.4 kg/m <sup>3</sup>
MEG90	1105.3 kg/m <sup>3</sup>

- MEG90 will be transported at high pressure in the MEG distribution system, umbilicals and flowlines.
- It is important to know the physical properties of Lean MEG at elevated pressures and temperatures.

