



7. Wavefront Modulators and Detectors

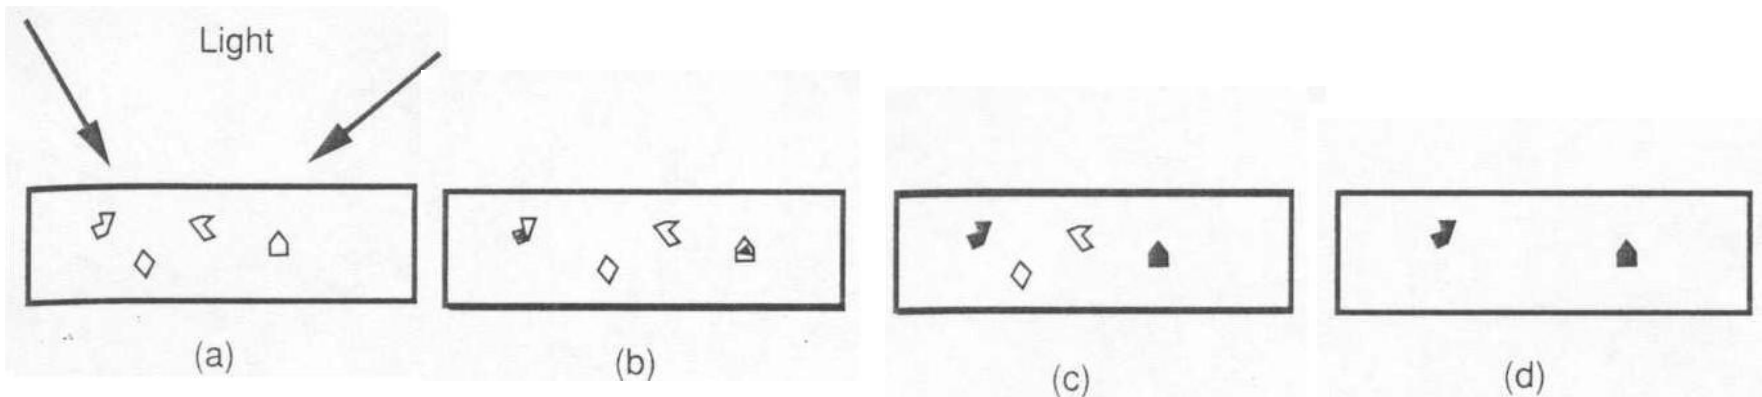

Photographic Film (I)

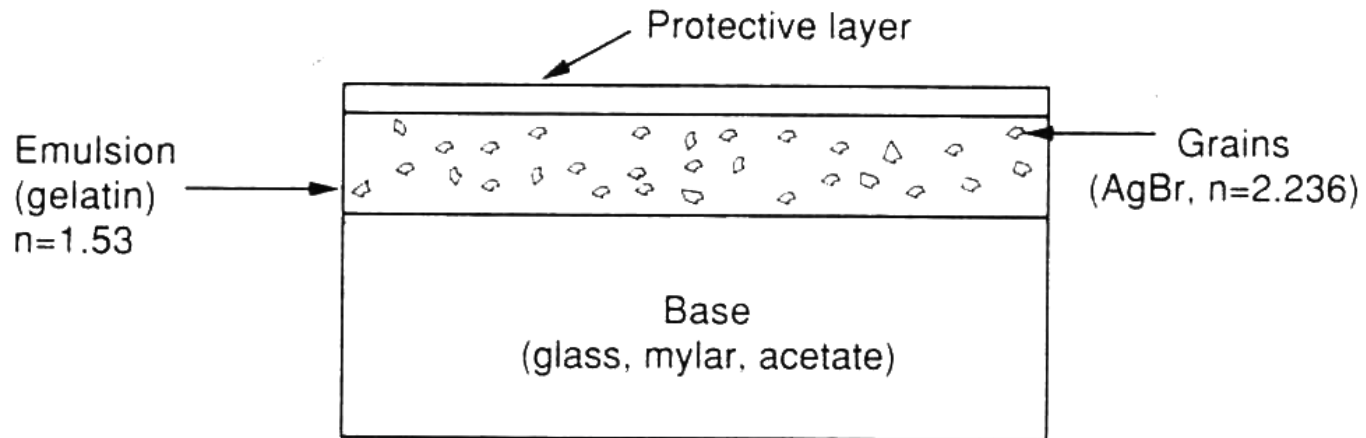

Exposure

Latent image

After development

After fixing



Photographic Film (II)


- Exposure $E(x, y) = I(x, y)T$

- Intensity Transmittance

$$\tau(x, y) = \frac{\text{local } \left\{ \begin{array}{l} I \text{ transmitted at } (x, y) \end{array} \right\}}{\text{average } \left\{ \begin{array}{l} I \text{ incident at } (x, y) \end{array} \right\}}$$

- Photographic density

$$D = \log_{10} \left(\frac{1}{\tau} \right)$$

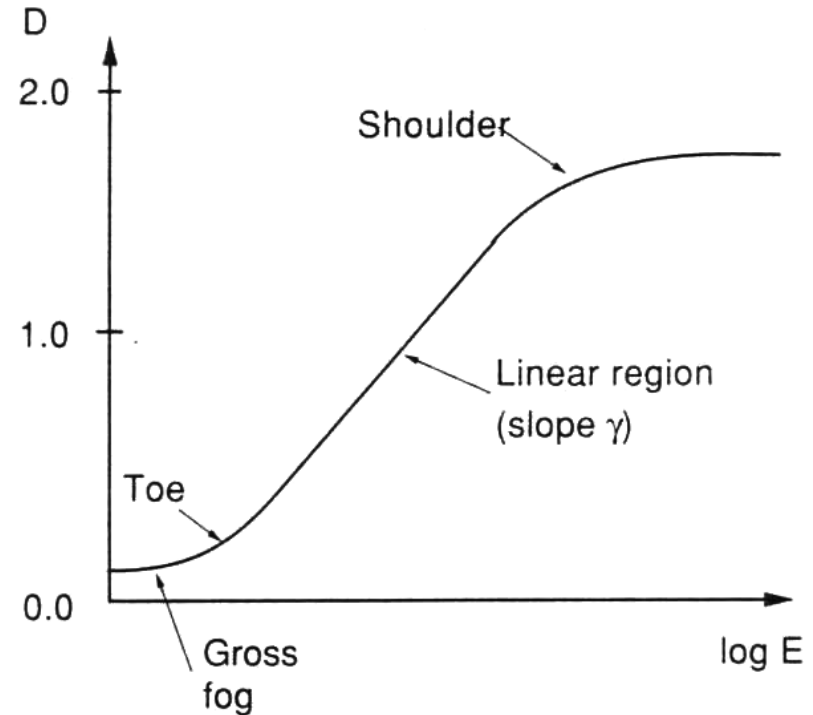


Hurter-Driffield curve

Bleaching of Photographic Emulsions



(a)

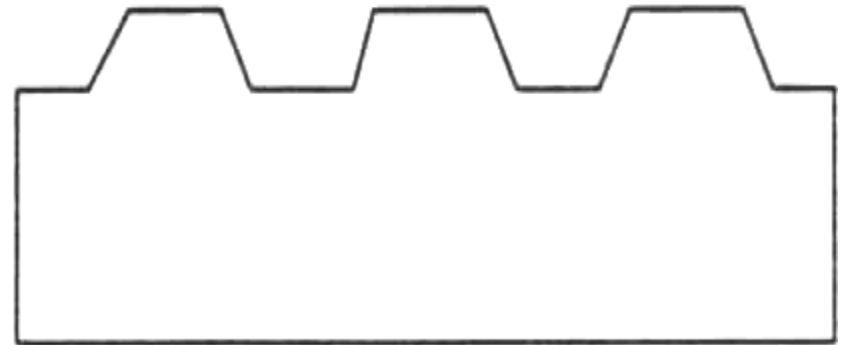


(b)


Tanning bleach




Photoplastic Device

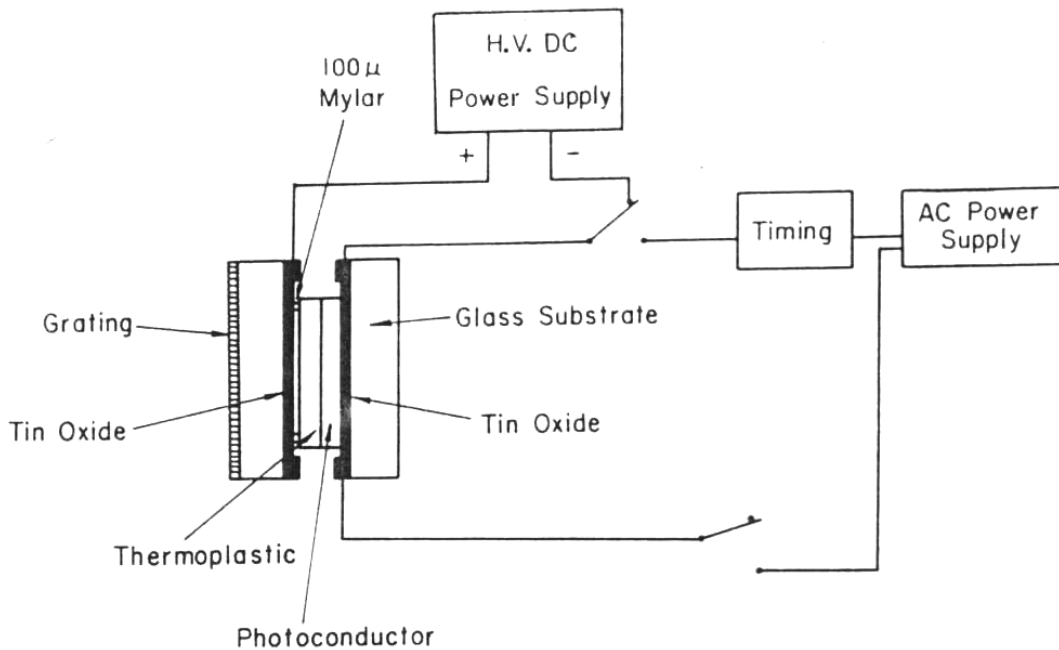


Charge



Expose




Recharge




Develop



Erase




Liquid Crystal (I)

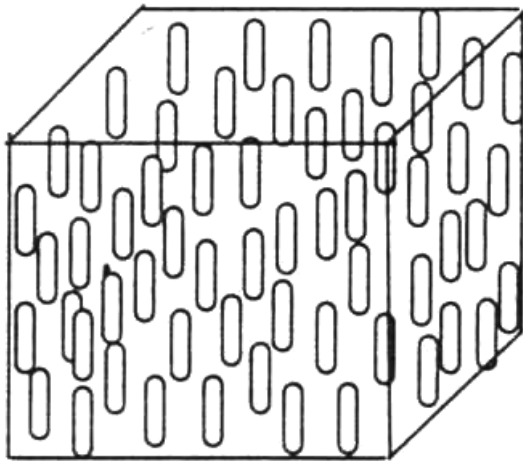


(a)

Nematic LC

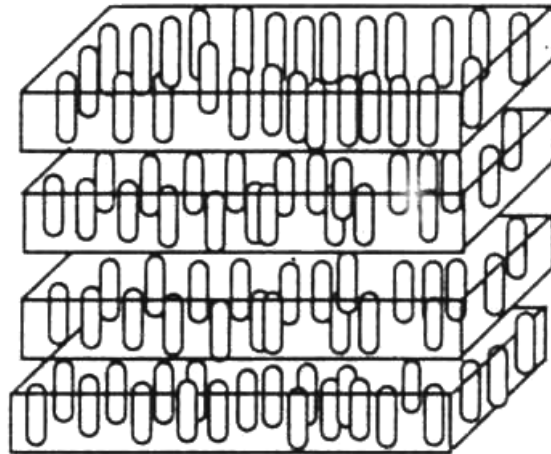

(b)



Smectic LC

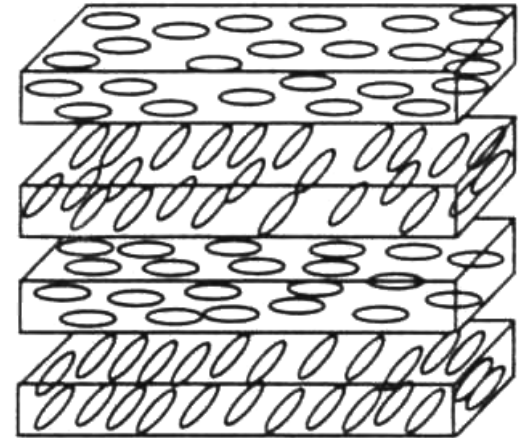

(c)


Cholesteric LC

Liquid Crystal (II)

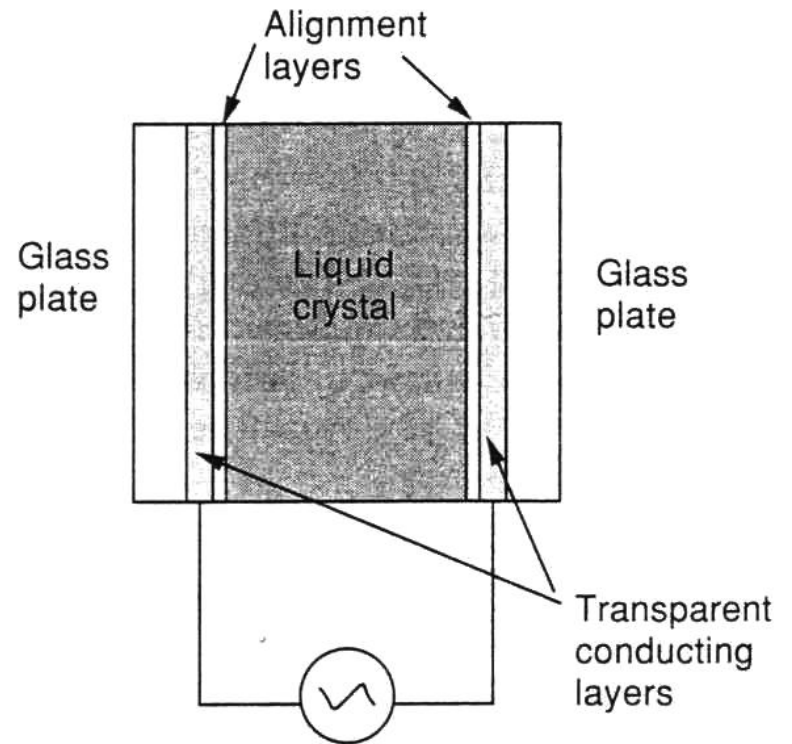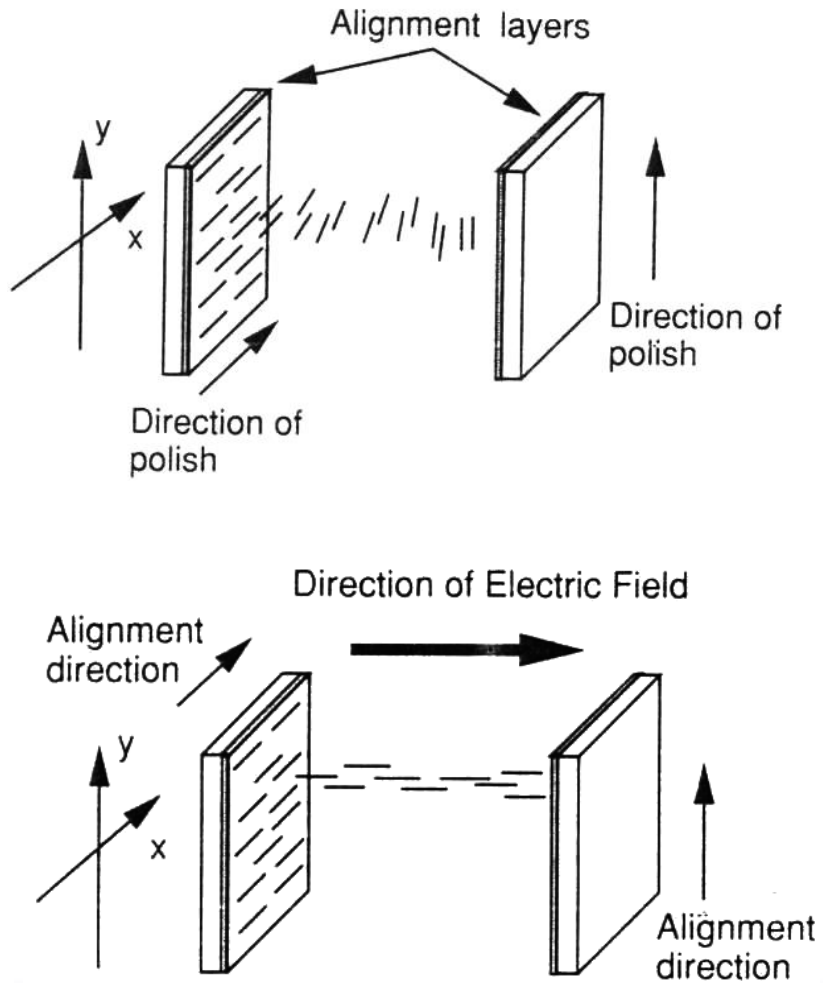

Liquid Crystal (III)

Ferroelectric
liquid crystal

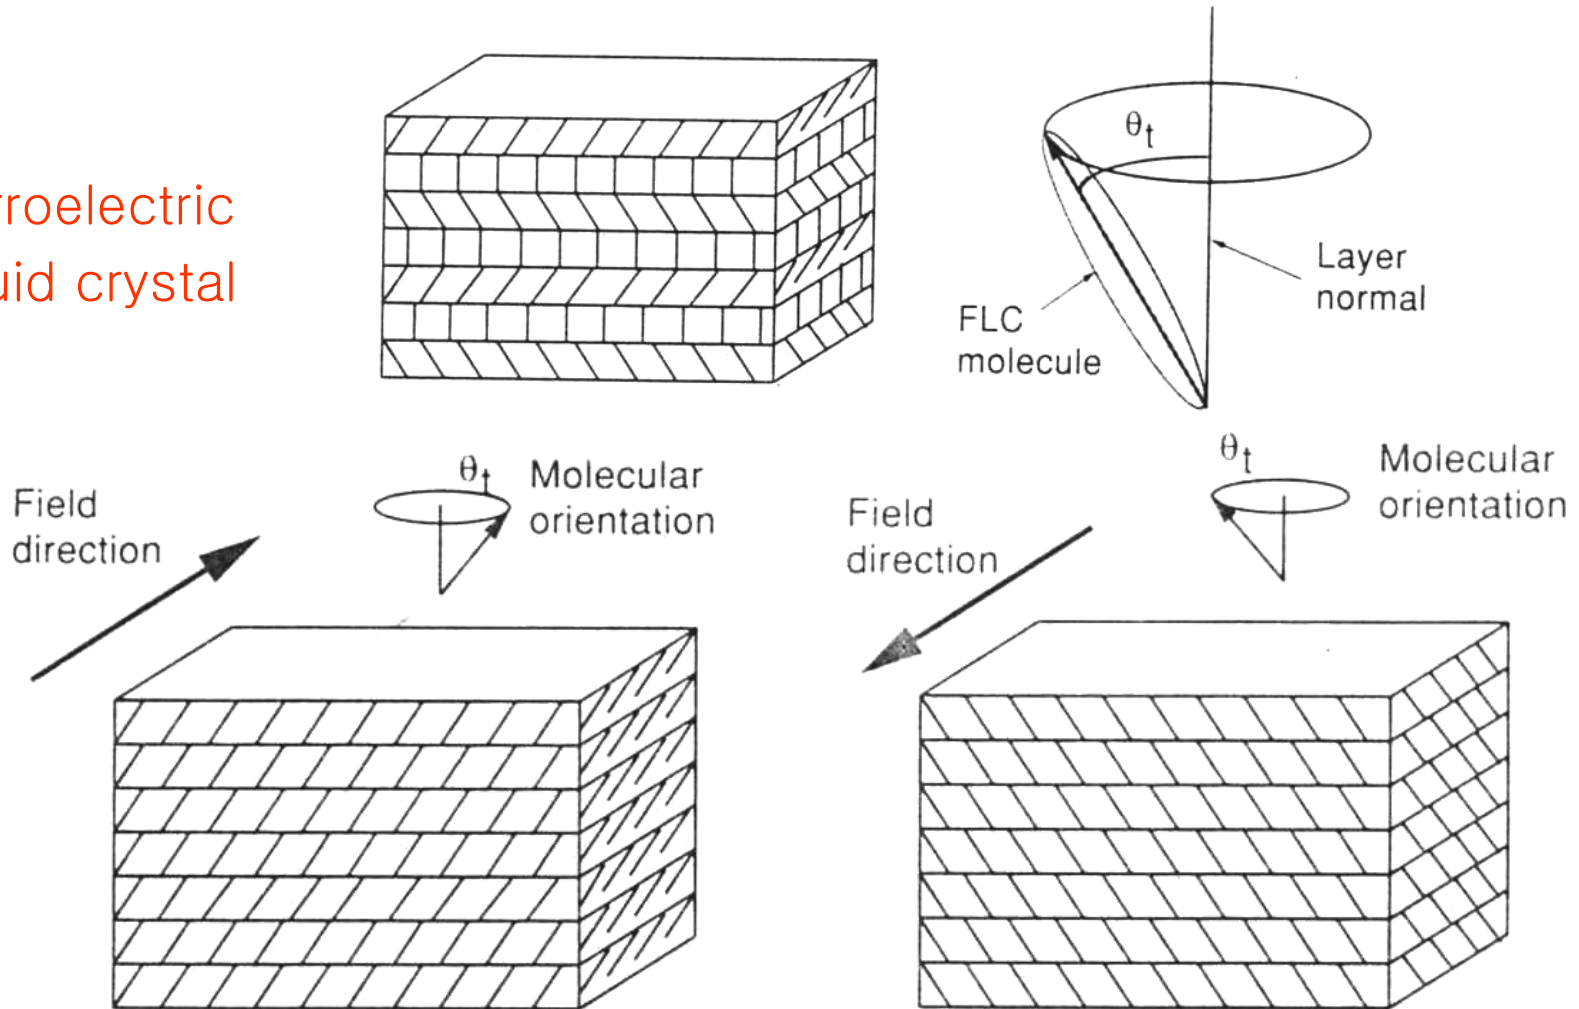

Jones Calculus (I)

$$\vec{U} = \begin{bmatrix} U_x \\ U_y \end{bmatrix}$$

Linearly polarized in the x direction : $\begin{bmatrix} 1 \\ 0 \end{bmatrix}$

Linearly polarized in the y direction : $\begin{bmatrix} 0 \\ 1 \end{bmatrix}$

Linearly polarized at +45 degrees : $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix}$

Right - hand circularly polarized : $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -j \end{bmatrix}$

Left - hand circularly polarized : $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ j \end{bmatrix}$

$$\vec{U}' = \mathbf{L}\vec{U} = \begin{bmatrix} l_{11} & l_{12} \\ l_{21} & l_{22} \end{bmatrix} \vec{U}$$



Jones Calculus (II)


$$\mathbf{L} = \mathbf{L}_N \cdots \mathbf{L}_2 \mathbf{L}_1$$

$$\mathbf{L}_{rotate}(\theta) = \begin{bmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{bmatrix}$$




$$\mathbf{L}_R(\theta) = \mathbf{L}_{rotate}(-\theta) = \begin{bmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{bmatrix}$$

$$\mathbf{L}_{retard}(\Delta) = \begin{bmatrix} 1 & 0 \\ 0 & e^{-j\Delta} \end{bmatrix}$$



$$\Delta = \frac{2\pi(n_X - n_Y)d}{\lambda_0}$$

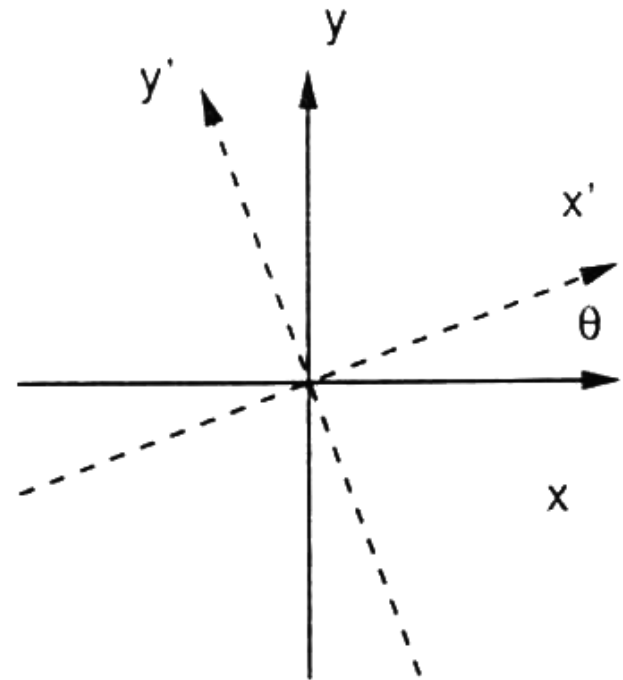

Liquid Crystal Light Valve

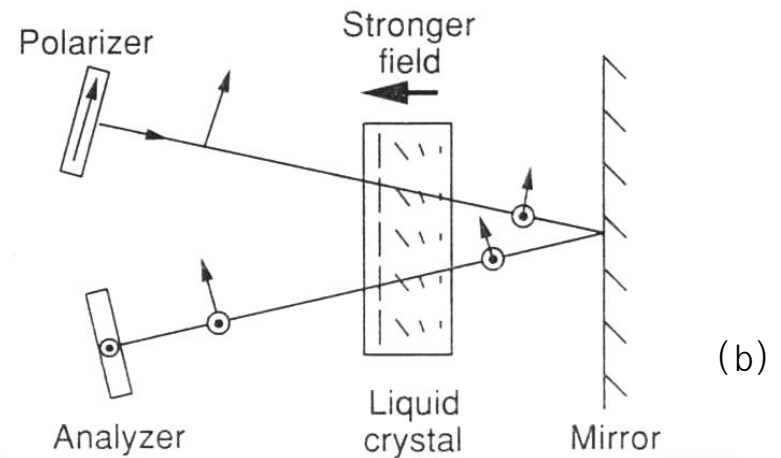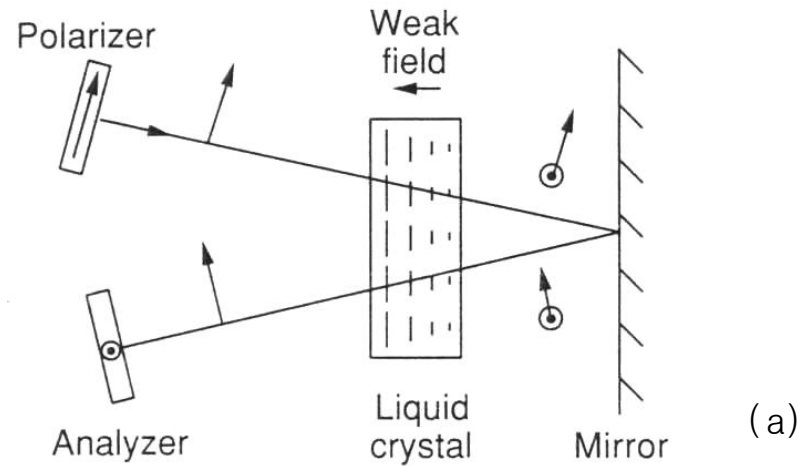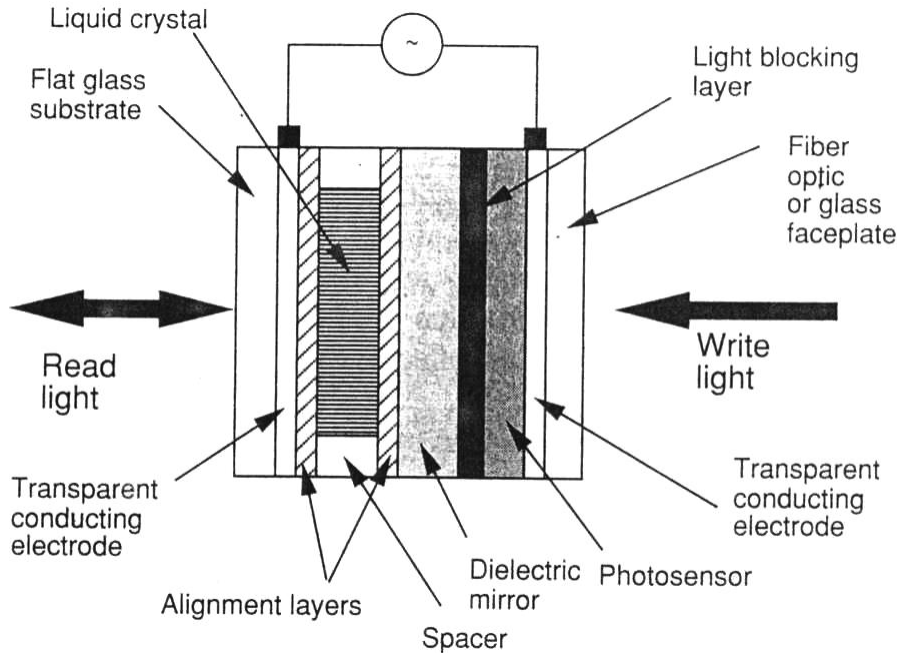

Liquid Crystal TV

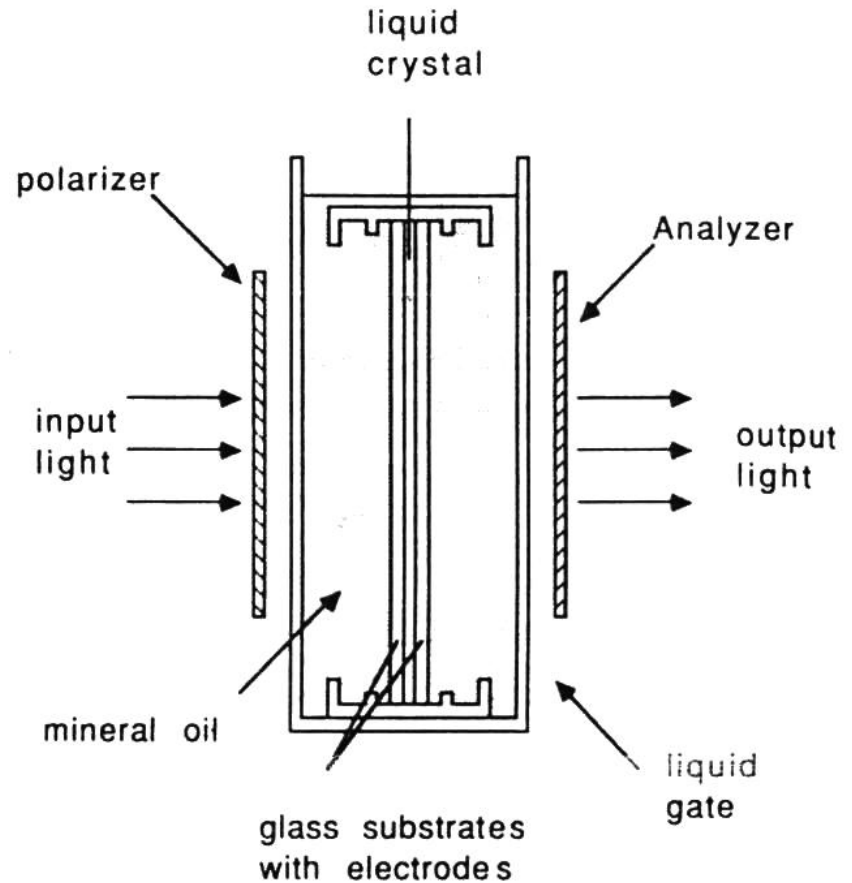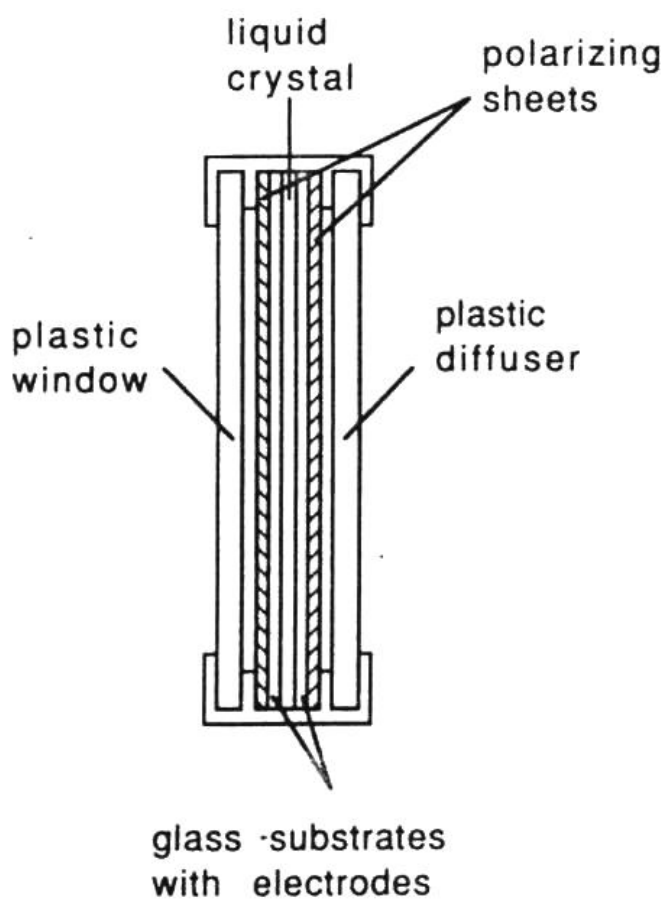

Liquid Crystal Modulators

Amplitude and Phase modulation

✓ N.Konforti et al., Opt. Lett. **13**, 251 (1988)





Freedericksz transition threshold $< V <$ Optical threshold

Tilt angle increases as V increases while twist angle remains unchanged.

Effective birefringence is reduced. Waveguiding effect still exists.



Phase modulation is possible.

No amplitude modulation

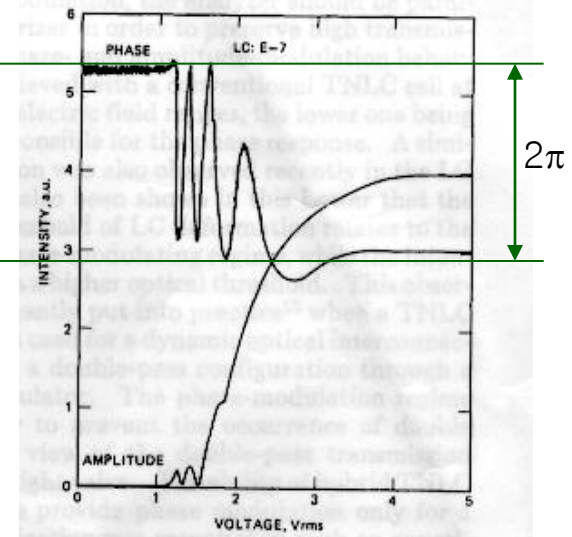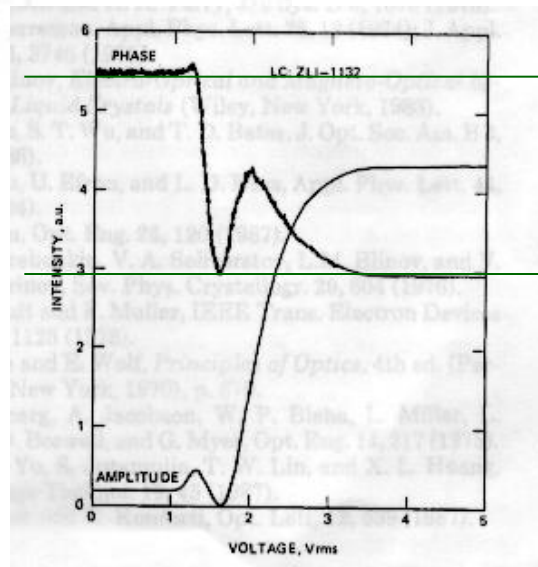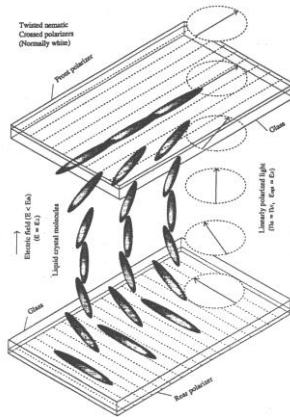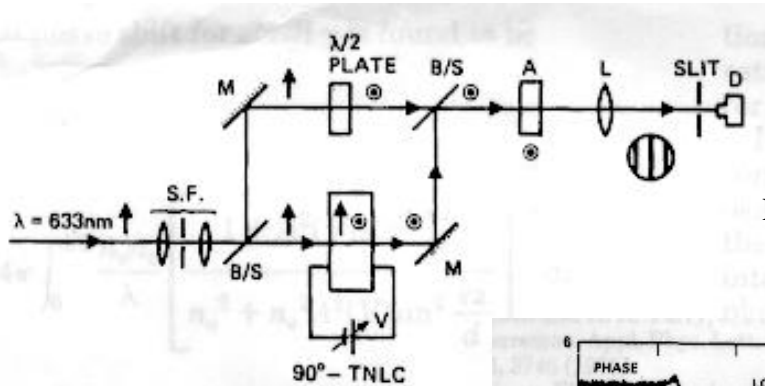

Phase-Type Spatial Light Modulators

- Dynamic encoding
 - ✓ Phase-type SLMs

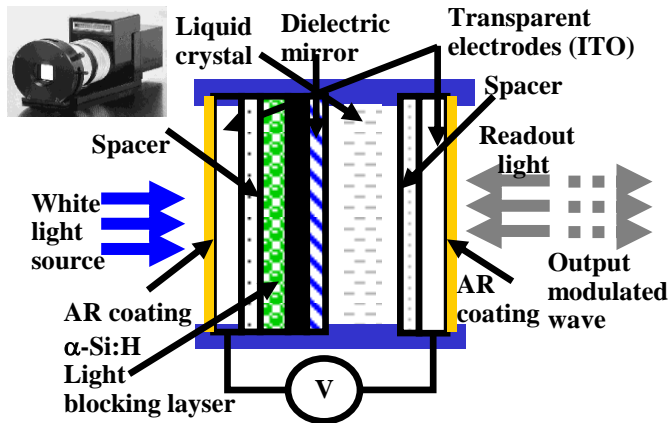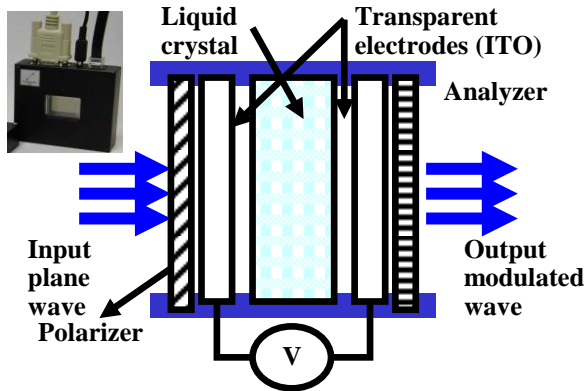

Comparison of specifications of the phase-type SLMs

| | PPM X-8267 | LC2002 |
|------------------|---------------------------|--------------------------|
| Manufacturer | Hamamatsu | HoloEye |
| Efficiency | Reflection (30%) | Transmission (20%) |
| Active area | 20×20mm | 26.2×20mm |
| Pixels | 1024×768 | 832×624 |
| Pitch | 26×26 μ m | 32×32 μ m |
| Modulation mode | Amplitude, phase | Amplitude, phase |
| Phase modulation | 2 π @ 632.8nm (He:Ne) | 2 π @ 532nm (Nd:YAG) |
| Frame rates | 60Hz, max | 60Hz, max |
| Contrast ratio | 200:1 | 200:1 |
| Modulation curve | | |




Phase-Type Spatial Light Modulators

Operation spec. of the phase modulator


✓ PPM X-8267 SLM

- PAL-SLM (Parallel Aligned Nematic Liquid Crystal SLM)
- An electrical signal input type LCD
- An optical image transmitting element (FOP or lens)
- A write-in laser(LD, 50mW@690nm)
- Phase modulation depends on readout light wavelength

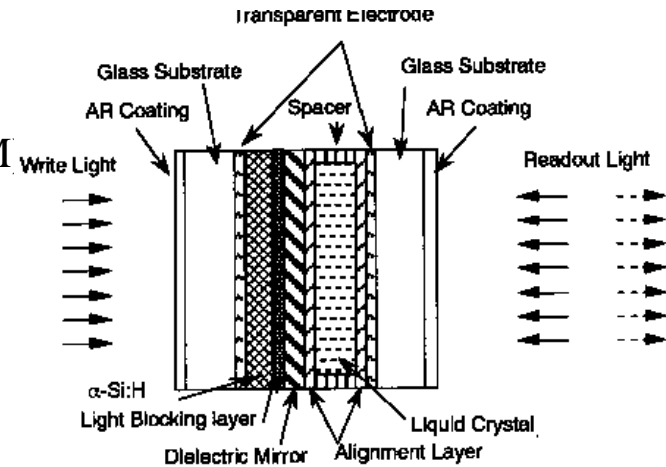

Detailed specifications of the X-8267

| Parameter | X8077 | X8267 | Unit |
|--|--|---|--|
| Features | <ul style="list-style-type: none"> · FOP optical transmitting. · Most compact model. · Compact LD module built-in. · Output image without pixel structure. | <ul style="list-style-type: none"> · More control point with an XGA type LCD. · Compact LD module built-in. · More compact than that the former VGA type model. · Output image without pixel structure. | — |
| Input signal (IBM PC/AT [Windows/DOS]) | VGA | XGA | — |
| Number of control pixels | Approx. 230 000 | Approx. 590 000 | pixels |
| Effective image area | 20 × 20 (Four corners rounded) | | mm |
| Optical image transmitting element | FOP | Lens | — |
| Phase modulation level (readout light wavelength: 633 nm) ^① | 2 π | | radian Min. |
| Maximum display spatial resolution | 12 | 19 | Lp/mm |
| LCD | Display type | | Active matrix monochrome 1.3-inch LCD |
| | Display mode | | Transmission mode, normally-white, TN type |
| | Number of pixels (H × V) | | 644 × 488 1024 × 768 |
| Input voltage | 85 to 132 | | V ac |
| Power consumption | 40 | | VA |
| Dimensions (W × H × D) | 55 × 58.7 × 82.5 | 80 × 93 × 226.3 ^② | mm |
| Weight | Approx. 450 | | g |

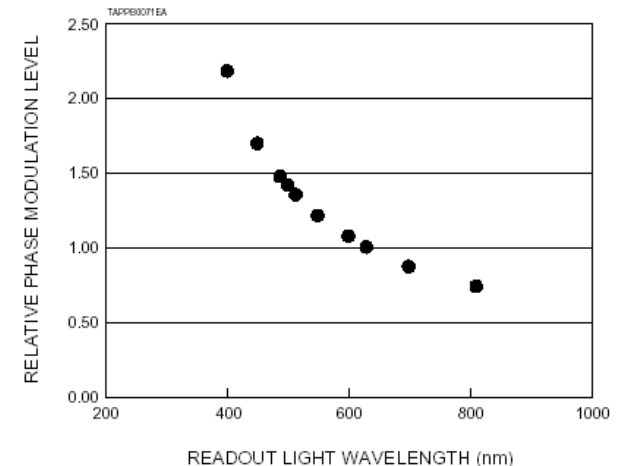

Phase-Type Spatial Light Modulators

☐ Cautions and Test of the phase modulator

✓ Cautions

- The intensity of read light should be kept below 200 mW/cm^2 .
- Be sure to operate at temperature below 40°C , and avoid high humidity
- Only the center of 768×768 pixels is effective
- Transmission: 30%


✓ Test result

- Driving voltage: $\pm 3.0\text{V}$ 1KHz
- Readout light : Laser diode ($\lambda=633\text{nm}$)
- Write light : Laser diode ($\lambda=690\text{nm}$)

| Items | Test results |
|---------------------------------|--|
| Sensitivity of π modulation | $20 \mu\text{W/cm}^2$ |
| Phase modulation | 3.5π radians (write-light intensity : 1 mW/cm^2) |
| Response time | rise < 40 ms |
| | fall < 50ms |
| Spatial resolution | > 46 lp/mm |

Use of Phase-Type SLM







- ❑ Dynamic encoding
 - ✓ Computer-generated holographic stereogram

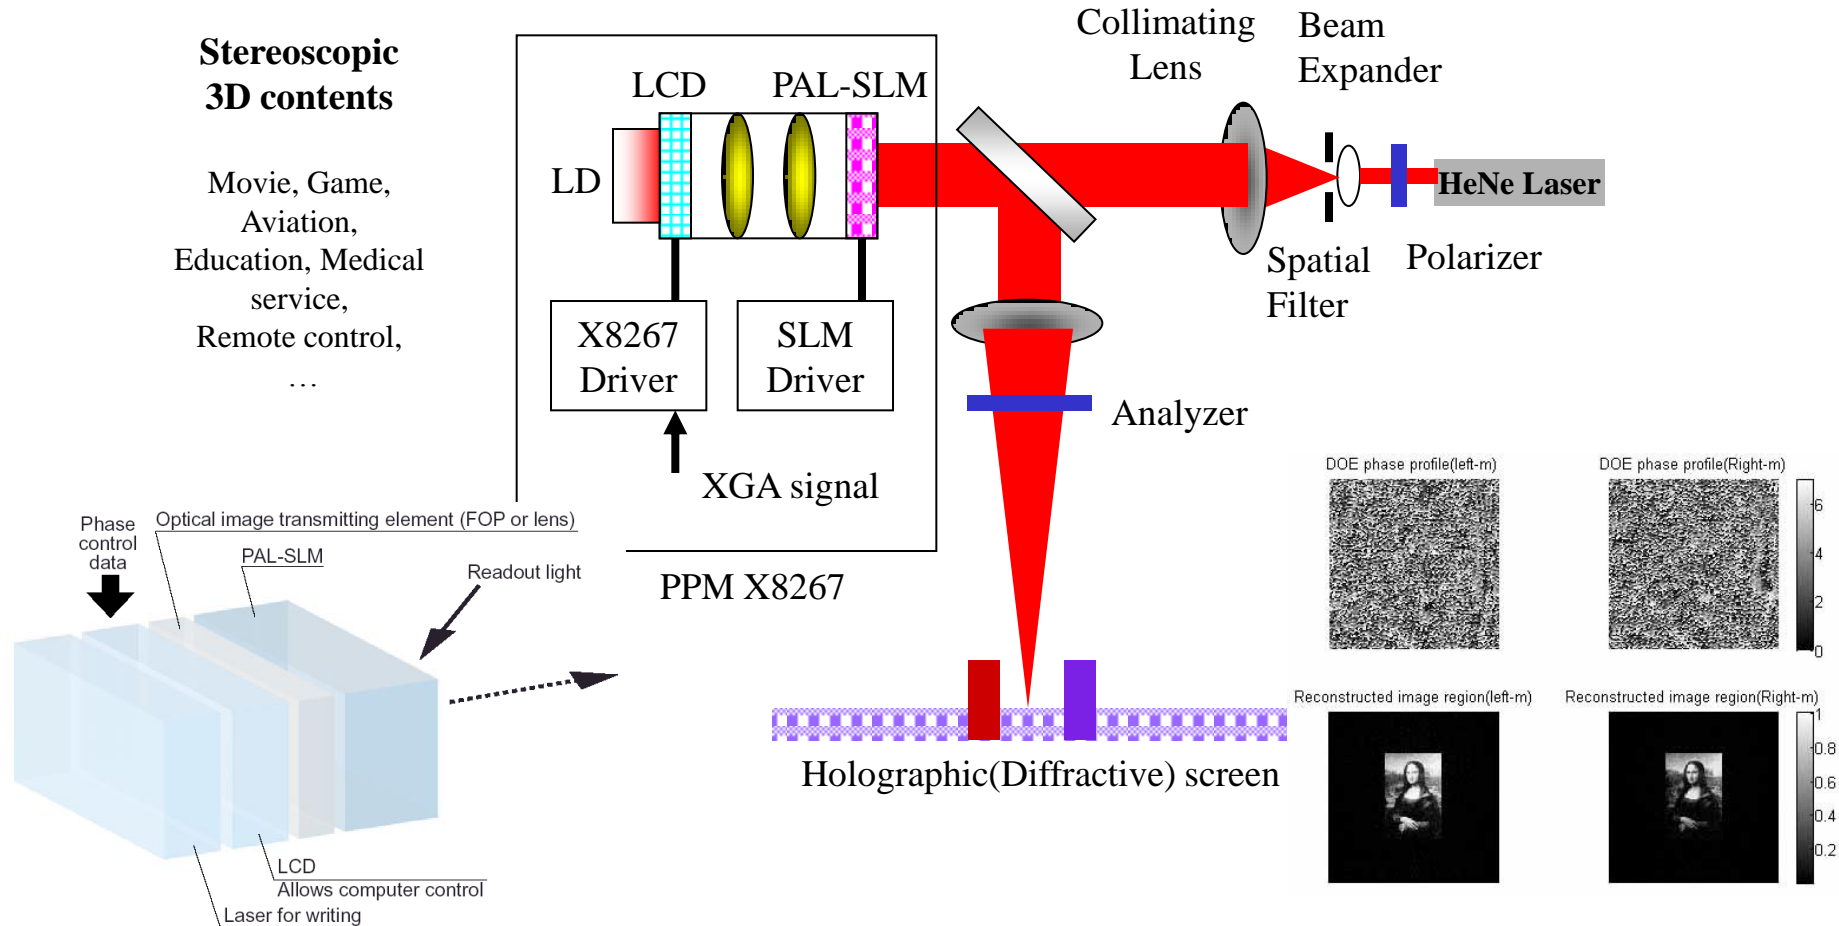

Use of Phase-Type SLM

Dynamic encoding

✓ 2D reconfigurable PSNS: K. Choi and B. Lee, *IEEE PTL* 17, 687 (2005)

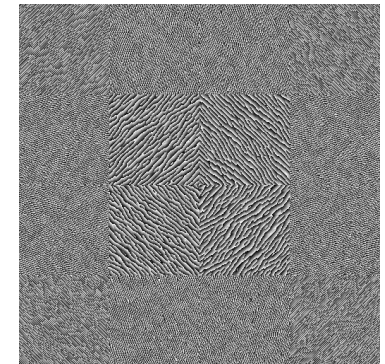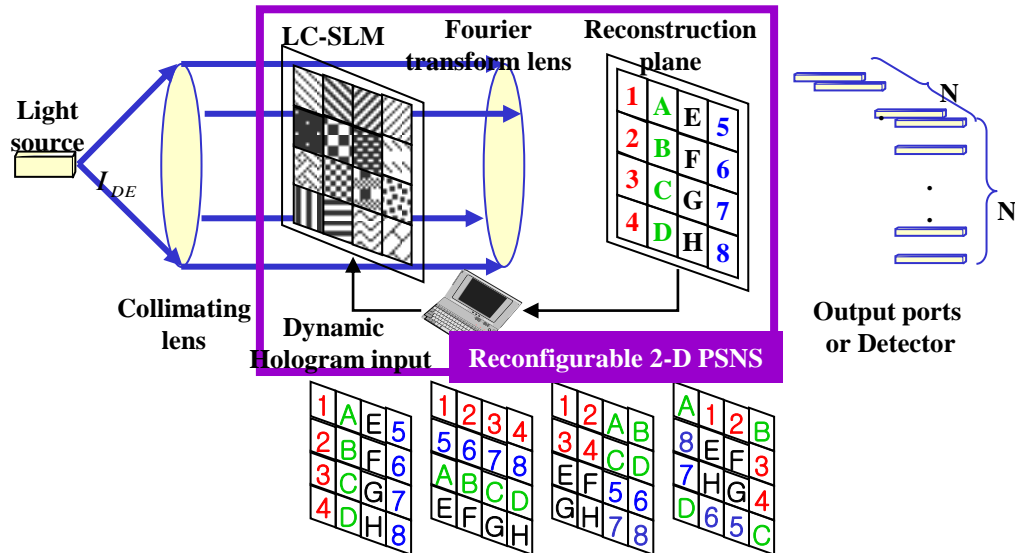


| Performance factors | Phase holograms | | |
|---------------------|----------------------|------------------------------|-------------------|
| | Directional hologram | Hologram for character image | Combined hologram |
| I_{DE} [%] | 98.36 | 88.25 | 86.80 |
| Uniformity [%] | 0.22 | 4.84 | 5.03 |
| RMS error | 0.0167 | 1.2511 | 1.4433 |
| SNR [dB] | 17.79 | 8.76 | 8.18 |




Magneto-Optic Spatial Light Modulator


- Using Faraday rotation

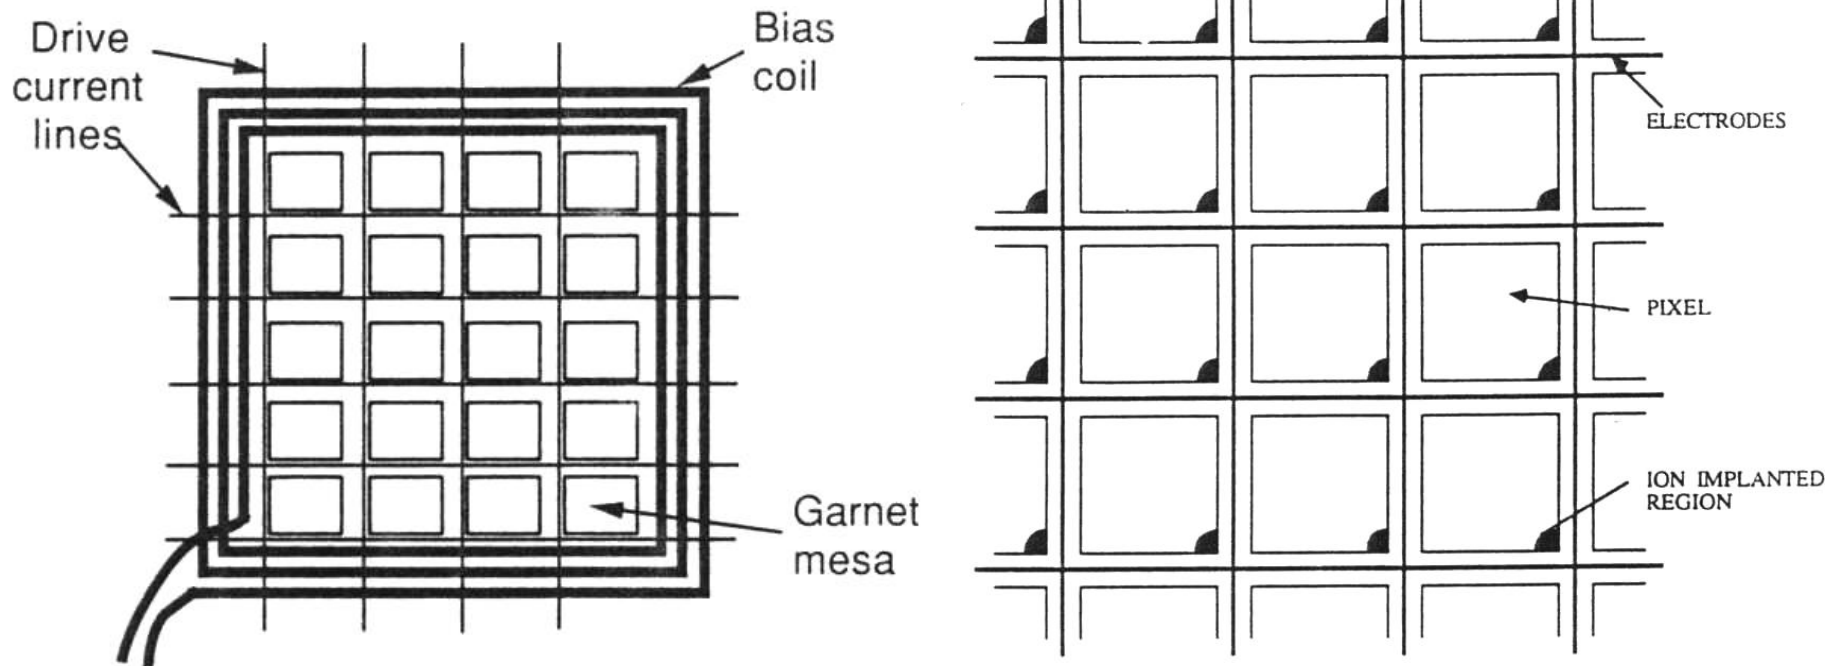


Deformable Mirror SLM

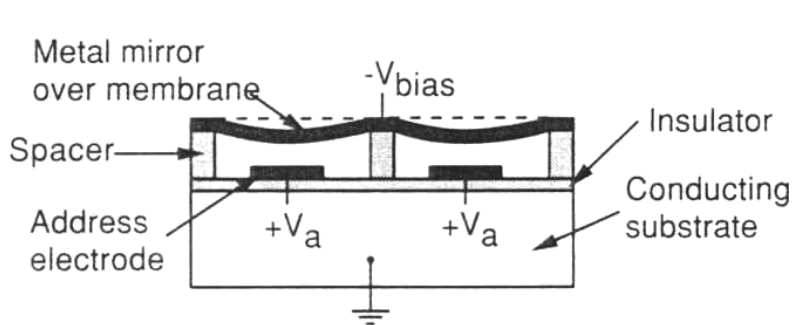


(a)

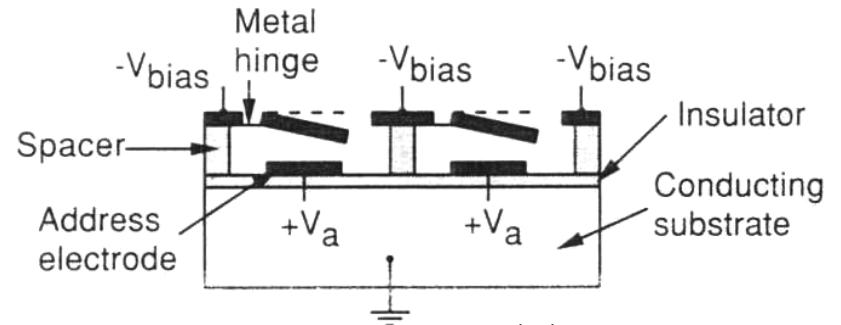

(b)

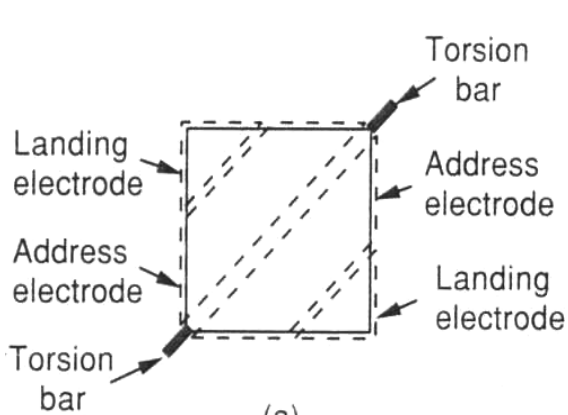

(a)

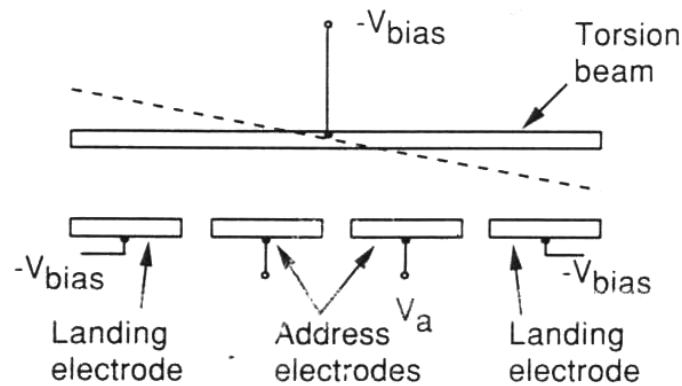

(b)





Lucent Tech.



Multiple Quantum Well SLM

- Self-electro-optic effect device (SEED)
 - Quantum-confined Stark effect (QCSE)

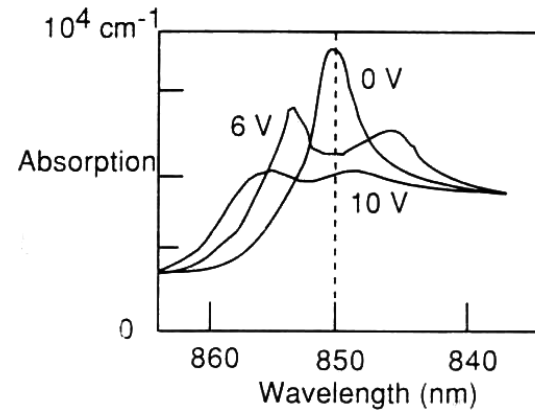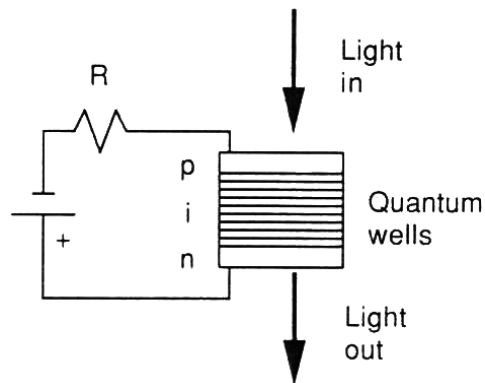

- Symmetric SEED (S-SEED)

