

# Ship Stability

September 2013

Myung-Il Roh

Department of Naval Architecture and Ocean Engineering  
Seoul National University

# Ship Stability



---

- ☑ Ch. 1 Introduction to Ship Stability
- ☑ Ch. 2 Review of Fluid Mechanics
- ☑ Ch. 3 Transverse Stability
- ☑ Ch. 4 Initial Transverse Stability
- ☑ Ch. 5 Free Surface Effect
- ☑ Ch. 6 Inclining Test
- ☑ Ch. 7 Longitudinal Stability
- ☑ Ch. 8 Curves of Stability and Stability Criteria
- ☑ Ch. 9 Numerical Integration Method in Naval Architecture
- ☑ Ch. 10 Hydrostatic Values
- ☑ Ch. 11 Introduction to Damage Stability
- ☑ Ch. 12 Deterministic Damage Stability
- ☑ Ch. 13 Probabilistic Damage Stability (Subdivision and Damage Stability, SDS)

# Ch. 12 Deterministic Damage Stability

# Introduction to Deterministic Damage Stability

# Two Methods to Measure the Ship's Damage Stability

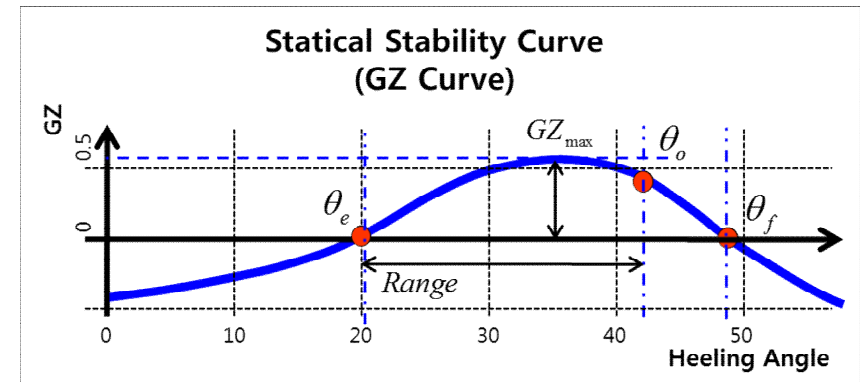
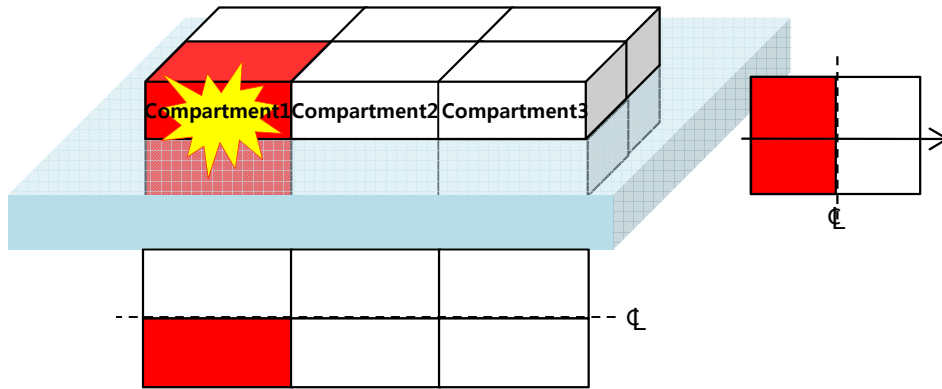


How to measure the ship's stability in a damaged condition?

**Deterministic Method** : Calculation of survivability of a ship based on **the position, stability, and inclination in damaged conditions**

**Probabilistic Method** : Calculation of survivability of a ship based on **the probability of damage**

# Definition of Damage and Flooding

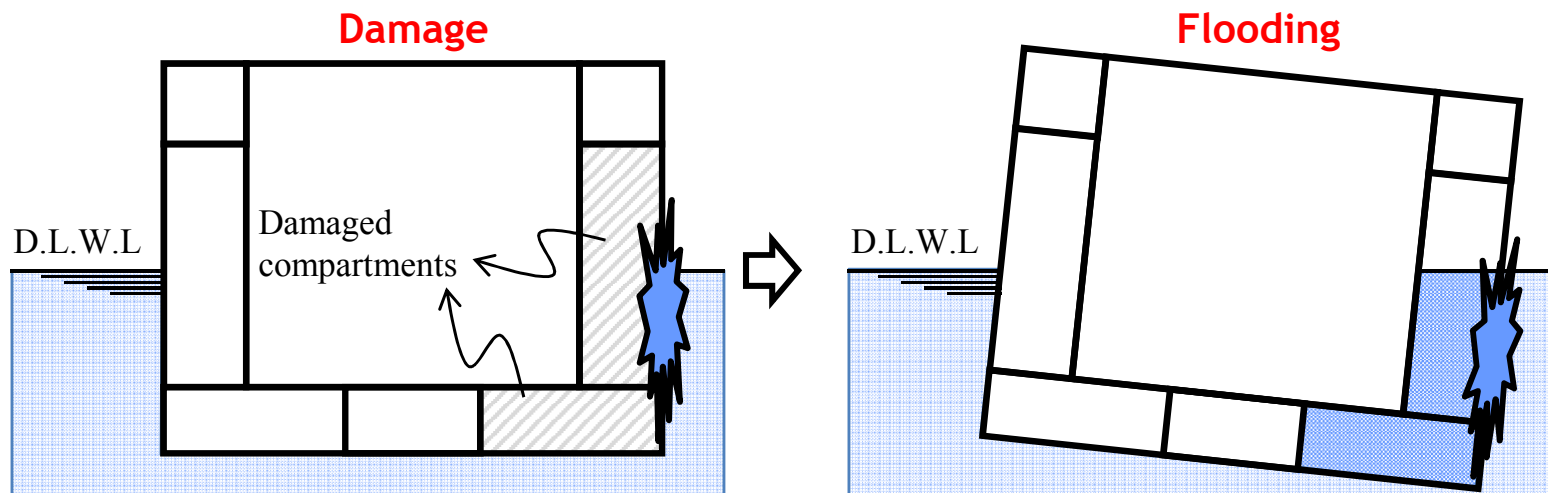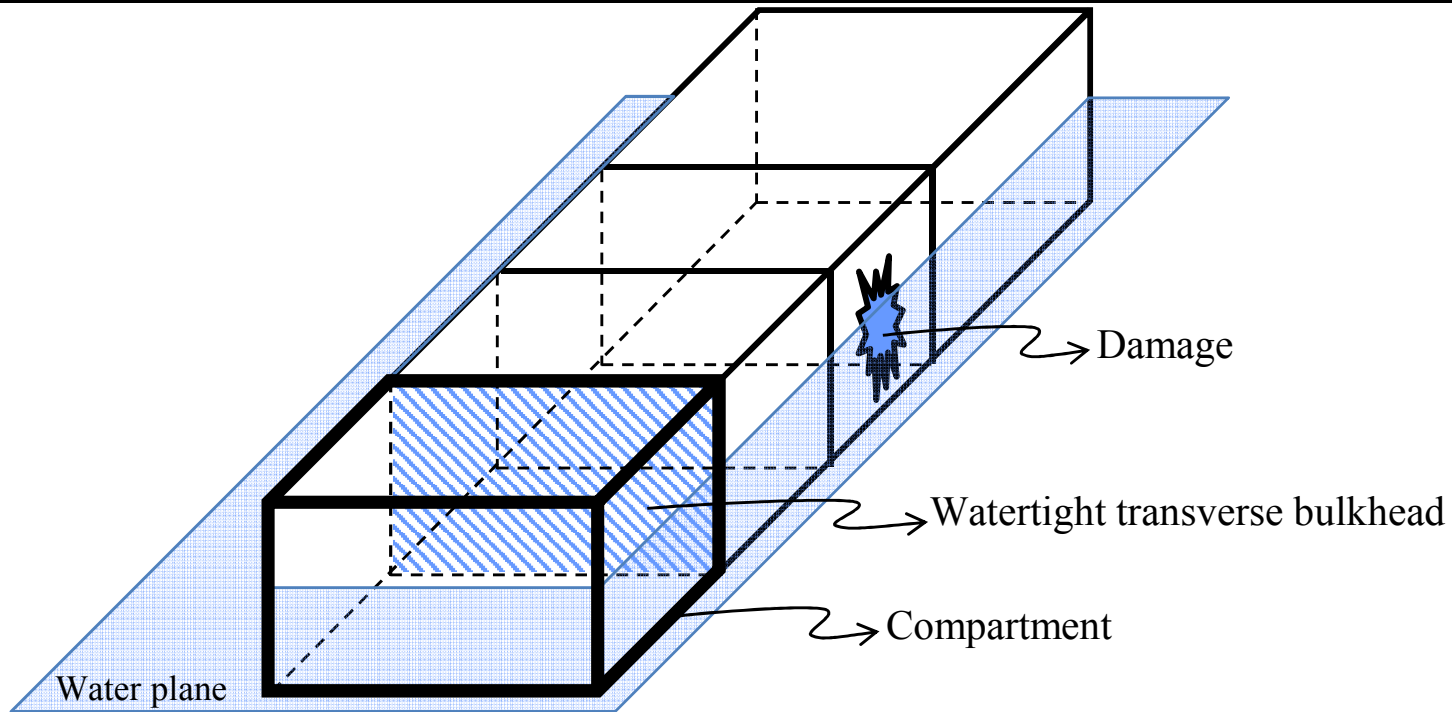

# Procedures of Calculation of Deterministic Damage Stability

---

- ☑ Step 1: Determination of international regulations to be applied according to ship type
- ☑ Step 2: Assumption of the **location of damage** according to ship length
- ☑ Step 3: Assumption of the **extent of damage**
- ☑ Step 4: Assumption of the **permeability** for each compartment
- ☑ Step 5: Evaluation of the required damage stability of international regulations

# Step 1: International Regulations for Damage Stability According to Ship Type

Ship Type	Freeboard Type	Deterministic Damage Stability				Probabilistic Damage Stability
		ICLL <sup>1</sup>	MARPOL <sup>2</sup>	IBC <sup>3</sup>	IGC <sup>4</sup>	SOLAS <sup>5</sup>
Oil Tankers	A <sup>6</sup>	O	O			
	B <sup>7</sup>		O			
Chemical Tankers	A	O		O		
Gas Carriers	B				O	
Bulk Carriers	B					O
	B-60	O				
	B-100	O				
Container Carriers Ro-Ro Ships Passenger Ships	B					O

1: International Convention on Load Lines

2: International Convention for the Prevention of Marine Pollution from Ships

3: International Bulk Chemical Code

4: International Gas Carrier Code

5: Safety Of Life At Sea

6: Freeboard type for a ship which carries liquid cargo (e.g., Tanker). Its freeboard is smaller than that of Type B.

7: Freeboard type for a ship which carries dry cargo (e.g., Container ship, passenger ship).



# Step 2 & 3: Location and Extent of Damage in International Regulations - MARPOL, IBC, IGC

## Location of damage

Regulation	MARPOL	IBC	IGC
Draft	For any operating draft reflecting loading conditions		
Location of Damage in Lengthwise	Anywhere	Lf > 225m	Type 1 <sup>1)</sup> Type 2 <sup>1)</sup> Lf > 150m Type 3 <sup>1)</sup> Lf > 225m Type 3G <sup>2)</sup> Lf ≥ 125m
	Anywhere (Engine room: 1 compartment)	150m < Lf < 225m	Type 2 Lf ≤ 150m Type 3 125m < Lf < 225m
	Anywhere (Engine room: exception)	Lf ≤ 150m	Type 3 Lf < 125m Type 3G

## Extent of damage

Regulation		MARPOL	IBC	IGC		
Extent of Damage	Side Damage	Longitudinal Extent	Lf <sup>2/3</sup> /3 or 14.5m, whichever is the lesser			
		Transverse Extent	B/5 or 11.5m, whichever is the lesser			
		Vertical Extent	No limit			
	Bottom Damage	Longitudinal Extent	FP' ~ 0.3	Lf <sup>2/3</sup> /3 or 14.5m, whichever is the lesser		
			0.3 ~ Aft	Lf <sup>2/3</sup> /3 or 5.0m, whichever is the lesser	Lf/10 or 5.0m, whichever is the lesser	
		Transverse Extent	FP' ~ 0.3	B/6 or 10.0m, whichever is the lesser		
			0.3 ~ Aft	B/6 or 5.0m, whichever is the lesser		
	Vertical Extent		B/15 or 6.0m, whichever is the lesser		B/15 or 2m, whichever is the lesser	
	➔ bottom raking damage <sup>3)</sup> , Reg. 28 of MARPOL 73/78					
	- Longitudinal Extent:		20,000t ≤ DWT ≤ 75,000t	: 0.4 Lf from FP'		
- Transverse Extent:		75,000t ≤ DWT	: 0.6 Lf from FP'			
- Vertical Extent:		20,000t ≤ DWT	: B/3 anywhere			
		20,000t ≤ DWT	: breach of outer hull <sup>4)</sup>			

1) Type 1, Type 2, Type 3: Classification of chemical tanker according to the danger of the loaded cargo. The ship which carries most dangerous cargo is classified into Type 1.

2) Type 1G, Type 2G, Type 2PG, Type 3G: Classification of gas carrier according to the danger of the loaded cargo. The ship which carries most dangerous cargo is classified into Type 1G.

3) The bottom raking damage is only considered in MARPOL

4) The outer shell is only damaged in the vertical direction.

# Step 2 & 3: Location and Extent of Damage in International Regulations - ICLL

## Location of damage

Regulation		ICLL
Draft		Summer load line
Location of damage in lengthwise	Anywhere (Engine room: 1 compartment)	Lf > 150m Ship type A: 1 compartment / B-60: 1 compartment / B-100: 2 compartments
	Anywhere (Engine room: exception)	100m < Lf ≤ 150m ship type B-60: 1 compartment / B-100: 2 compartments

## Extent of damage

Regulation		ICLL	
Extent of Damage	Side Damage	Longitudinal Extent	Type A: 1 compartment Type B-60: 1 compartment Type B-100: 2 compartments
		Transverse Extent	1/5 or 11.5m, whichever is the lesser
		Vertical Extent	No limit

### Damage assumptions

- The vertical extent of damage in all cases is assumed to be from the base line upwards without limit.
- The transverse extent of damage is equal to one-fifth (1/5) or 11.5 m, whichever is the lesser of breadth inboard from the side of the ship perpendicularly to the center line at the level of the summer load water line.
- No main transverse bulkhead is damaged.

# Step 4: Permeability of Compartment (1/2)



When the ship is flooding, how to calculate the actual amount of flooding water?

The compartment of the ship already contains cargo, machinery, liquids, accommodations, or any other equipment or material. To consider this characteristics, the concept of permeability is introduced.

The permeability( $\mu$ ) of a space is **the proportion of the immersed volume of that space which can be occupied by water.**

## Permeability of each general compartment

Spaces	MARPOL	IBC	IGC	ICLL
Appropriated to stores		<b>0.60</b>		<b>0.95</b>
Occupied by accommodation		<b>0.95</b>		<b>0.95</b>
Occupied by machinery		<b>0.85</b>		<b>0.95</b>
Void spaces		<b>0.95</b>		<b>0.95</b>
Intended for liquids		<b>0 to 0.95*</b>		<b>0.95</b>

\* The permeability of partially filled compartments should be consistent with the amount of liquid carried in the compartment.

# Step 4: Permeability of Compartment (2/2)

## Permeability of each cargo compartment

Spaces	Permeability at draft ds	Permeability at draft dp	Permeability at draft dl
Dry cargo spaces	<b>0.70</b>	<b>0.80</b>	<b>0.95</b>
Container cargo spaces	<b>0.70</b>	<b>0.80</b>	<b>0.95</b>
Ro-Ro spaces	<b>0.90</b>	<b>0.90</b>	<b>0.95</b>
Cargo liquids	<b>0.70</b>	<b>0.80</b>	<b>0.95</b>
Timber cargo in holds	<b>0.35</b>	<b>0.70</b>	<b>0.95</b>

---


### Definitions of three draft

Light service draft(dl): the service draft corresponding to the lightest anticipated loading and associated tankage, including, however, such ballast as may be necessary for stability and/or immersion. Passenger ships should include the full complement of passengers and crew on board.

Partial subdivision draft(dp): the light service draft plus 60% of the difference between the light service draft and the deepest subdivision draft.

Deepest subdivision draft(ds): the waterline which corresponds to the summer load line draft of the ship

# Step 5: Evaluation of the Required Damage Stability

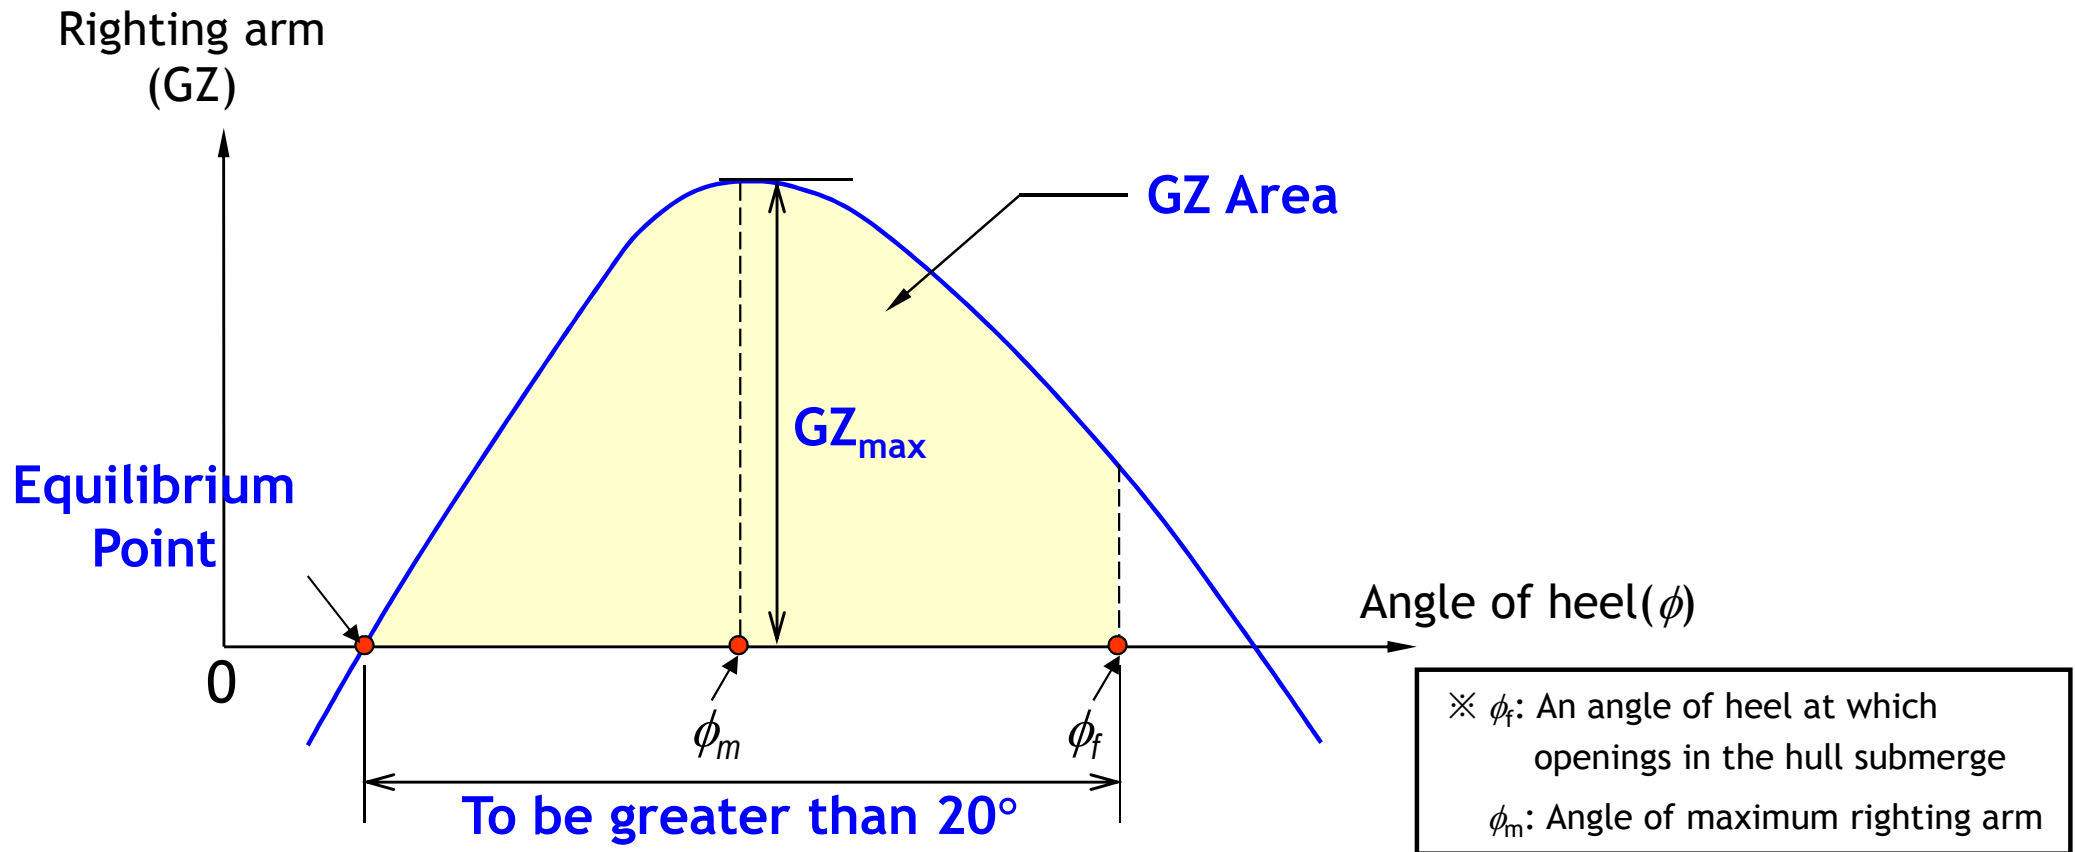


Regulations	MARPOL	IBC	IGC	ICLL
Equilibrium point	Below $25^\circ$ or $30^\circ$		Below $30^\circ$	Below $15^\circ$ or $17^\circ$
Maximum righting arm( $GZ_{max}$ )	Over 0.1 m within the $20^\circ$ range			
Flooding angle( $\phi_f$ )	Over $20^\circ$ from the equilibrium point			
Area under the curve within this range	Over 0.0175 m·rad			

# Step 5: Evaluation of the Required Damage Stability

## - MARPOL Regulation for Damage Stability

MARPOL 1973/78/84 Annex I/25)

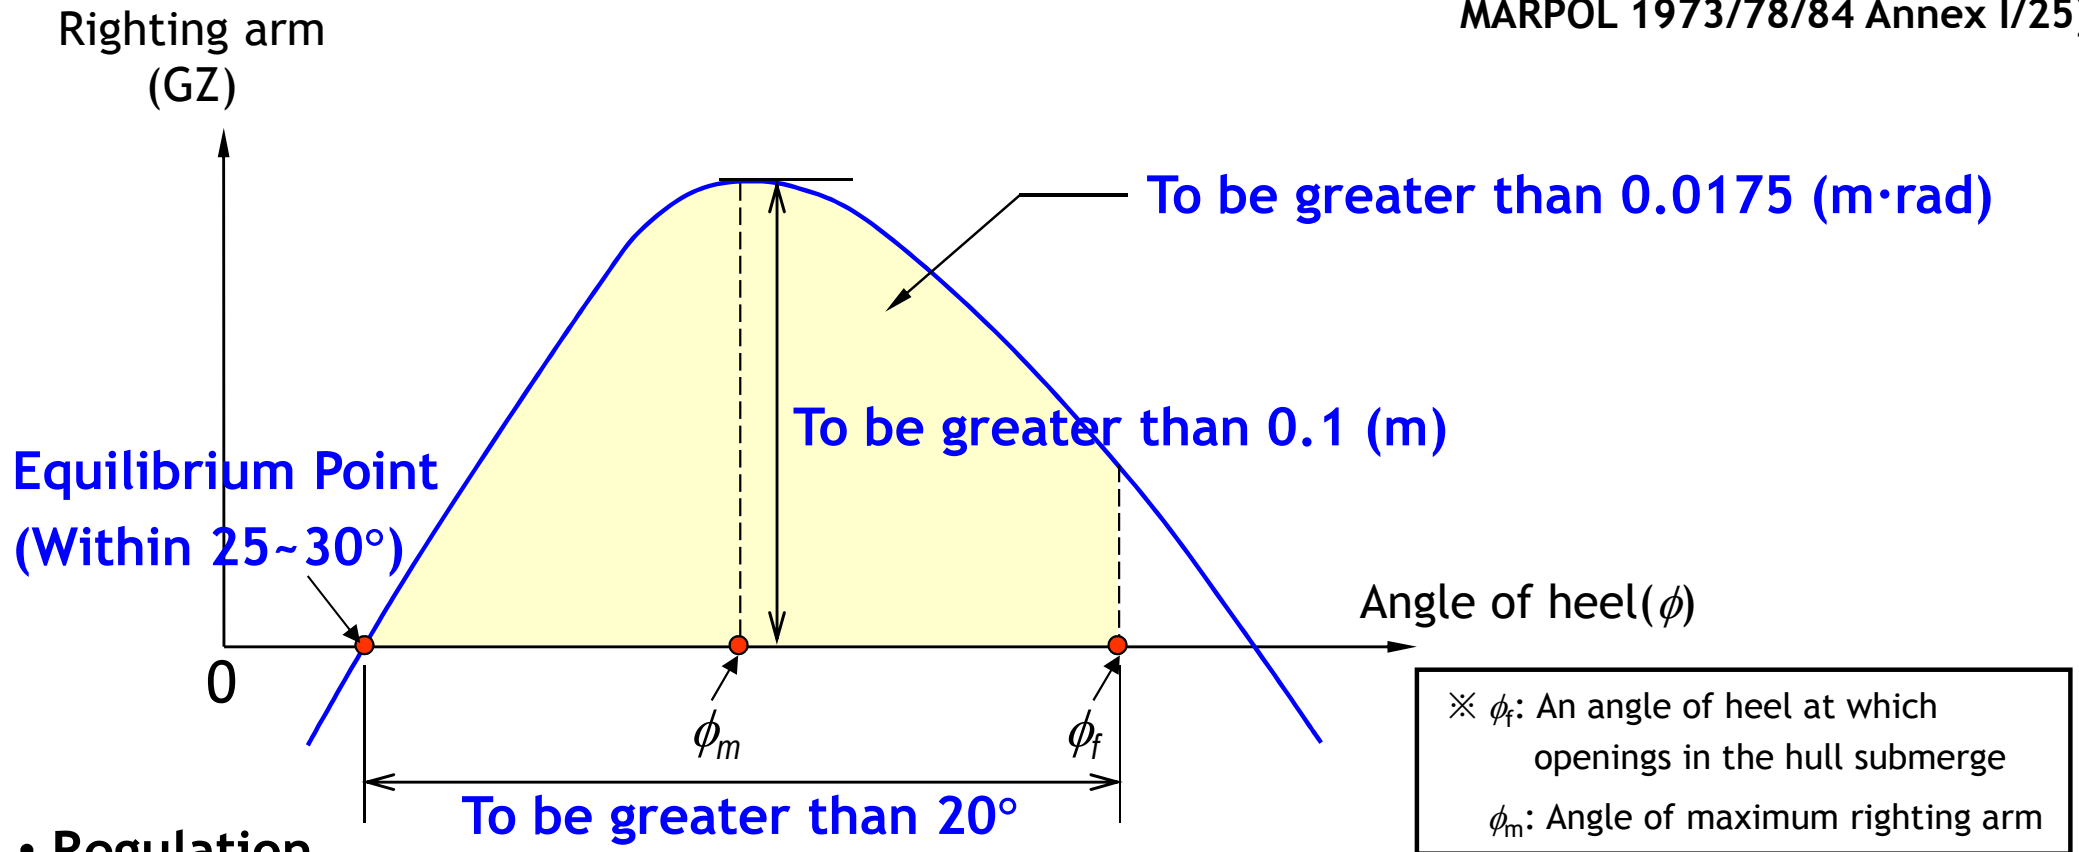

### • Regulation


- The final waterline shall be below the lower edge of any opening through which progressive flooding may take place.
- The angle of heel due to unsymmetrical flooding shall not exceed 25 degrees, provided that this angle may be increased up to 30 degrees if no deck edge immersion occurs.
- The statical stability curve has at least a range of 20 degrees beyond the position of equilibrium in association with a maximum residual righting arm of at least 0.1 meter within the 20 degree range
- The area under the curve within this range shall not be less than 0.0175 meter-radians.

# Step 5: Evaluation of the Required Damage Stability

## - Damage Stability Criteria in Battleship\*

- Regulation

$$\phi_0(\text{Initial Angle of Heel}) \leq 15^\circ, A_2 \geq 1.4 \cdot A_1$$

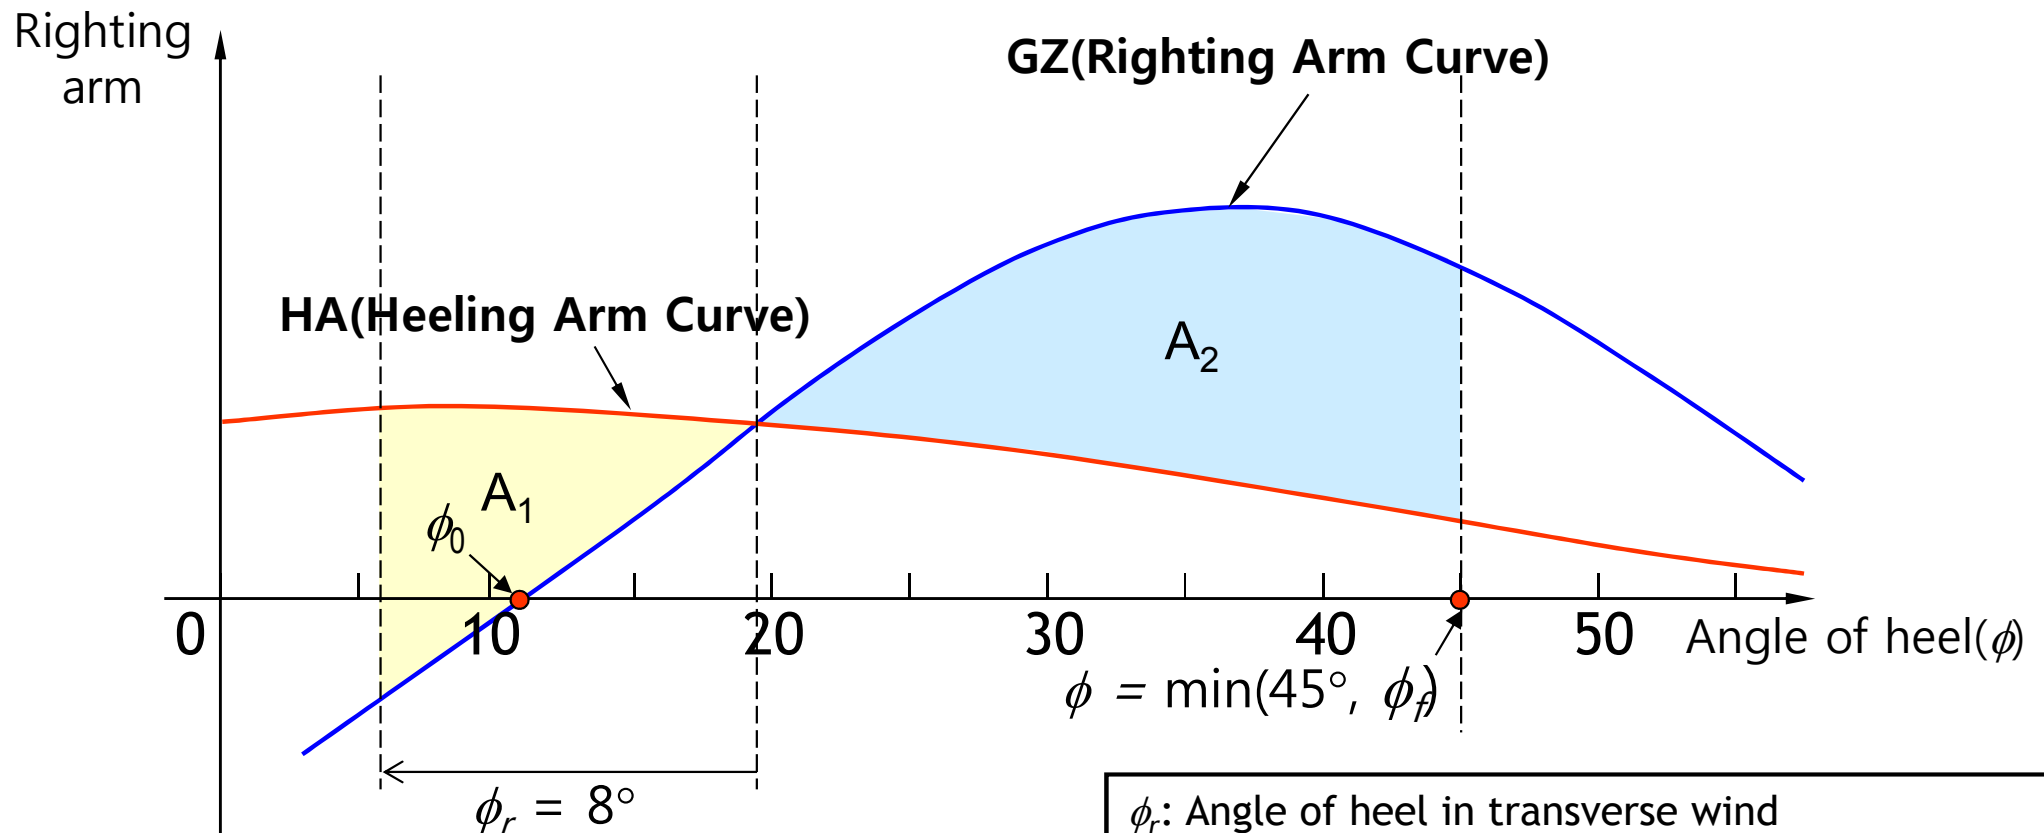

$\phi_r$ : Angle of heel in transverse wind  
 (It varies depending on displacement,  $\phi_r = 8^\circ$  in case of battleship with displacement of 9,000 ton.)  
 $\phi_f$ : An angle of heel at which openings in the hull submerge

\* Surko, S.W., "An Assessment of Current Warship Damaged Stability Criteria", Naval Engineers Journal, 1994


# Example of the Evaluation of Damage Stability According to the Deterministic Method for a Box- Shaped Ship



# Principal Characteristics of the Box-Shaped Ship

## ✓ Principal dimensions

- Ship type: Tanker
- Length B.P: 100m
- Breadth, molded: 40.0m
- Summer draft, molded (Scantling draft): 14.5m
- Deadweight: 50,000ton

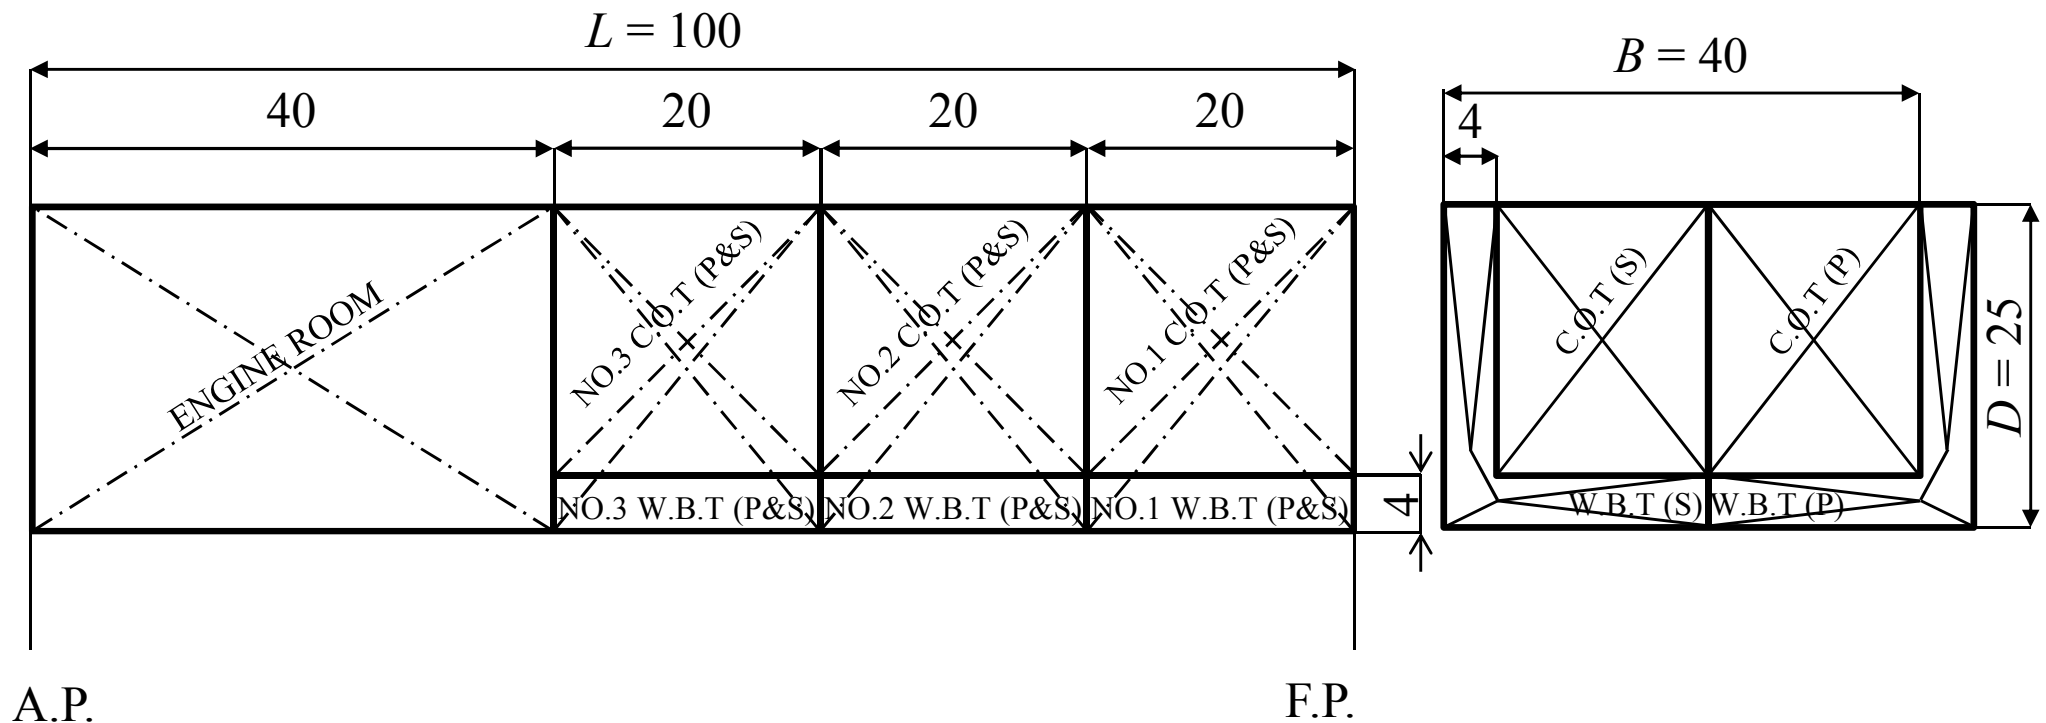

# Applied Rules and Loading Conditions

Ship Type	Freeboard Type	Deterministic Damage Stability				Probabilistic Damage Stability
		ICLL <sup>1</sup>	MARPOL <sup>2</sup>	IBC <sup>3</sup>	IGC <sup>4</sup>	SOLAS <sup>5</sup>
Oil Tankers	A	o	o			
	B		o			
Chemical Tankers	A	o		o		
	B				o	
Bulk Carriers	B-60	o				o
	B-100	o				
Container Carriers Ro-Ro Ships Passenger Ships	B					o

☑ International rules to be applied: MARPOL

☑ Loading conditions to be calculated

- All loading conditions should be evaluated.
- Here, we will evaluate the damage stability for the **homogeneous scantling draft condition** only.

## Hydrostatic values for the homogeneous scantling draft condition

Condition	Displacement	Draft	Trim	GoM	KGo
Homo. Scant. Draft (S.G.=0.810)	59,450	14.5	0.0	7.47	8.98

# Step 1: International Regulations for Damage Stability According to Ship Type

Ship Type	Freeboard Type	Deterministic Damage Stability				Probabilistic Damage Stability
		ICLL <sup>1</sup>	MARPOL <sup>2</sup>	IBC <sup>3</sup>	IGC <sup>4</sup>	SOLAS <sup>5</sup>
Oil Tankers	A <sup>6</sup>	O	O			
	B <sup>7</sup>		O			
Chemical Tankers	A	O		O		
Gas Carriers	B				O	
Bulk Carriers	B					O
	B-60	O				
	B-100	O				
Container Carriers Ro-Ro Ships Passenger Ships	B					O

1: International Convention on Load Lines

2: International Convention for the Prevention of Marine Pollution from Ships

3: International Bulk Chemical Code

4: International Gas Carrier Code

5: Safety Of Life At Sea

6: Freeboard type for a ship which carries liquid cargo (e.g., Tanker). Its freeboard is smaller than that of Type B.

7: Freeboard type for a ship which carries dry cargo (e.g., Container ship, passenger ship).

# Step 2 & 3: Location and Extent of Damage in International Regulations

## - MARPOL, IBC, IGC

### Location of damage

Regulation		MARPOL	IBC	IGC
Draft		For any operating draft reflecting loading conditions		
Location of Damage in Lengthwise	Anywhere	Lf > 225m	Type 1 <sup>1)</sup> Type 2 <sup>1)</sup> Lf > 150m Type 3 <sup>1)</sup> Lf > 225m	Type 1G <sup>2)</sup> Type 2PG <sup>2)</sup> Type 2G <sup>2)</sup> Lf > 150m Type 3G <sup>2)</sup> Lf ≥ 125m
	Anywhere (Engine room: 1 compartment)	150m < Lf < 225m	Type 2 ≤ 150m Type 3 125m < Lf < 225m	Type 2G Lf ≤ 150m
	Anywhere (Engine room: exception)	Lf ≤ 150m	Type 3 Lf < 125m	Lf < 125m Type 3G

### Extent of damage

Regulation		MARPOL	IBC	IGC	
Extent of Damage	Side Damage	Longitudinal Extent	Lf <sup>2/3</sup> /3 or 14.5m, whichever is the lesser		
		Transverse Extent	B/5 or 11.5m, whichever is the lesser		
		Vertical Extent	No limit		
	Bottom Damage	Longitudinal Extent	FP' ~ 0.3Lf	Lf <sup>2/3</sup> /3 or 14.5m, whichever is the lesser	
			0.3Lf ~ Aft	Lf <sup>2/3</sup> /3 or 5.0m, whichever is the lesser	Lf/10 or 5.0m, whichever is the lesser
		Transverse Extent	FP' ~ 0.3Lf	B/6 or 10.0m, whichever is the lesser	
			0.3Lf ~ Aft	B/6 or 5.0m, whichever is the lesser	
		Vertical Extent	B/15 or 6.0m, whichever is the lesser		B/15 or 2m, whichever is the lesser
➔ bottom raking damage <sup>3)</sup> , Reg. 28 of MARPOL 73/78					
		20,000t ≤ DWT ≤ 75,000t	: 0.4 Lf from FP'		
	- Longitudinal Extent:	75,000t ≤ DWT	: 0.6 Lf from FP'		
	- Transverse Extent:	20,000t ≤ DWT	: B/3 anywhere		
	- Vertical Extent:	20,000t ≤ DWT	: breach of outer hull <sup>4)</sup>		

- 1) Type 1, Type 2, Type 3: Classification of chemical tanker according to the danger of the loaded cargo. The ship which carries most dangerous cargo is classified into Type 1.
- 2) Type 1G, Type 2G, Type 2PG, Type 3G: Classification of gas carrier according to the danger of the loaded cargo. The ship which carries most dangerous cargo is classified into Type 1G.
- 3) The bottom raking damage is only considered in MARPOL
- 4) The outer shell is only damaged in the vertical direction.


# Step 2 & 3: Location and Extent of Damage in International Regulations

## - Case 1: Side Damage

### Assumption of Extent of Damage (Side Damage)

Regulation		MARPOL	IBC	IGC
Side Damage	Longitudinal Extent	$Lf^{2/3}/3$ or 14.5m, whichever is the lesser		
	Transverse Extent	$B/5$ or 11.5m, whichever is the lesser		
	Vertical Extent		No limit	
Extent of Damage	Bottom Damage	FP' ~ 0.3Lf	$Lf^{2/3}/3$ or 14.5m, whichever is the lesser	
		0.3Lf ~ Aft	$Lf^{2/3}/3$ or 5.0m, whichever is the lesser	$Lf/10$ or 5.0m, whichever is the lesser
	Transverse Extent	FP' ~ 0.3Lf	$B/6$ or 10.0m, whichever is the lesser	
		0.3Lf ~ Aft	$B/6$ or 5.0m, whichever is the lesser	
Vertical Extent	$B/15$ or 6.0m, whichever is the lesser		$B/15$ or 2m, whichever is the lesser	


→ bottom raking damage<sup>3)</sup>, Reg. 28 of MARPOL 73/78  
 - Longitudinal Extent:  $20,000t \leq DWT \leq 75,000t$  : 0.4 Lf from FP'  
 - Transverse Extent:  $75,000t \leq DWT$  : 0.6 Lf from FP'  
 - Vertical Extent:  $20,000t \leq DWT$  : B/3 any  
 : 20,000t ≤ DWT : breach c



Regulation	MARPOL	
Extent of Side Damage	Requirements	Calculation results
Longitudinal Extent	$Lf^{2/3}/3$ or 14.5m, whichever is the lesser	<b>7.182m</b>
Transverse Extent	$B/5$ or 11.5m, whichever is the lesser	<b>8.0m</b>
Vertical Extent	No limit (Infinite from baseline)	<b>No limit (Infinite from baseline)</b>

# Step 2 & 3: Location and Extent of Damage in International Regulations

## - Case 1: Side Damage

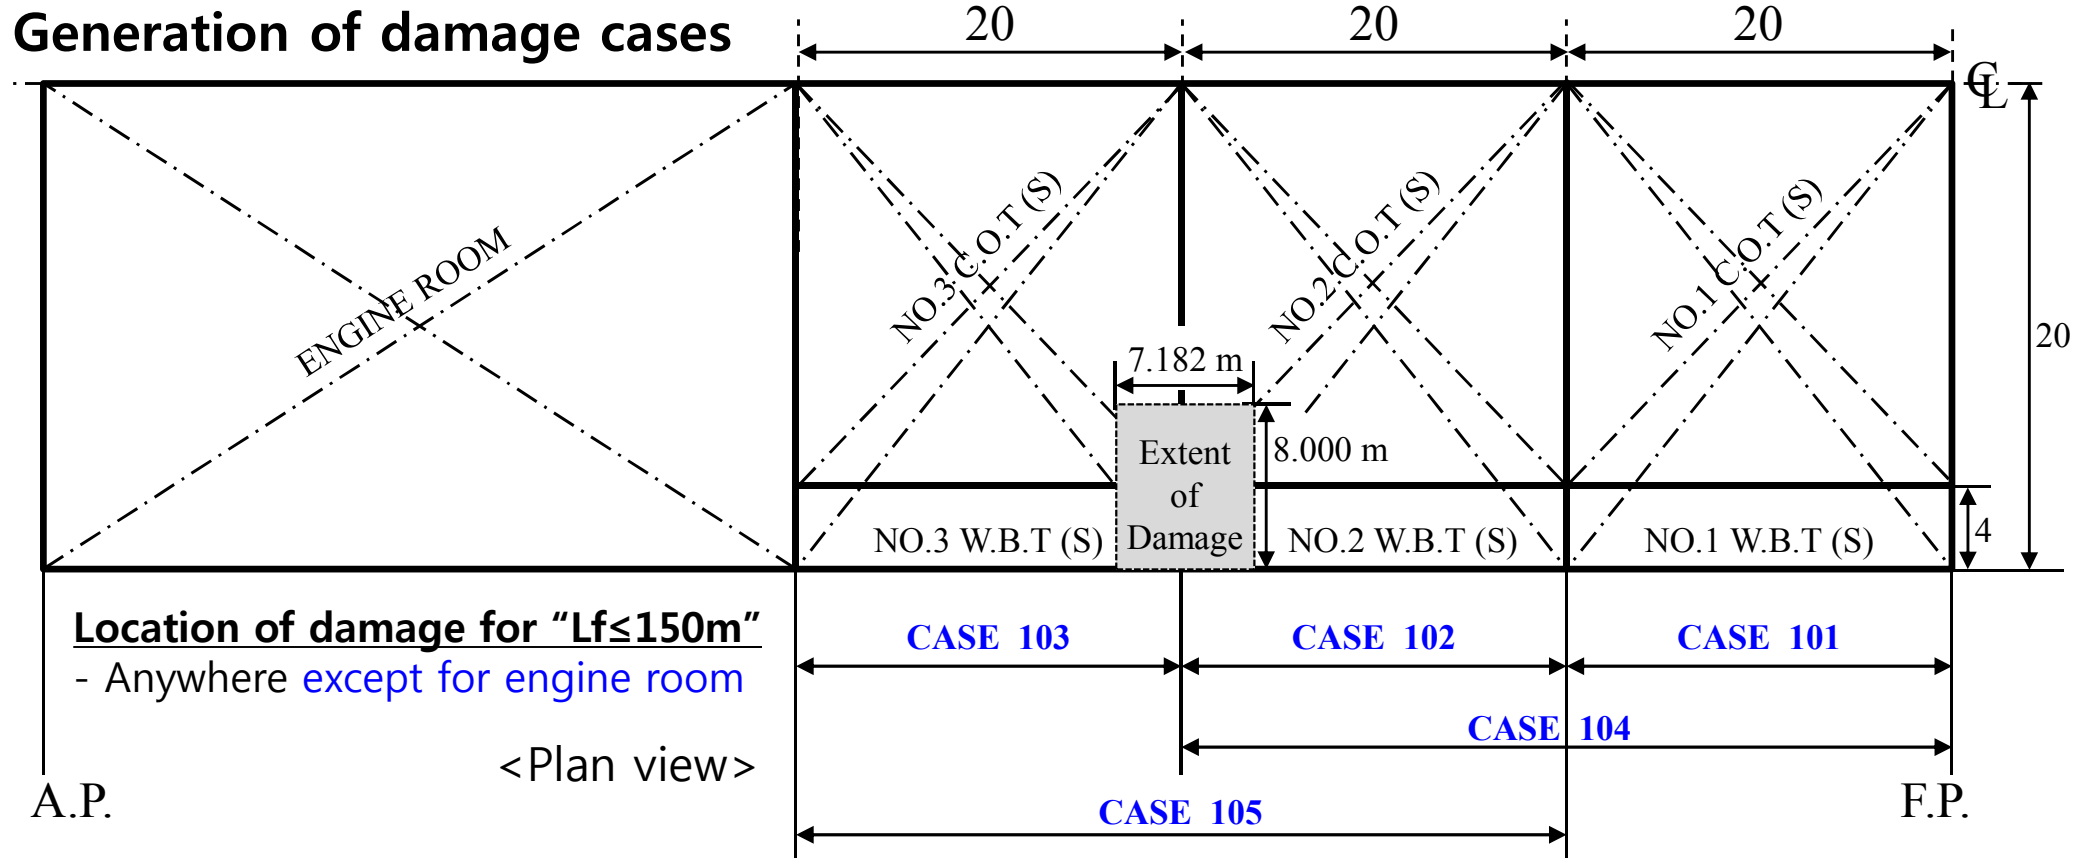

Damage Case	No. 1 C.O.T(S)	No. 1 W.B.T(S)	No. 2 C.O.T(S)	No. 2 W.B.T(S)	No. 3 C.O.T(S)	No. 3 W.B.T(S)
101	Damaged	Damaged				
102			Damaged	Damaged		
103					Damaged	Damaged
104	Damaged	Damaged	Damaged	Damaged		
105			Damaged	Damaged	Damaged	Damaged

# Step 4: Permeability of Compartment - Case 1: Side Damage

Spaces	MARPOL	IBC	IGC	ICLL
Appropriated to stores		0.60		0.95
Occupied by accommodation		0.95		0.95
Occupied by machinery		0.85		0.95
Void spaces		0.95		0.95
Intended for liquids		0 to 0.95*		0.95

## All damage cases for side damage

Damage Case	No. 1 C.O.T(S)	No. 1 W.B.T(S)	No. 2 C.O.T(S)	No. 2 W.B.T(S)	No. 3 C.O.T(S)	No. 3 W.B.T(S)
101	Damaged	Damaged				
102			Damaged	Damaged		
103					Damaged	Damaged
104	Damaged	Damaged	Damaged	Damaged		
105			Damaged	Damaged	Damaged	Damaged

## Information on the damaged compartments of the damage case "101"

	Permeability	Volume	XG (From AP)	YG (From Centerline)	ZG (From Baseline)
No. 1 C.O.T(S)	0.95	3,373.0	90.0	8.0	14.5
No. 1 W.B.T(S)	0.95	2,388.0	90.0	13.0	5.0

# Step 5: Evaluation of the Required Damage Stability

## - Case 1: Side Damage

### Evaluation results for the damage case "101" according to MARPOL

Regulations	Requirements	Calculation results	Satisfaction
Equilibrium point	Below 25° or 30°	1.878°	O
Maximum righting arm( $GZ_{max}$ )	Over 0.1 m within the 20° range	2.652 m	O
Flooding angle( $\phi_f$ )	Over 20° from the equilibrium point	24.475°	O
Area under the curve within this range	Over 0.0175 m·rad	0.446 m·rad	O




# Step 2 & 3: Location and Extent of Damage in International Regulations

## - Case 2: Bottom Damage

### Assumption of Extent of Damage (Bottom Damage)


Regulation		MARPOL	IBC	IGC
Side Damage	Longitudinal Extent	L <sup>2/3</sup> /3 or 14.5m, whichever is the lesser		
	Transverse Extent	B/5 or 11.5m, whichever is the lesser		
	Vertical Extent	No limit		
Extent of Damage	Bottom Damage	FP'~0.3Lf	L <sup>2/3</sup> /3 or 14.5m, whichever is the lesser	
		0.3Lf~Aft	L <sup>2/3</sup> /3 or 5.0m, whichever is the lesser	Lf/10 or 5.0m, whichever is the lesser
	Transverse Extent	FP'~0.3Lf	B/6 or 10.0m, whichever is the lesser	
		0.3Lf~Aft	B/6 or 5.0m, whichever is the lesser	
Vertical Extent	B/15 or 6.0m, whichever is the lesser		B/15 or 2m, whichever is the lesser	
→ bottom raking damage <sup>3)</sup> , Reg. 28 of MARPOL 73/78 - Longitudinal Extent: 20,000t ≤ DWT ≤ 75,000t : 0.4 Lf from FP' - Transverse Extent: 75,000t ≤ DWT : 0.6 Lf from FP' - Vertical Extent: 20,000t ≤ DWT : B/3 anywhere : breach of outer hull <sup>4)</sup>				



Regulation	Reg. 25, Annex I of MARPOL 73/78				Reg. 28, Annex I of MARPOL 73/78	
	Bottom damage				Bottom raking damage	
	FP'~0.3Lf		0.3Lf~Aft			
Extent of Damage	Requirements	Calculation results	Requirements	Calculation results	Requirements for DWT ≤ 75,000ton	Calculation results
Longitudinal Extent	L <sup>2/3</sup> /3 or 14.5m, whichever is the lesser	<b>7.182m</b>	L <sup>2/3</sup> /3 or 5.0m, whichever is the lesser	<b>5.0m</b>	0.4 Lf from FP'	<b>40.0m</b>
Transverse Extent	B/6 or 10.0m, whichever is the lesser	<b>6.7m</b>	B/6 or 5.0m, whichever is the lesser	<b>5.0m</b>	B/3 anywhere	<b>13.0m</b>
Vertical Extent	B/15 or 6.0m, whichever is the lesser	<b>2.7m</b>	B/15 or 6.0m, whichever is the lesser	<b>2.7m</b>	breach of outer hull	<b>breach of outer hull</b>


# Step 2 & 3: Location and Extent of Damage in International Regulations

## - Case 2: Bottom Damage

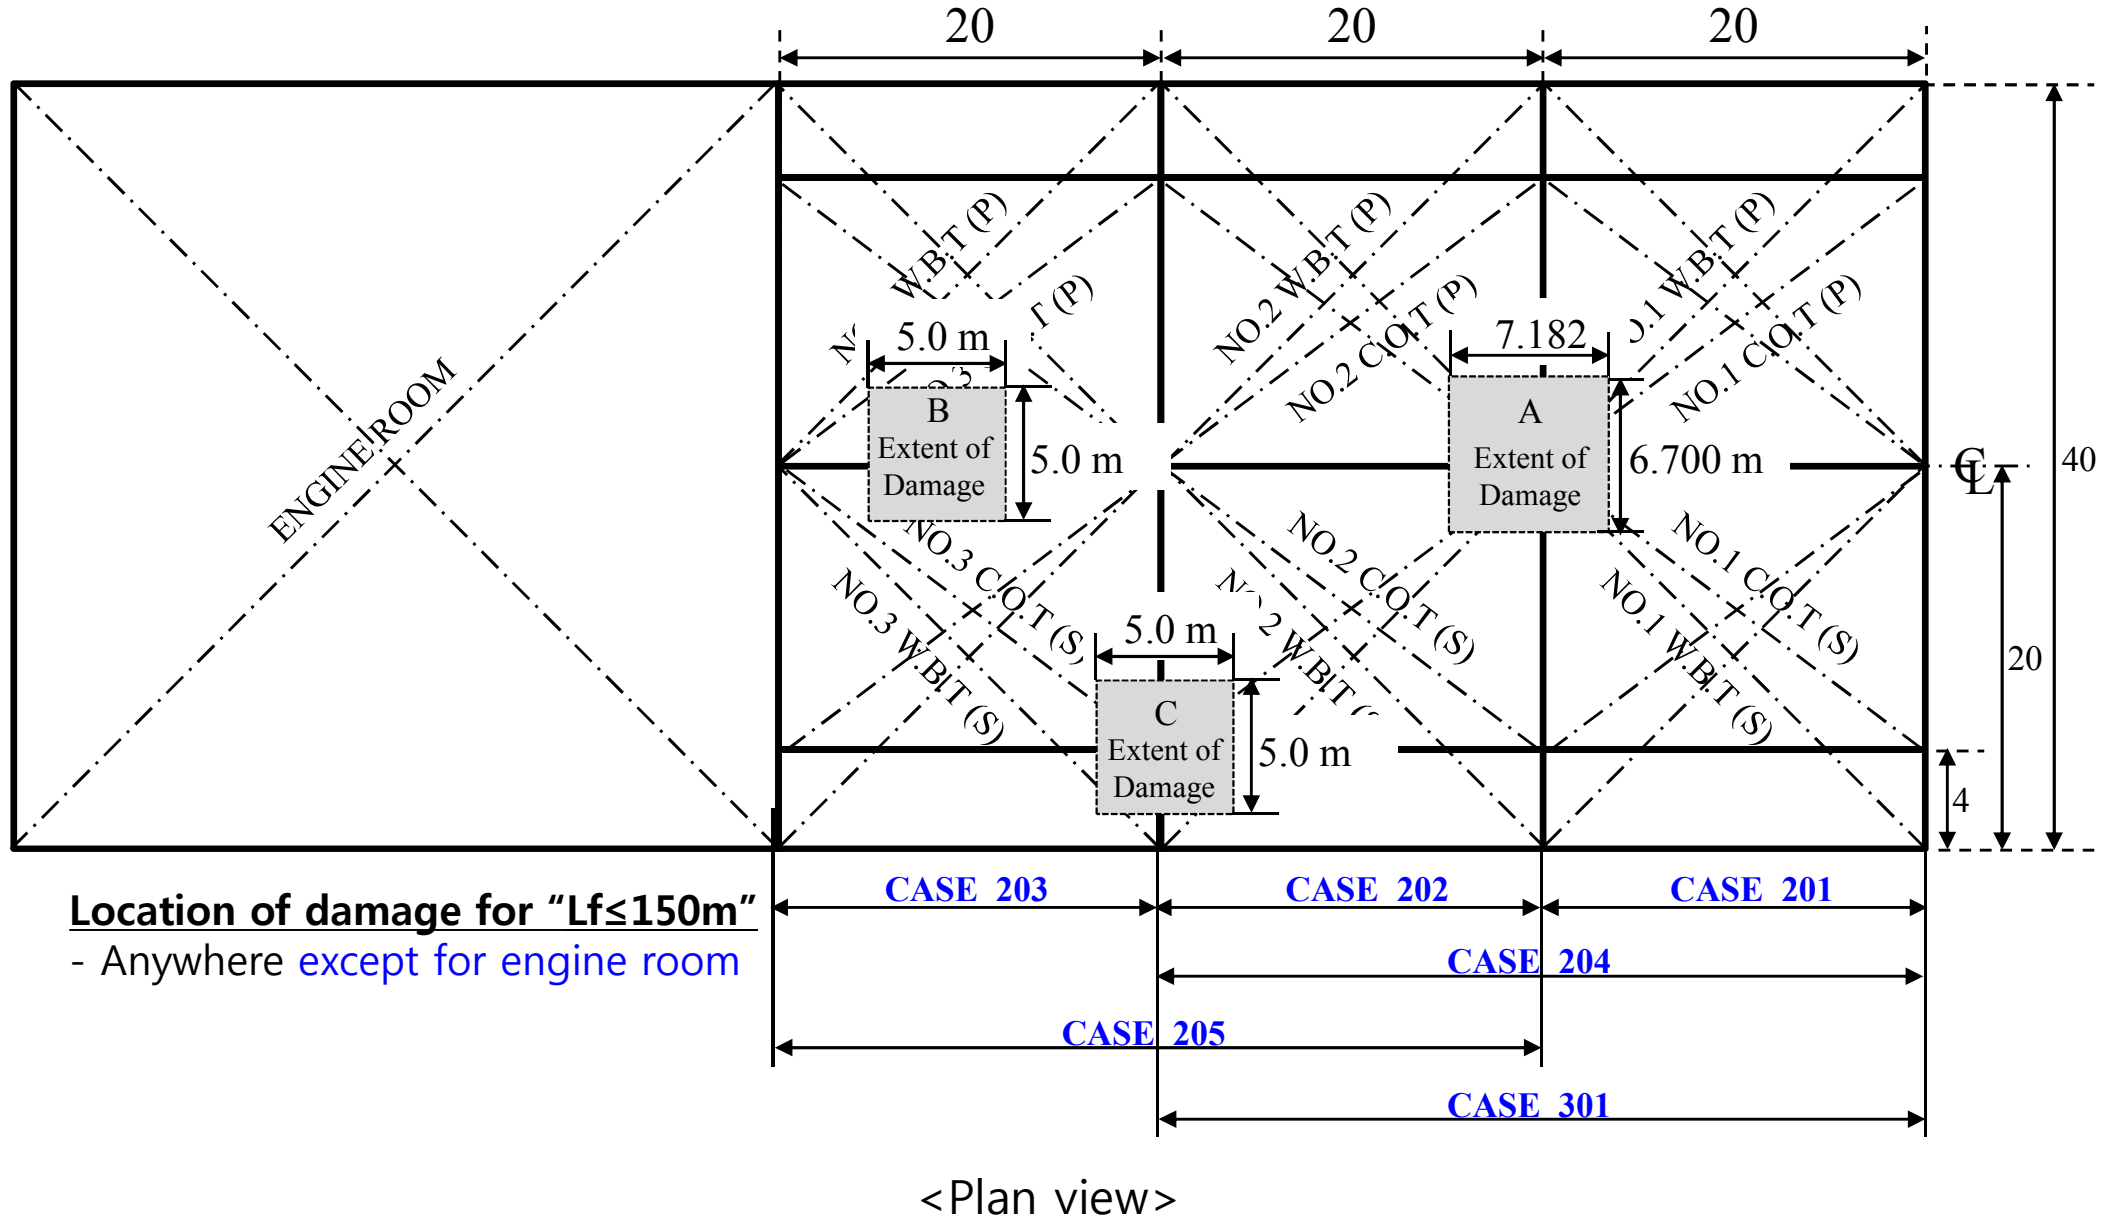

# Step 2 & 3: Location and Extent of Damage in International Regulations

## - Case 2: Bottom Damage

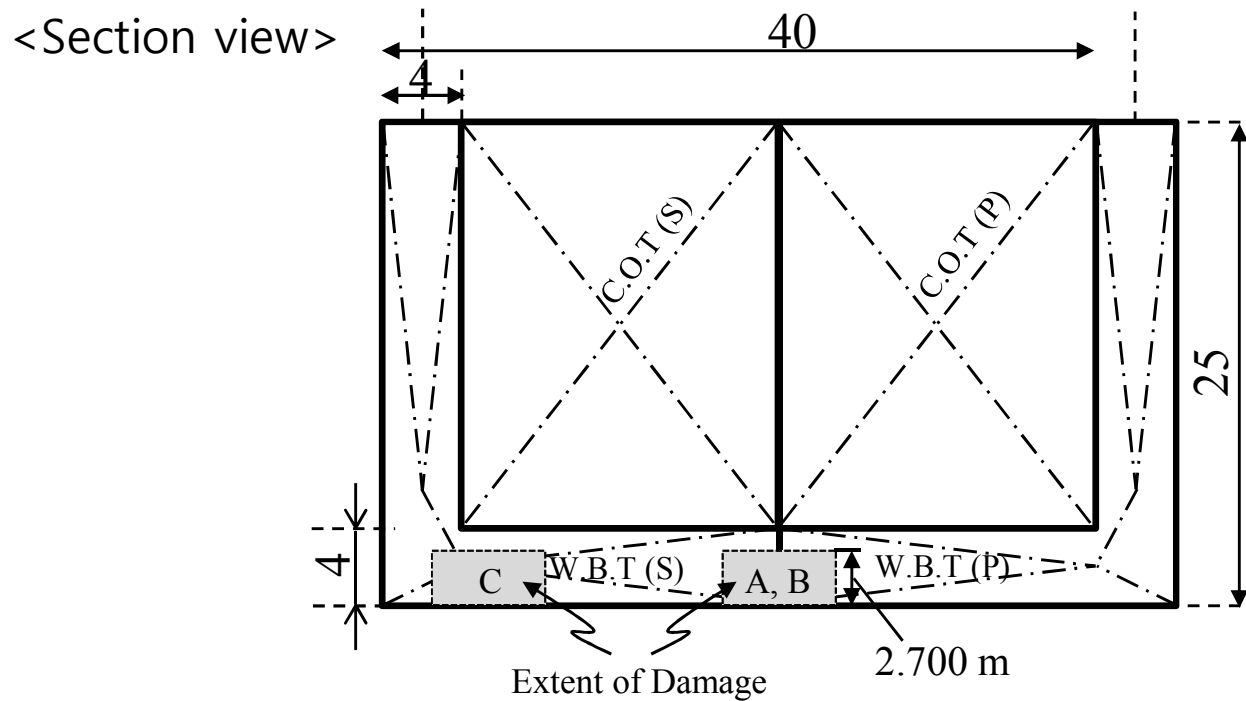

Damage Case	No. 1 W.B.T(S)	No. 1 W.B.T(P)	No. 2 W.B.T(S)	No. 2 W.B.T(P)	No. 3 W.B.T(S)	No. 3 W.B.T(P)
201	Damaged	Damaged				
202			Damaged	Damaged		
203					Damaged	Damaged
204	Damaged	Damaged	Damaged	Damaged		
205			Damaged	Damaged	Damaged	Damaged
206	Damaged					
207			Damaged			
208					Damaged	
209	Damaged		Damaged			
210			Damaged		Damaged	
301 (bottom raking damage)	Damaged	Damaged	Damaged	Damaged		

# Step 4: Permeability of Compartment - Case 2: Bottom Damage

Spaces	MARPOL	IBC	IGC	ICLL
Appropriated to stores		0.60		0.95
Occupied by accommodation		0.95		0.95
Occupied by machinery		0.85		0.95
Void spaces		0.95		0.95
Intended for liquids		0 to 0.95*		0.95

## All damage cases for bottom damage

Damage Case	No. 1 W.B.T(S)	No. 1 W.B.T(P)	No. 2 W.B.T(S)	No. 2 W.B.T(P)	No. 3 W.B.T(S)	No. 3 W.B.T(P)
201	Damaged	Damaged				
202			Damaged	Damaged		
203					Damaged	Damaged
204	Damaged	Damaged	Damaged	Damaged		
205			Damaged	Damaged	Damaged	Damaged
206	Damaged					
207			Damaged			
208					Damaged	
209	Damaged		Damaged			
210			Damaged		Damaged	
301 (bottom raking damage)	Damaged	Damaged	Damaged	Damaged		

## Information on the damaged compartments of the damage case "201"

	Permeability	Volume	XG (From AP)	YG (From Centerline)	ZG (From Baseline)
No. 1 W.B.T(P)	0.95	2,388.0	90.0	-13.0	5.0
No. 1 W.B.T(S)	0.95	2,388.0	90.0	13.0	5.0

# Step 5: Evaluation of the Required Damage Stability

## - Case 2: Bottom Damage

### Evaluation results for the damage case "201" according to MARPOL

Regulations	Requirements	Calculation results	Satisfaction
Equilibrium point	Below 25° or 30°	?	O or X ?
Maximum righting arm( $GZ_{max}$ )	Over 0.1 m within the 20° range	?	O or X ?
Flooding angle( $\phi_f$ )	Over 20° from the equilibrium point	?	O or X ?
Area under the curve within this range	Over 0.0175 m·rad	?	O or X ?

# Reference Slides

# [Appendix] Assumptions for Damage Stability

MARPOL 1973/78/84 Annex I/25

It must be remembered that the resulting (virtual) displacement not only differ from the initial displacement, but varies with change in trim or heel.



SOLAS 2006 Amend / Chapter II-1 / Reg. 7

3 When determining the positive righting lever (GZ) of the residual stability curve, the displacement used should be that of the intact condition. That is, the constant displacement method of calculation should be used.

In constant displacement method, the GZ curve related values are represented so that the displacement of the ship is assumed to be constant (= initial displacement).

This means that to get the correct uprighting (restoring) moments from the GZ values, GZ must be multiplied by the initial displacement.