


Chapter 5

Flow of an Incompressible Ideal Fluid

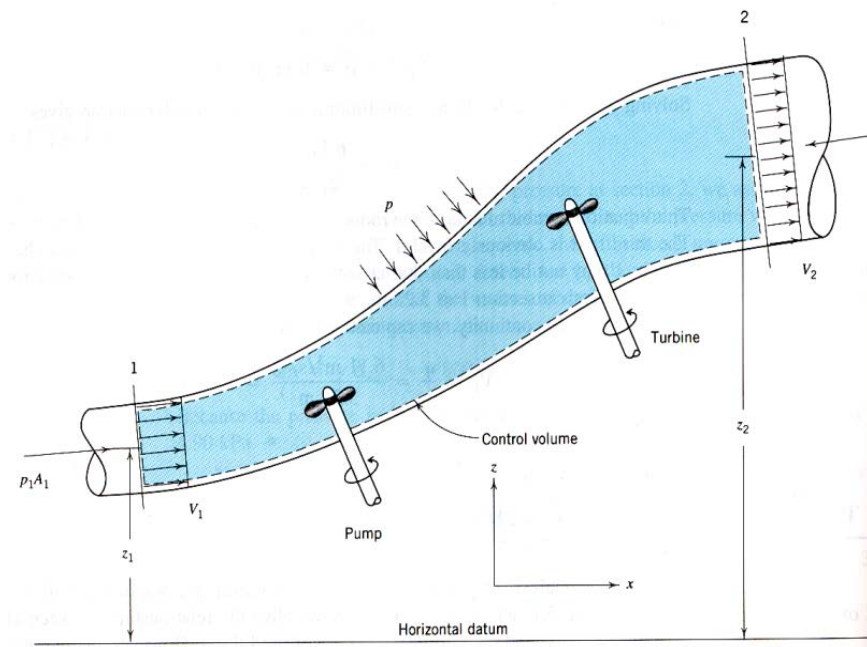

Chapter 5 Flow of an Incompressible Ideal Fluid

Contents

5.1 Euler's Equation

5.2 Bernoulli's Equation

5.3 Bernoulli Equation for the One-Dimensional flow

5.4 Application of Bernoulli's Equation

5.5 The Work-Energy Equation

5.6 Euler's Equation for Two-Dimensional Flow

5.7 Bernoulli's Equation for Two-Dimensional Flow

5.8 Stream Function and Velocity Potential



Chapter 5 Flow of an Incompressible Ideal Fluid

Objectives

- Apply Newton's 2nd law to derive equation of motion, Euler's equation
- Introduce the Bernoulli and work-energy equations, which permit us to predict pressures and velocities in a flow-field
- Derive Bernoulli equation and more general work-energy equation based on a control volume analysis

Chapter 5 Flow of an Incompressible Ideal Fluid

- What is ideal fluid?
 - An ideal fluid is a fluid assumed to be inviscid.
 - In such a fluid there are no frictional effects between moving fluid layers or between these layers and boundary walls.
 - There is no cause for eddy formation or energy dissipation due to friction.
 - Thus, this motion is analogous to the motion of a solid body on a frictionless plane.

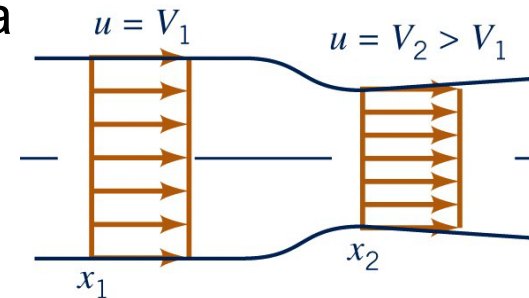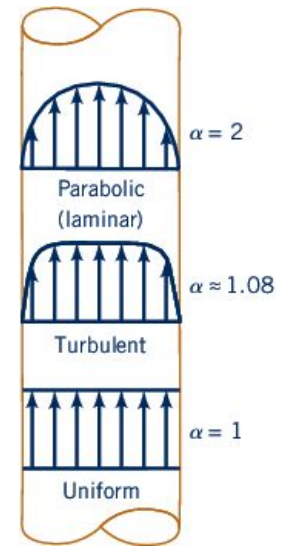

[Cf] real fluid – viscous fluid

Chapter 5 Flow of an Incompressible Ideal Fluid

- Why we first deal with the flow of ideal fluid instead of real fluid?
- Under the assumption of frictionless motion, equations are considerably simplified and more easily assimilated by the beginner in the field.
- These simplified equations allow solution of engineering problems to accuracy entirely adequate for practical use in many cases.
- The frictionless assumption gives good results in real situations where the actual effects of friction are small.

[Ex] the lift on a wing

Chapter 5 Flow of an Incompressible Ideal Fluid

- Incompressible fluid; $\frac{\partial \rho}{\partial(t, x, y, z)} = 0$

- ~ constant density

- ~ negligibly small changes of pressure and temperature

- ~ thermodynamic effects are disregarded

5.1 Euler's Equation

Euler (1750) first applied Newton's 2nd law to the motion of fluid particles.

Consider a streamline and select a small cylindrical fluid system in the streamline coordinates

$$\sum \vec{F} = m\vec{a}$$


Pressure force

$$(i) \quad dF = p dA - (p + dp) dA - dW \sin \theta$$

$$= -dp dA - \rho g dA ds \frac{dz}{ds}$$

$$= -dp dA - \rho g dA dz$$

$$(ii) \quad dm = \rho dA ds \text{ (density} \times \text{volume)}$$

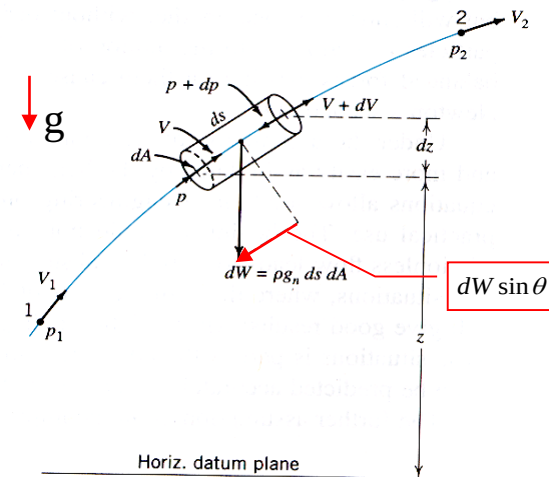

5.1 Euler's Equation

$$(iii) \quad a = \frac{dV}{dt} = \frac{dV}{ds} \frac{ds}{dt} = V \frac{dV}{ds}$$

$$\therefore -dpdA - \rho g dA dz = (\rho ds dA) V \frac{dV}{ds}$$

Dividing by ρdA gives the one-dimensional Euler's equation

$$\frac{dp}{\rho} + V dV + g dz = 0$$

Divide by g

$$\frac{dp}{\gamma} + \frac{1}{g} V dV + dz = 0$$

$$d(V^2) = 2V dV$$

$$\frac{dp}{\gamma} + d\left(\frac{V^2}{2g}\right) + dz = 0$$

5.1 Euler's Equation

For incompressible fluid flow,

$$d\left(\frac{p}{\gamma} + \frac{V^2}{2g} + z\right) = 0$$

→ 1-D Euler's equation (Eq. of motion)

5.2 Bernoulli's Equation

For incompressible fluid flow, integrating 1-D Euler's equation yields Bernoulli equation

$$\frac{p}{\gamma} + \frac{V^2}{2g} + z = \text{const.} = H \quad (5.1)$$

where H = total head

Between two points on the streamline, (5.1) gives

$$\frac{p_1}{\gamma} + \frac{V_1^2}{2g} + z_1 = \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2$$

$$\frac{p}{\gamma} = \text{pressure head}$$


$$\frac{\text{kg} \cdot \text{m/s}^2}{\text{m}^2} \bigg/ \frac{\text{kg} \cdot \text{m/s}^2}{\text{m}^3} = \text{m}$$

$$Z = \text{potential head (elevation head), m}$$

$$\frac{V^2}{2g} = \text{velocity head}$$

$$\frac{(\text{m/s})^2}{\text{m/s}} = \text{m}$$

5.2 Bernoulli's Equation

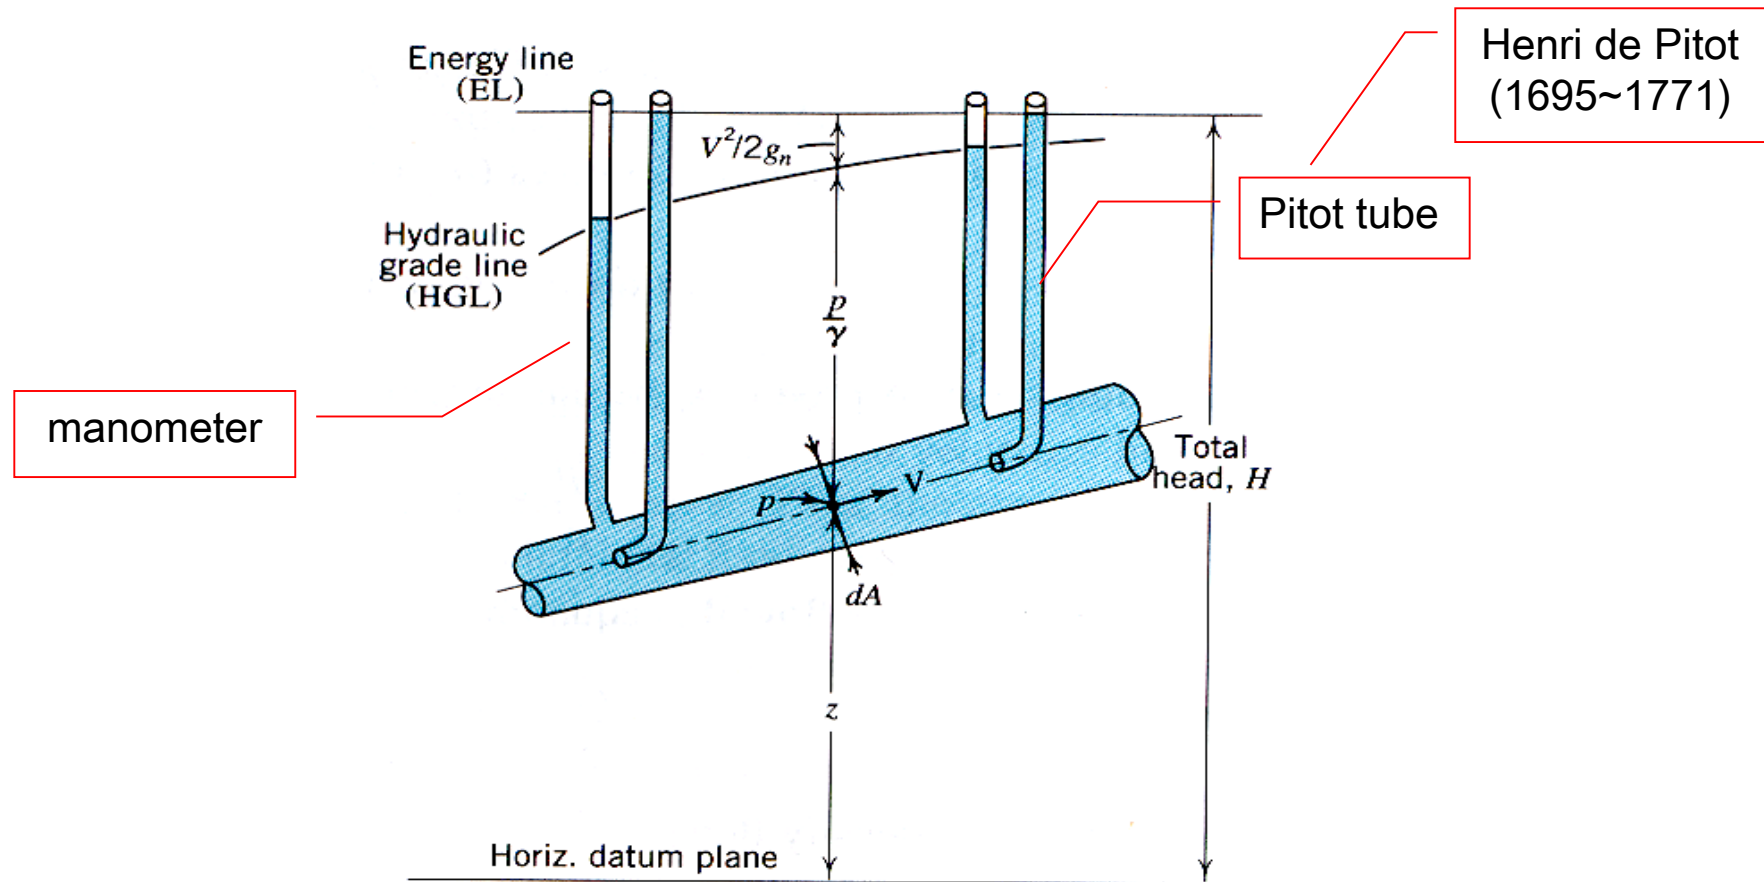

5.2 Bernoulli's Equation

 DANIEL BERNOULLI 1700 Groningen NL – 1782 Basel Study of mathematics and medicine in Basel 1725 Appointment to the Academy of Science at St. Petersburg by Katherine I (1684–1727) 1733 Return to Basel 1750 Professor for physics Achievements "Hydrodynamica", 1738 written during activities in St. Petersburg. The first work on fluid mechanics based on mathematical principles Promotion of Leonard Euler Genius in the fields of mechanics, physics and mathematics	 LEONHARD EULER 1707 Basel – 1783 St. Petersburg 1722 Mathematics and physics studies under Johann Bernoulli 1727 Emigration to St. Petersburg. The book on mechanics and the founding of the Modern Theory of Numbers 1741 Emigration to Berlin, work on differential calculus, but also technical expertises and research on canals, ship's rudders, pumps, turbines, guide vanes 1766 Return to St. Petersburg. Became blind Achievements • Perfect connection between understanding and intuition • Theory of structural strengths of tubes • Development of the Euler equation the basis of modern hydrodynamic
--	--

Bernoulli Family:
Jacob
Johann - Nikolaus
Daniel




5.3 Bernoulli Equation for the One-Dimensional flow

Bernoulli Eq. is valid for a single streamline or infinitesimal streamtube across which variation of p , V and Z is negligible.

This equation can also be applied to large stream tubes such as pipes, canals.

Consider a cross section of large flow through which all streamlines are precisely straight and parallel.

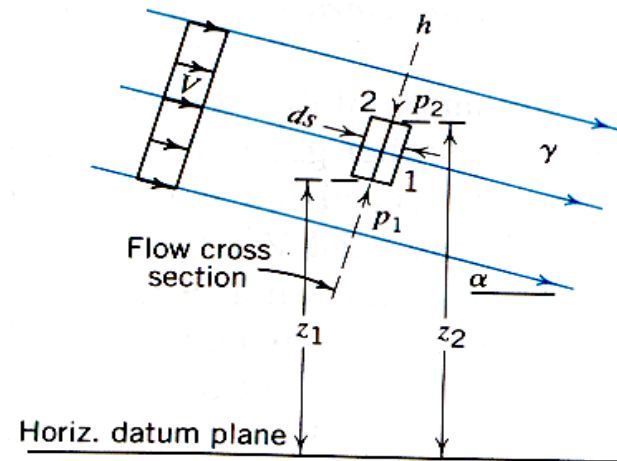

5.3 Bernoulli Equation for the One-Dimensional flow

i) Forces, normal to the streamlines, on the element of fluid are in equilibrium

→ acceleration toward the boundary is zero.

$$\sum \vec{F} = 0$$

$$(p_1 - p_2)ds - \gamma h ds \cos \alpha = 0$$

$$\therefore (p_1 - p_2)ds = \gamma(z_2 - z_1)ds$$

$$\cos \alpha = (z_2 - z_1) / h$$

(2.6)

$$\frac{p_1}{\gamma} + z_1 = \frac{p_2}{\gamma} + z_2$$

→ the same result as that in Ch. 2

→ quantity $\left(z + \frac{p}{\gamma} \right)$ is constant over the flow cross section normal to the streamlines when they are straight and parallel.

→ This is often called a hydrostatic pressure distribution

($z + \frac{p}{\gamma} = \text{const. for fluid at rest}$).

5.3 Bernoulli Equation for the One-Dimensional flow


ii) In ideal fluid flows, distribution of velocity over a cross section of a flow containing straight and parallel streamlines is uniform because of the absence of friction.

→ All fluid particles pass a given cross section at the same velocity, V (average velocity)

$$V_1 = V_2$$

Combine (i) and (ii)

$$\frac{p_1}{\gamma} + \frac{V_1^2}{2g} + z_1 = \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2$$

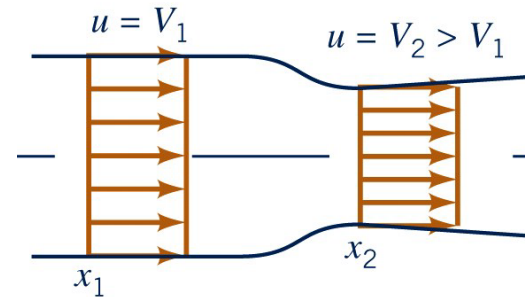

5.3 Bernoulli Equation for the One-Dimensional flow

→ Bernoulli equation can be extended from infinitesimal to the finite streamtube.


→ Total head H is the same for every streamline in the streamtube.

→ Bernoulli equation of single streamline may be extended to apply to 2- and 3-dimensional flows.

- Bernoulli's equation

$$\frac{p}{\gamma} + \frac{V^2}{2g} + z = H = \text{const.}$$

→ where velocity is high, pressure is low.

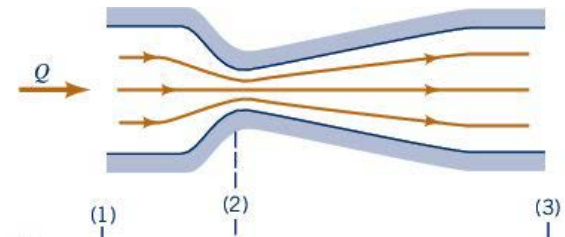


5.3 Bernoulli Equation for the One-Dimensional flow

[IP 5.1] p. 129

Water is flowing through a section of cylindrical pipe.

$$p_C = 35 \text{ kPa}, \gamma = 9.8 \times 10^3 \text{ N/m}^3$$

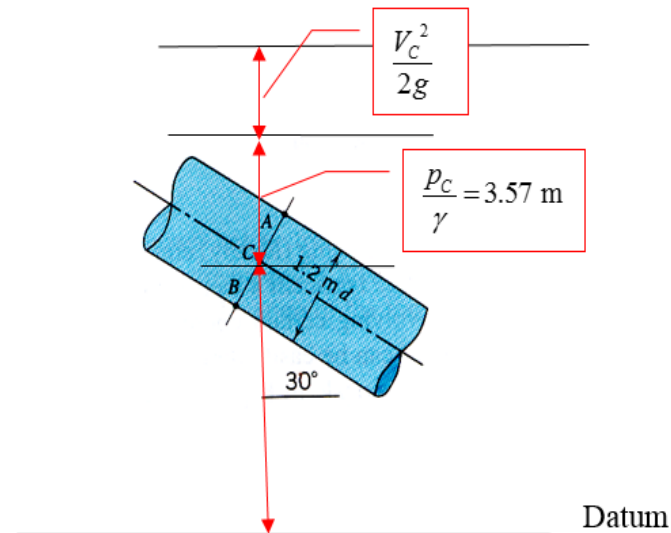

5.3 Bernoulli Equation for the One-Dimensional flow

[Sol]

$$\frac{p_A}{\gamma} + z_A = \frac{p_B}{\gamma} + z_B = \frac{p_C}{\gamma} + z_C$$



$$p_A = p_C + \gamma(z_C - z_A) = 35 \times 10^3 - (9.8 \times 10^3) \left(\frac{1.2}{2} \right) \cos 30^\circ = 29.9 \text{ kPa}$$

$$p_B = p_C + \gamma(z_C - z_B) = 35 \times 10^3 + (9.8 \times 10^3) \left(\frac{1.2}{2} \right) \cos 30^\circ = 40.1 \text{ kPa}$$


→ The hydraulic grade line is $\frac{p_C}{\gamma} = \frac{35 \times 10^3}{9.8 \times 10^3} = 3.57 \text{ m}$ above point C .

5.4 Applications of Bernoulli's Equation

- Use of Bernoulli equation
 - 1) Free jet problems
 - 2) Confined flows
 - 3) Flowrate measurement

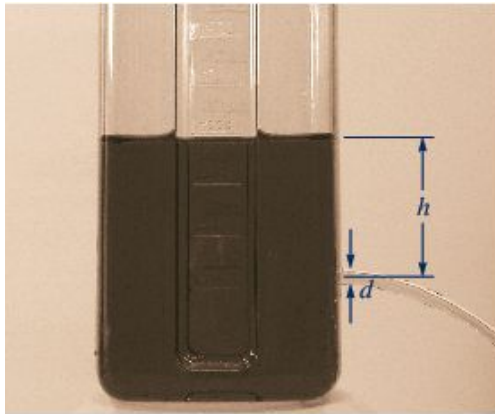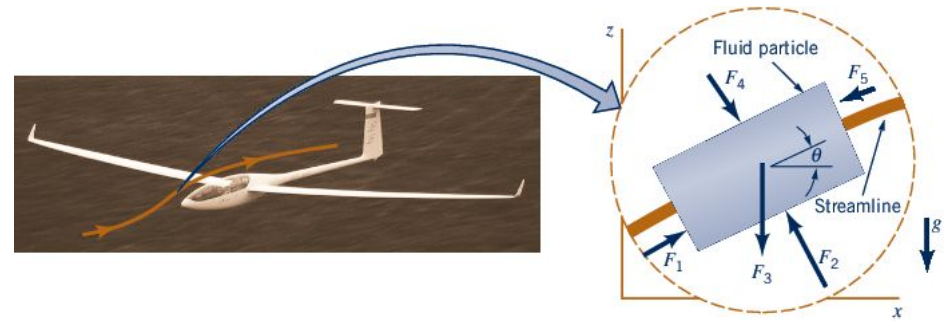

(b)

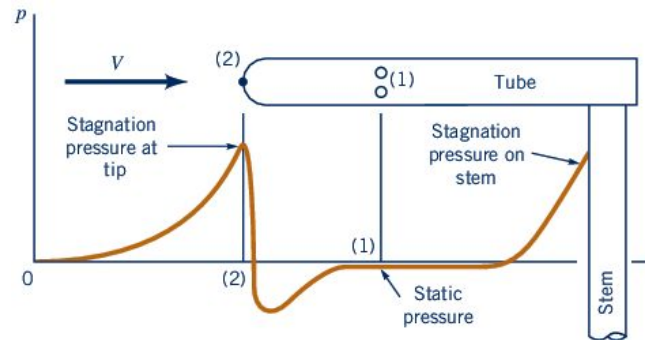


(a)


5.4 Applications of Bernoulli's Equation



(a)

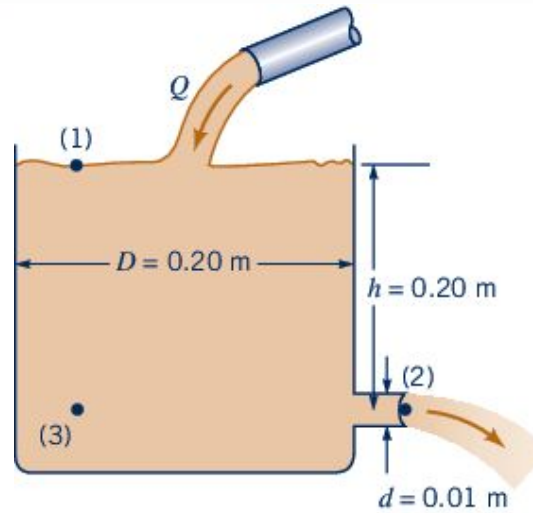





(b)

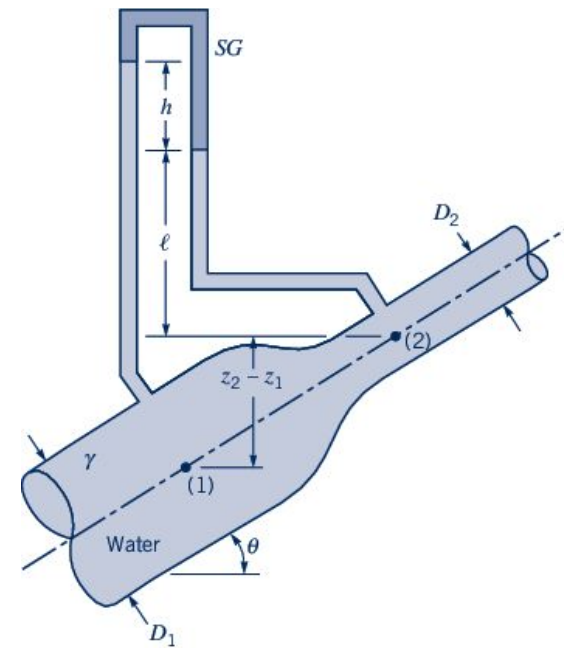

5.4 Applications of Bernoulli's Equation


- Bernoulli equation cannot be applied to the flows of

- 1) Real fluid
- 2) Eddies and flow separation
- 3) Pump and turbine

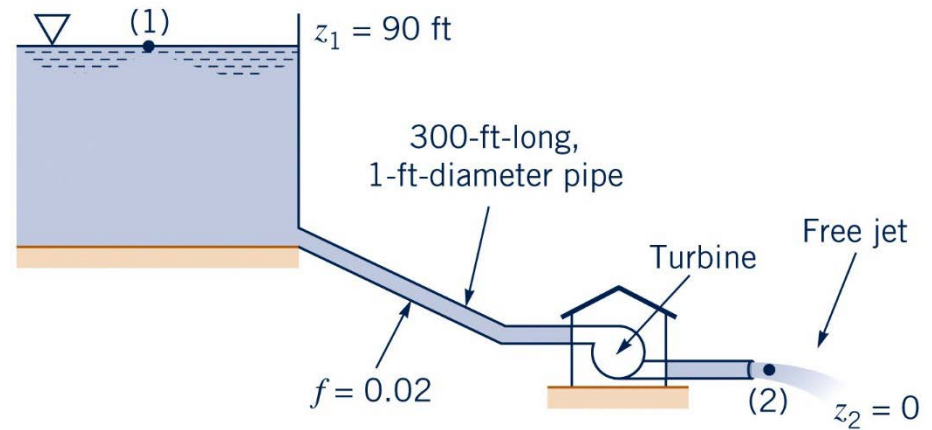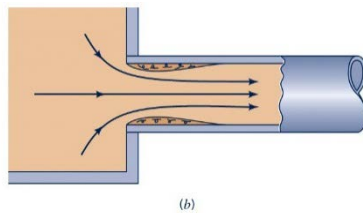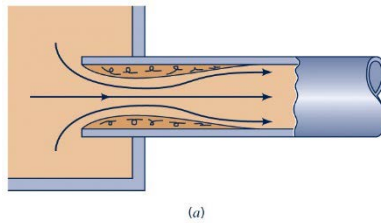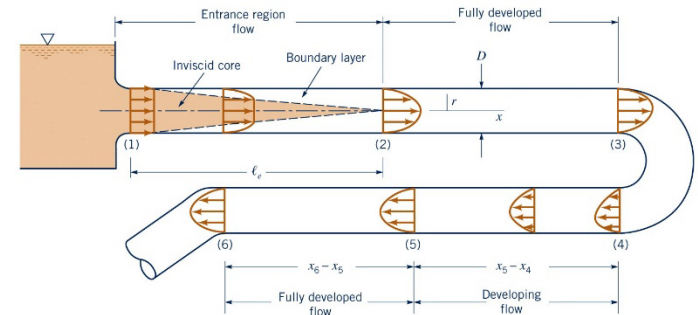

5.4 Applications of Bernoulli's Equation

- Torricelli's theorem (1643)
~ special case of the Bernoulli equation.

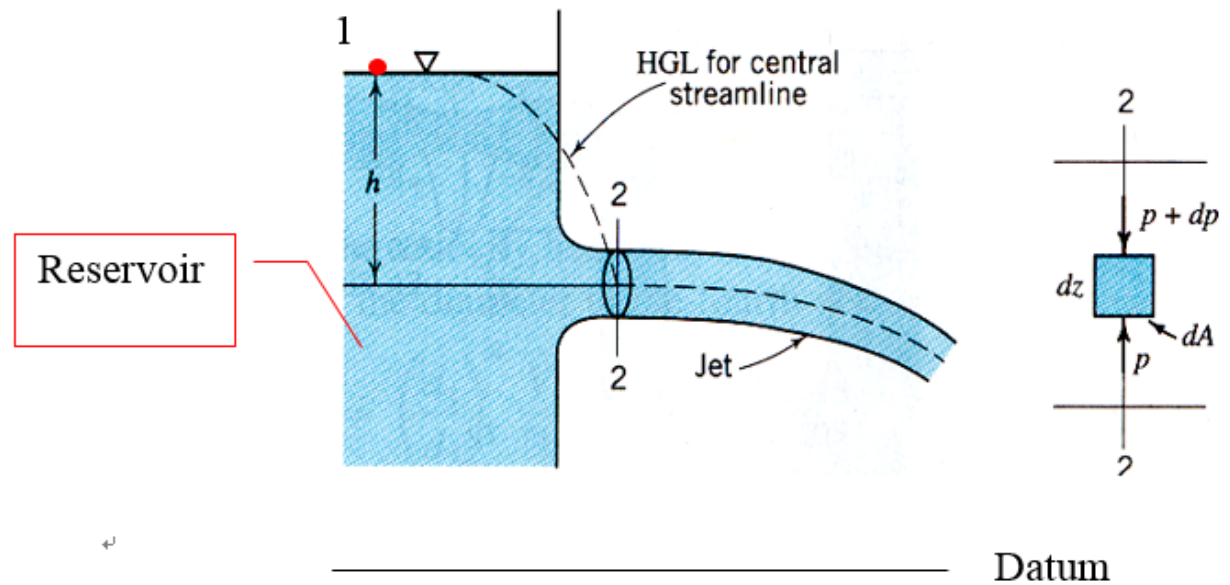

5.4 Applications of Bernoulli's Equation

Apply Bernoulli equation to points 1 and 2

$$\frac{p_1}{\gamma} + \frac{V_1^2}{2g} + z_1 = \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2$$

$$V_1 \cong 0 \text{ (for very large reservoir); } p_1 = p_{atm} = 0$$

$$z_1 = z_2 + \frac{V_2^2}{2g} + \frac{p_2}{\gamma}$$

$$z_1 - z_2 = h = \frac{p_2}{\gamma} + \frac{V_2^2}{2g} \quad (a)$$

5.4 Applications of Bernoulli's Equation

Apply Newton's 2nd law in the vertical direction at section 2

$$\sum F = ma$$

$$dF = -(p + dp)dA + pdA - \gamma dAdz = -dpdA - \gamma dAdz$$

$$dm = \rho dAdz$$

$$a = -g$$

$$\therefore -dAdp - \gamma dAdz = -(\rho dAdz)g$$

$$-dp - \gamma dz = -\gamma dz$$

$$\therefore dp = 0$$

→ no pressure gradient across the jet at section 2.

$$\rightarrow p_A = p_B = p_C = p_2$$

$$\therefore p_A = p_{atm} = 0 \text{ (gage)}$$

(b)

5.4 Applications of Bernoulli's Equation

Thus, combining (a) and (b) gives


$$h = \frac{V_2^2}{2g}$$

$$\rightarrow V_2 = \sqrt{2gh}$$

~ equal to solid body falling from rest through a height h .

5.4 Applications of Bernoulli's Equation

[IP 5.2] p.131 Flow in the pipeline for water intake

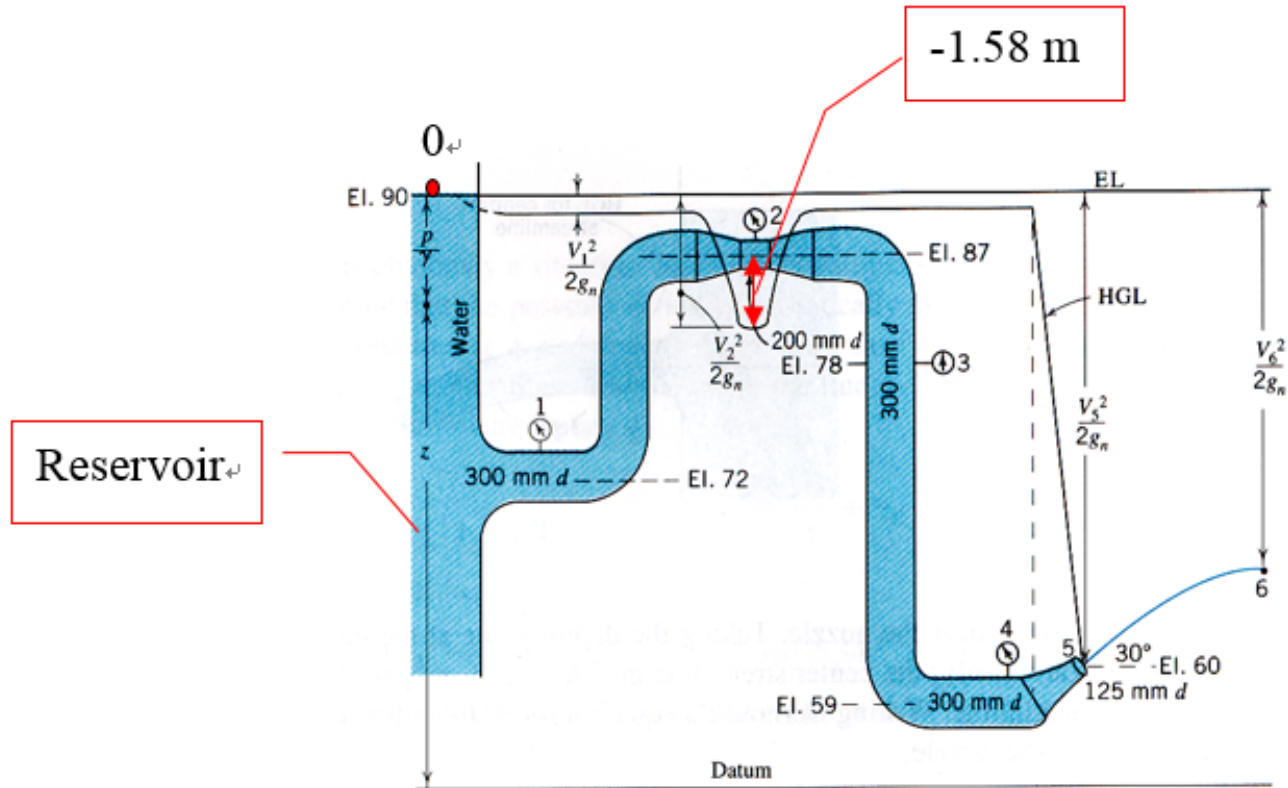

5.4 Applications of Bernoulli's Equation

Find: p_1, p_2, p_3, p_4 and elevation at point 6

[Sol] use Continuity and Bernoulli equations

(i) Bernoulli's Eq. between ① & ⑤

$$\frac{p_0}{\gamma} + \frac{V_0^2}{2g} + z_0 = \frac{p_5}{\gamma} + \frac{V_5^2}{2g} + z_5$$

$$p_0 = p_5 = p_{atm} = 0, \quad V_0 = 0$$

$$\rightarrow 90 = 60 + \frac{V_5^2}{2g}$$

$$V_5 = 24.3 \text{ m/s}$$

Calculate Q using Eq. (4.4)

$$Q = AV = 24.3 \times \frac{\pi}{4} (0.125)^2 = 0.3 \text{ m}^3/\text{s}$$

5.4 Applications of Bernoulli's Equation

(ii) Apply Continuity equation, Eq. (4.5)

$$A_1 V_1 = Q = A_5 V_5 \quad \therefore \quad V_1 = \left(\frac{125}{300} \right)^2 V_5 \quad (4.5)$$

$$\therefore \quad \frac{V_1^2}{2g} = \left(\frac{125}{300} \right)^4 \frac{V_5^2}{2g} = \left(\frac{125}{300} \right)^4 (30) = 0.9 \text{ m}$$

$$V_1 = \sqrt{0.9(2 \times 9.8)} = 4.2 \text{ m/s} = V_3 = V_4$$

Continuity
equation

$$\frac{V_2^2}{2g} = \left(\frac{125}{200} \right)^4 \frac{V_5^2}{2g} = \left(\frac{125}{200} \right)^4 (30) = 4.58 \text{ m},$$

$$V_2 = \sqrt{4.58(2 \times 9.8)} = 9.5 \text{ m/s}$$

5.4 Applications of Bernoulli's Equation

(iii) B. E. ③ & ①

$$90 = \frac{p_1}{\gamma} + \frac{V_1^2}{2g} + 72 \quad \text{of H}_2\text{O} \leftarrow \text{head}$$

$$\therefore \frac{p_1}{\gamma_w} = 18 - 0.9 = 17.1 \text{ m} \quad \text{of H}_2\text{O} \leftarrow \text{head}$$

$$p_1 = 17.1(9.8 \times 10^3) = 167.5 \text{ kPa}$$

(iv) B. E. ③ & ②

$$90 = \frac{p_2}{\gamma} + 87 + 4.58 \quad \therefore \frac{p_2}{\gamma} = -1.58 \text{ m}$$

$$p_2 = -1.58(9.8 \times 10^3) = -15.48 \text{ kPa} = \frac{-15.48 \times 10^3}{133.3} = \underline{116 \text{ mmHg vacuum}}$$

$$\rightarrow 15.48 \text{ kPa below } p_{atm}$$

5.4 Applications of Bernoulli's Equation

[Re] $1 \text{ bar} = 1000 \text{ mb}(\text{millibar}) = 100 \text{ kPa} = 100 \text{ kN/m}^2 = 10^5 \text{ N/m}^2$

$$p_{atm} = 760 \text{ mmHg} = 101.325 \text{ kPa}(10^5 \text{ pascal}) = 1013 \text{ mb}$$

$$1 \text{ mmHg} = 133.3 \text{ Pa} = 133.3 \text{ N/m}^2$$

(v) B. E. ㉔ & ㉓

$$90 = \frac{p_3}{\gamma} + 0.9 + 78$$

$$\therefore \frac{p_3}{\gamma} = 12 - 0.9 = 11.1 \text{ m}$$

$$p_3 = 108.8 \text{ kPa}$$

5.4 Applications of Bernoulli's Equation

(vi) B. E. ③ & ④

$$\frac{p_4}{\gamma} = 31 - 0.9 = 30.1 \text{ m}$$

$$p_4 = 295.0 \text{ kPa}$$

(vii) Velocity at the top of the trajectory

$$\rightarrow V_6 = 24.3 \cos 30^\circ = 21.0 \text{ m/s} \quad (5.2)$$

Apply B. E. ③ & ⑥

$$\therefore El. = 90 - \frac{21.0^2}{2g} = 67.5 \text{ m} \quad (5.3)$$

5.4 Applications of Bernoulli's Equation

	Point 0	Point 1	Point 2	Point 3	Point 4
Gage pressure, kPa	0	167.5	-15.48	108.7	294.9
Velocity, m/s	0	4.22	4.61	4.22	4.22
Elevation, m	90	72	87	78	59

5.4 Applications of Bernoulli's Equation

- Cavitation

As velocity or potential head increase, the pressure within a flowing fluid drops.

~ Pressure does not drop below the absolute zero of pressure.

$$(p_{atm} \approx 10^3 \text{ millibar} = 100 \text{ kPa} \quad \therefore p_{abs} = 0 \Rightarrow p_{gage} = -100 \text{ kPa})$$

~ Actually, in liquids the absolute pressure can drop only to the vapor pressure of the liquid.

5.4 Applications of Bernoulli's Equation

Vapor pressure of water

Temperature	p_v
10 °C	1.23 kPa
15 °C	1.70 kPa
20 °C	2.34 kPa

5.4 Applications of Bernoulli's Equation

[IP 5.3] p.134 Cavitation at the throat of pipe constriction

$p_B = 96.5 \text{ kPa} = \text{barometric pressure.}$


What diameter of constriction can be expected to produce incipient cavitation at the throat of the constriction?

Water at 40°C

$$\gamma = 9.73 \text{ kN/m}^3; \quad p_v = 7.38 \text{ kPa}$$

$$\frac{p_v}{\gamma} = \frac{7.38 \times 10^3 \text{ N/m}^2}{9.73 \times 10^3 \text{ N/m}^3} = 0.76 \text{ m}$$

$$\frac{p_B}{\gamma} = \frac{p_{atm}}{\gamma} = \frac{96.5 \times 10^3 \text{ N/m}^2}{9.73 \times 10^3 \text{ N/m}^3} = 9.92 \text{ m}$$

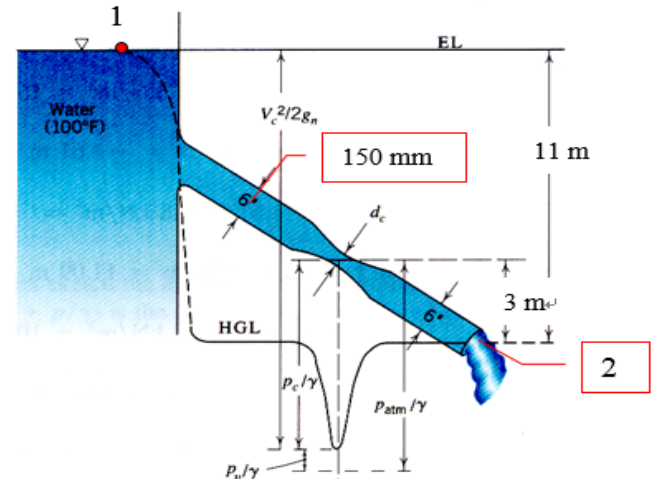

5.4 Applications of Bernoulli's Equation

(i) Bernoulli Eq. between ① and ㉔

$$z_1 + \frac{p_1}{\gamma} + \frac{V_1^2}{2g} = z_c + \frac{p_c}{\gamma} + \frac{V_c^2}{2g}$$

$$V_1 \approx 0, \quad p_1 = p_B, \quad p_c = p_v$$

Incipient cavitation

$$\therefore 11 + 9.92 + 0 = 3 + 0.76 + \frac{V_c^2}{2g}$$

$$\frac{V_c^2}{2g} = 17.16 \text{ m} \rightarrow V_c = 18.35 \text{ m/s}$$

5.4 Applications of Bernoulli's Equation

(ii) Bernoulli Eq. between ① and ②

$$z_1 + \frac{p_1}{\gamma} + \frac{V_1^2}{2g} = z_2 + \frac{p_2}{\gamma} + \frac{V_2^2}{2g}$$

$$V_1 \approx 0, \quad p_1 = p_2 = p_B$$

$$11 + 9.92 + 0 = 0 + 9.92 + \frac{V_2^2}{2g}$$

$$V_2 = 14.69 \text{ m/s}$$

5.4 Applications of Bernoulli's Equation

(iii) Continuity between ② and ③

$$Q = A_2 V_2 = A_c V_c$$

$$\frac{\pi}{4}(0.15)^2(14.69) = \frac{\pi}{4}d_c^2(18.35)$$

$$\therefore d_c = 0.134 \text{ m} = 134 \text{ mm} < 150 \text{ mm}$$

[Cp] For incipient cavitation,
critical gage pressure at point C is

$$\frac{p_c}{\gamma})_{gage} = -\left(\frac{p_{atm}}{\gamma} - \frac{p_v}{\gamma}\right) = -(9.92 - 0.76) = -9.16 \text{ m}$$

5.4 Applications of Bernoulli's Equation

• *Bernoulli Equation in terms of pressure*

$$p_1 + \frac{1}{2}\rho V_1^2 + \gamma z_1 = p_2 + \frac{1}{2}\rho V_2^2 + \gamma z_2$$

p_1 = static pressure (정압력)

$\frac{1}{2}\rho V_1^2$ = dynamic pressure (동압력)

γz = potential pressure (위치압력)

[Re] 정체압력=정압력+동압력


$$p_s = p + \frac{1}{2}\rho V^2$$

5.4 Applications of Bernoulli's Equation

- Stagnation pressure (정체압력), p_s

Apply Bernoulli equation between O and S

$$p_0 + \frac{1}{2}\rho V_0^2 + \gamma z_0 = p_s + \frac{1}{2}\rho V_s^2 + \gamma z_s$$

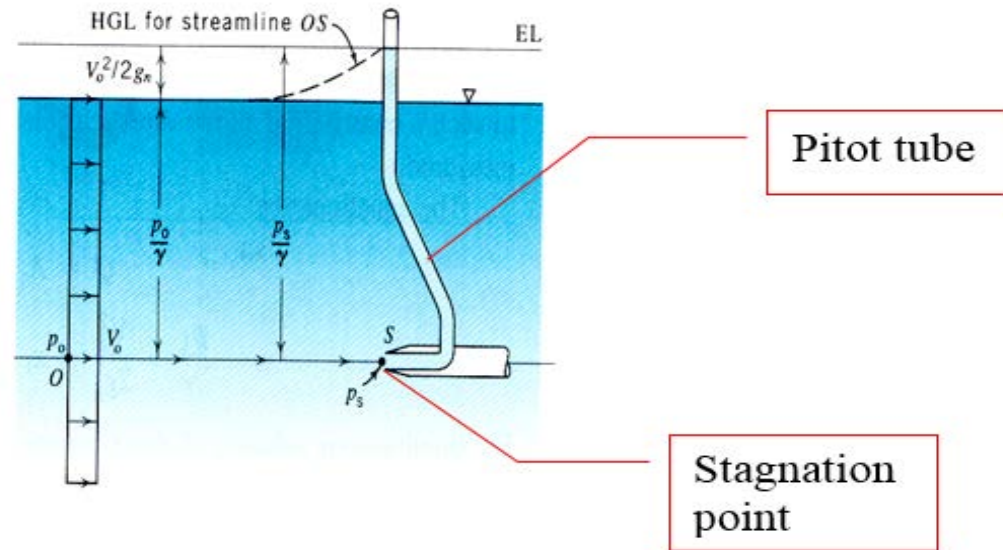






5.4 Applications of Bernoulli's Equation

$$z_0 = z_s; V_s \approx 0$$

$$p_0 + \frac{1}{2}\rho V_0^2 = p_s + 0$$

$$V_0 = \sqrt{\frac{2(p_s - p_0)}{\rho}}$$

▪ Pitot-static tube

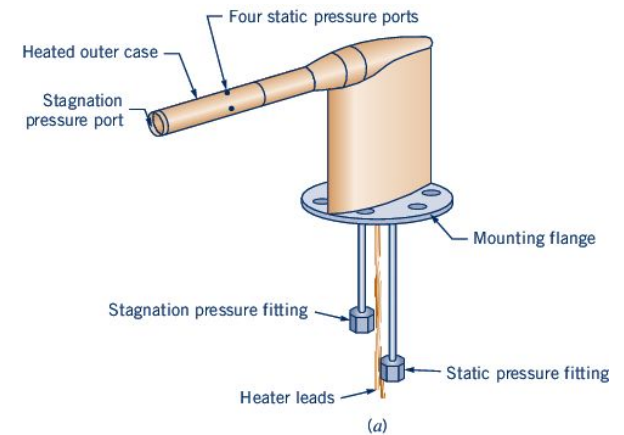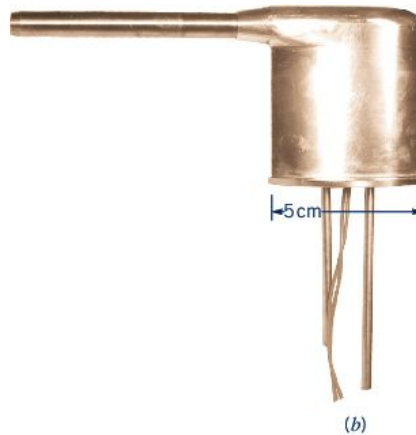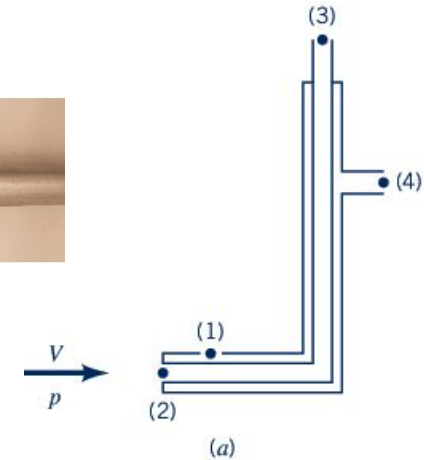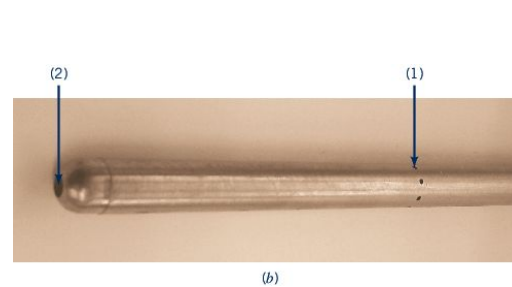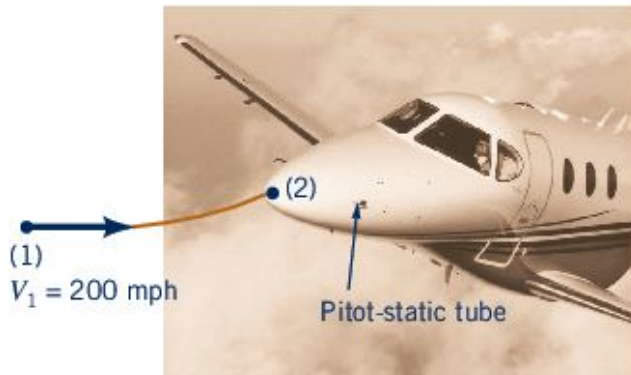


5.4 Applications of Bernoulli's Equation

[IP 5.4] p.136 Pitot-static tube

What is the velocity of the airstream, V_o ?

$$\rho_{air} = 1.23 \text{ kg/m}^3 \quad \gamma_w = 9,810 \text{ N/m}^3$$

$$V_o = \left[\frac{2}{\rho_a} (p_s - p_o) \right]^{\frac{1}{2}}$$

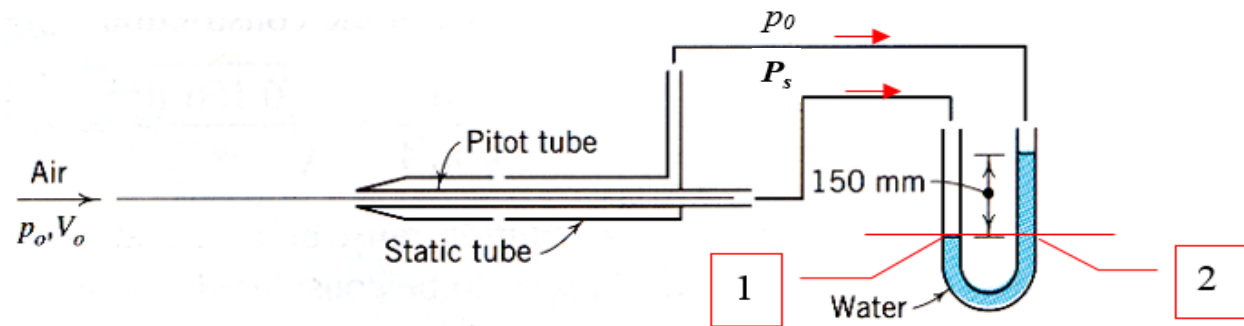

5.4 Applications of Bernoulli's Equation

By the way,

$$p_1 = p_2$$

$$p_1 = p_S + 0.15\rho_{air}g; \quad p_2 = p_0 + 0.15\gamma_w$$

$$\therefore p_S - p_0 = 0.15(\gamma_w - \rho_{air}g) = 0.15(9,810 - 12.1 \times 9.81) = 1,469.7 \text{ pa}$$

$$V_0 = \sqrt{\frac{2}{1.23}(1,469.7)} = 48.9 \text{ m/s}$$


[Cf] If $\gamma_{air} = \gamma_w = \gamma$

Then, $p_S - p_0 = \gamma h$



$$\therefore V_0 = \sqrt{2gh}$$

5.4 Applications of Bernoulli's Equation


- *Bernoulli principle for open flow*
- Flow over the spillway or weir: a moving fluid surface in contact with the atmosphere and dominated by gravitational action
 - At the upstream of the weir, the streamlines are straight and parallel and velocity distribution is uniform.
 - At the chute way, Section 2, the streamlines are assumed straight and parallel, the pressures and velocities can be computed from the one-dimensional assumption.
- Flow under the sluice gate

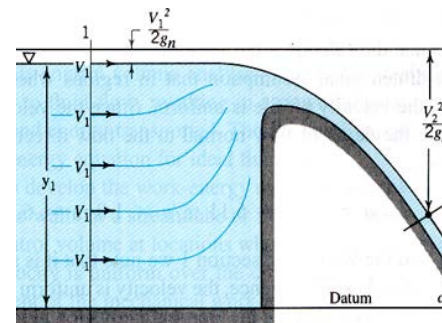

5.4 Applications of Bernoulli's Equation

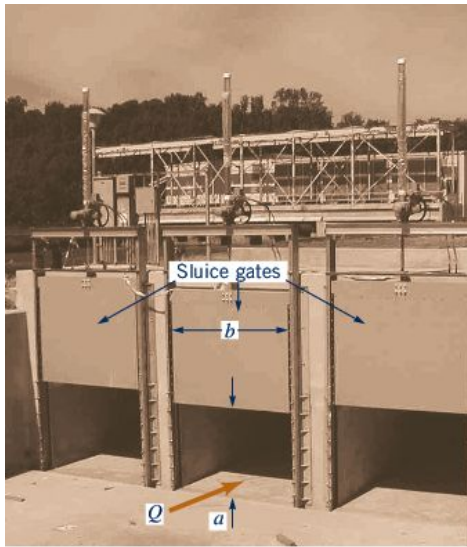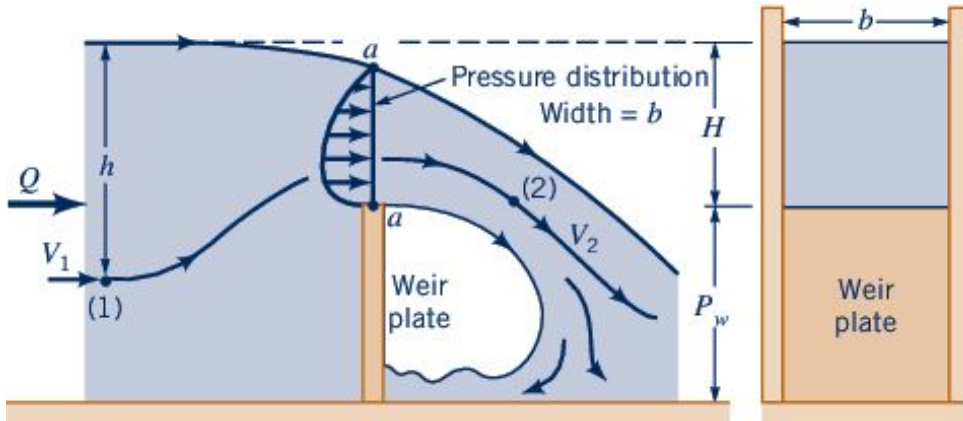

(a)

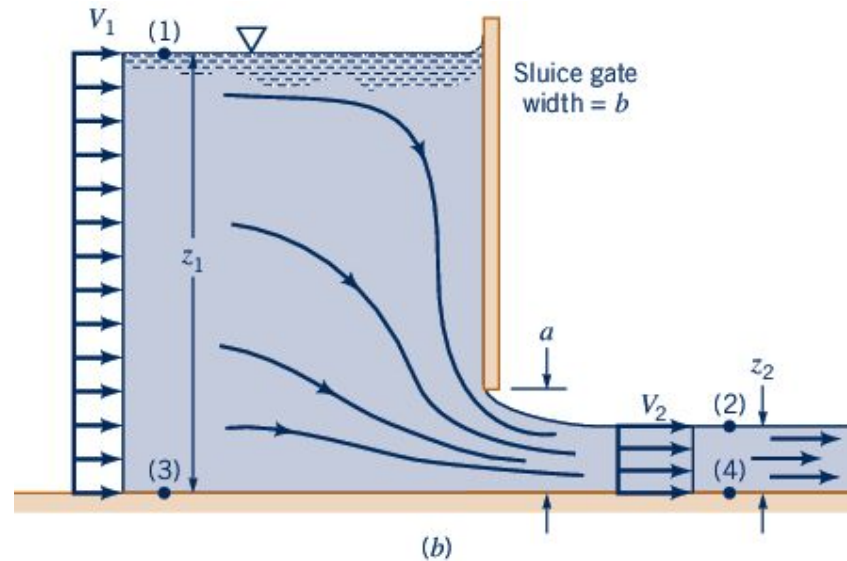

(b)

5.4 Applications of Bernoulli's Equation

[IP 5.6] p.139 Flow over a spillway

At section 2, the water surface is at elevation 30.5 m and the 60° spillway face is at elevation 30.0 m. The velocity at the water surface at section 2 is 6.11 m/s.

[Sol]


Thickness of sheet flow = $(30.5 - 30) / \cos 60^\circ = 1 \text{ m}$

Apply 1-D assumption across the streamline at section ②

$$\frac{\cancel{p_{w.s.}}}{\cancel{\gamma}} + z_{w.s.} = \frac{p_b}{\gamma} + z_b$$


$$\therefore p_b = \gamma(z_{w.s.} - z_b) = 9.8 \times 10^3 (0.5) = 4.9 \text{ kPa}$$

Elevation of energy line $H = 30.5 + \frac{(6.11)^2}{2g} = 32.4 \text{ m}$

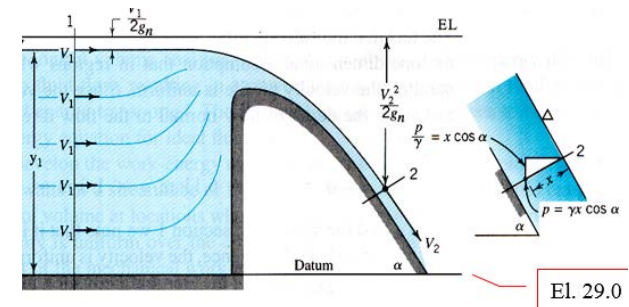

El. 29.0

5.4 Applications of Bernoulli's Equation

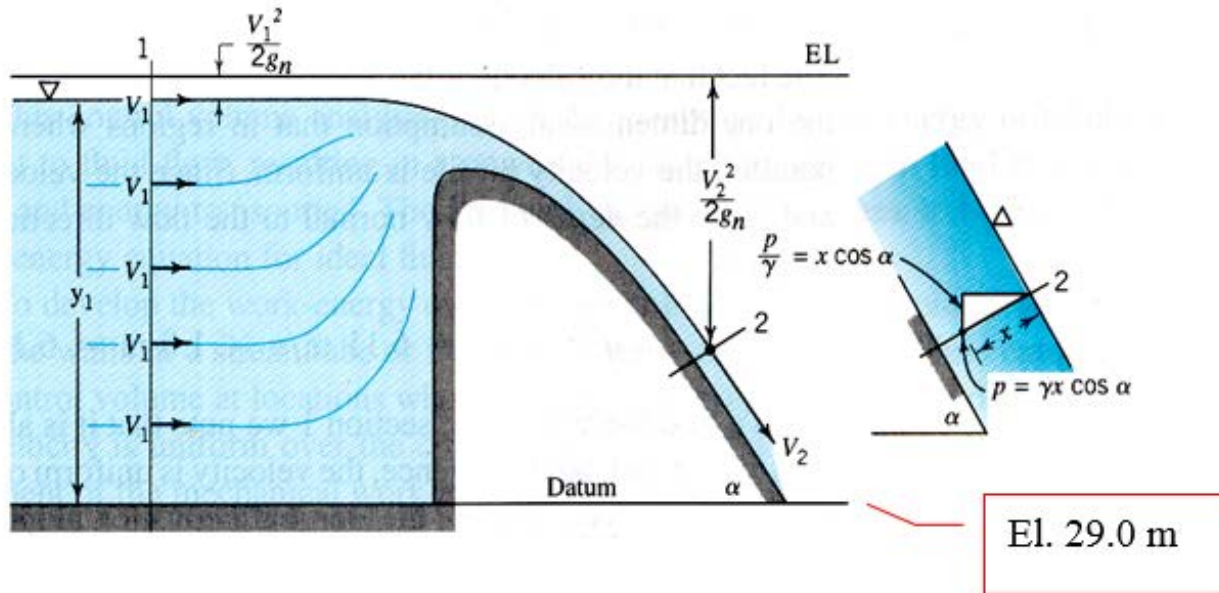

5.4 Applications of Bernoulli's Equation

Apply B.E. between ② and ⑥

$$\frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2 = \frac{p_b}{\gamma} + \frac{V_b^2}{2g} + z_b$$

Velocity is the same at both the surface and the bottom

$$32.4 = \frac{4.9}{9.8} + \frac{V_b^2}{2g} + 30.0 \quad \therefore V_b = 6.11 \text{ m/s}$$

$$q = h_2 V_2 = 1 \times 6.11 = 6.11 \text{ m}^2/\text{s} \quad \text{per meter of spillway length}$$

5.4 Applications of Bernoulli's Equation

Apply Bernoulli equation between ① and ②

$$y_1 + 29.0 + \frac{1}{2g} \left(\frac{6.11}{y_1} \right)^2 = 32.4$$

$$y_1 = 3.22 \text{ m}$$

$$V_1 = \frac{q}{h_1} = \frac{6.11}{3.22} = 1.9 \text{ m/s}$$



$$h_1 = y_1$$

5.5 The Work-Energy Equation

For pipelines containing pumps and turbines, the mechanical work-energy equation can be derived via a control volume analysis.

- pump = add energy to the fluid system
 └ turbine = extract energy from the fluid system
- Bernoulli equation = mechanical work-energy equation for ideal fluid flow

5.5 The Work-Energy Equation

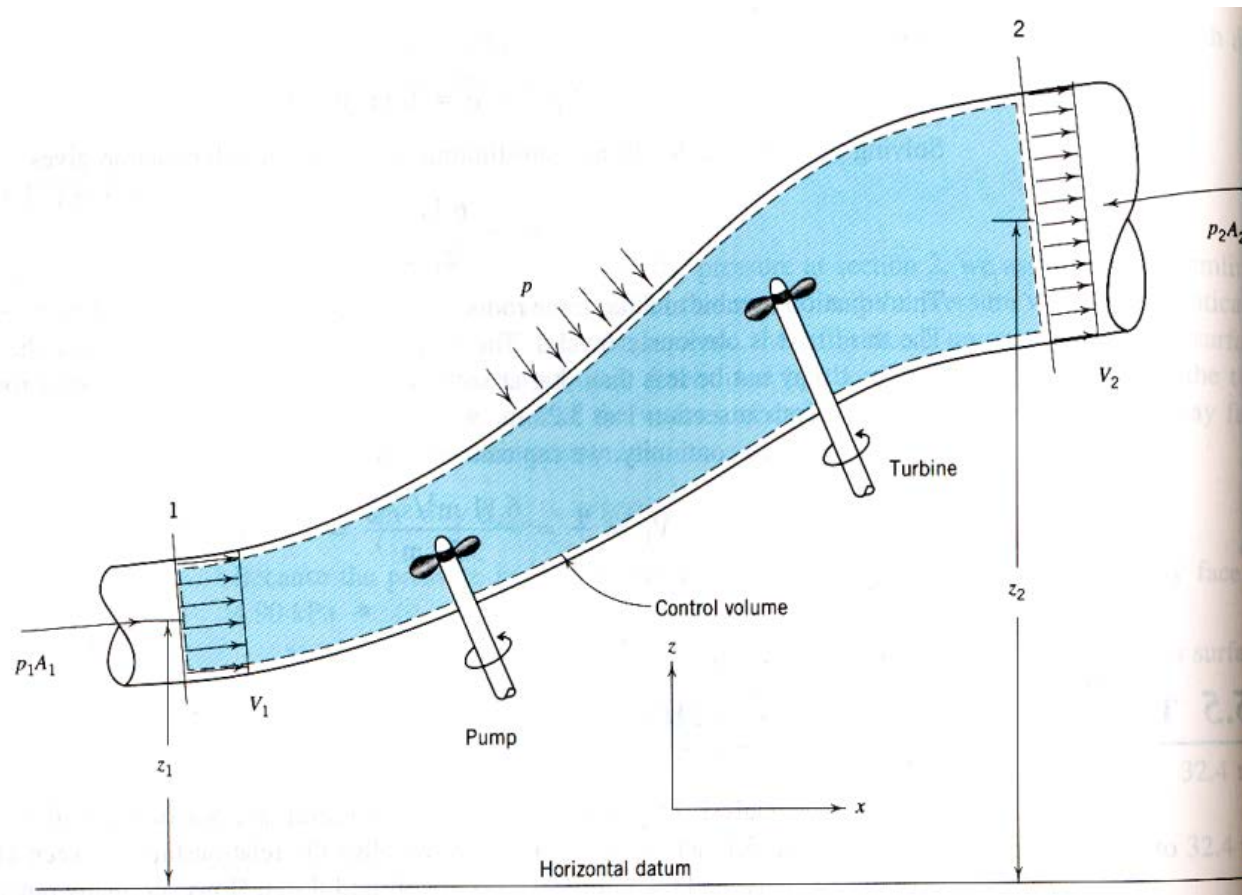

5.5 The Work-Energy Equation

Apply mechanical work-energy principle to steady flow

→ work done on a fluid system is exactly balanced by the change in the sum of the kinetic energy (KE) and potential energy (PE) of the system.

$$dW = dE \quad (1)$$

where dW = the increment of work done; dE = resulting incremental change in energy

~ Heat transfer and internal energy are neglected.

[Cf] The first law of Thermodynamics

~ Heat transfer and internal energy are included.

5.5 The Work-Energy Equation

Dividing (1) by dt yields

$$\frac{dW}{dt} = \frac{dE}{dt} \quad (2)$$

(i) Apply the Reynolds Transport Theorem to evaluate the rate of change of an extensive property, in this case energy, dE/dt

→ steady state form of the Reynolds Transport Theorem

$$\frac{dE}{dt} = \iint_{c.s.out} i \rho \vec{v} \cdot d\vec{A} + \iint_{c.s.in} i \rho \vec{v} \cdot d\vec{A} \quad (3) \quad \frac{\partial}{\partial t} \left(\iiint_{c.v.} i \rho dvol \right) \rightarrow \text{dropped}$$

where i = energy per unit mass

$$\boxed{\text{Potential energy}} \quad i = gz + \frac{V^2}{2} \quad \boxed{\text{Kinetic energy}} \quad (4)$$

5.5 The Work-Energy Equation

Substituting (4) into (3) gives

$$\frac{dE}{dt} = \iint_{c.s.out} \left(gz + \frac{V^2}{2} \right) \rho \vec{v} \cdot \vec{dA} + \iint_{c.s.in} \left(gz + \frac{V^2}{2} \right) \rho \vec{v} \cdot \vec{dA} \quad (5)$$

where $\frac{dE}{dt}$ = the rate of energy increase for the fluid system

→ Even in steady flow, the fluid system energy can change with time because the system moves through the control volume where both velocity and elevation can change.

Since the velocity vector is normal to the cross sectional area and the velocity is uniform over the two cross sections, integration of RHS of (5) yields

5.5 The Work-Energy Equation

$$\begin{aligned}\frac{dE}{dt} &= \rho \left(gz_2 + \frac{V_2^2}{2} \right) V_2 A_2 - \rho \left(gz_1 + \frac{V_1^2}{2} \right) V_1 A_1 \\ &= \rho g \left(z_2 + \frac{V_2^2}{2g} \right) V_2 A_2 - \rho g \left(z_1 + \frac{V_1^2}{2g} \right) V_1 A_1\end{aligned}\quad (6)$$

Continuity equation is

$$Q = V_2 A_2 = V_1 A_1 \quad (7)$$

Substituting the Continuity equation into (6) gives

$$\frac{dE}{dt} = Q \gamma \left[\left(z_2 + \frac{V_2^2}{2g} \right) - \left(z_1 + \frac{V_1^2}{2g} \right) \right] \quad (5.4)$$

5.5 The Work-Energy Equation

(ii) Now, evaluate the work done on the fluid system (dW)

1) Flow work done via fluid entering or leaving the control volume

→ Pressure work = $p \times \text{area} \times \text{distance}$

2) Shaft work done by pump and turbine

3) Shear work done by shearing forces action across the boundary of the system

→ $W_{shear} = 0$ for inviscid fluid

• Pressure work

~ consider only pressure forces at the control surface, $p_1 A_1$ and $p_2 A_2$

→ Net pressure work rate = pressure force x distance / time = pressure force x velocity

$$= p_1 A_1 V_1 - p_2 A_2 V_2 = Q(p_1 - p_2) \quad (8)$$

5.5 The Work-Energy Equation

- Shaft work

$W_T \leq 0$ (energy is extracted from the system)

$W_p \geq 0$ (energy is put in)

→ Net shaft work rate on the fluid = $Q\gamma E_p - Q\gamma E_T$ (9)

where E_p (E_T) = work done per unit weight of fluid flowing

Combining the two net-work-rate equations, Eqs. (8) and (9), yields

$$\text{Net work rate} = Q\gamma \left(\frac{p_1}{\gamma} - \frac{p_2}{\gamma} + E_p - E_T \right) \quad (5.5)$$

Equating Eqs. (5.4) and (5.5), we get

$$Q\gamma \left[\left(z_2 + \frac{V_2^2}{2g} \right) - \left(z_1 + \frac{V_1^2}{2g} \right) \right] = Q\gamma \left(\frac{p_1}{\gamma} - \frac{p_2}{\gamma} + E_p - E_T \right) \quad (5.6)$$

5.5 The Work-Energy Equation

Collecting terms with like subscripts gives

$$z_1 + \frac{p_1}{\gamma} + \frac{V_1^2}{2g} + E_P = z_2 + \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + E_T \quad (5.7)$$

Head, m

→ Work-energy equation

~ used in real fluid flow situations

~ Work-energy W/O E_P and E_T is identical to the Bernoulli equation for ideal fluid.

- Addition of mechanical energy (E_P) or extraction (E_T) cause abrupt rises of falls of energy line.

5.5 The Work-Energy Equation

- Power of machines

$$\text{Power} = \frac{W}{t} = \frac{\text{work}}{\text{time}} = \frac{\text{Force} \times \text{distance}}{\text{time}} = \frac{m g \times E}{t} = \frac{\rho \text{vol.} g \times E}{t} = \gamma \left(\frac{\text{vol.}}{t} \right) \times E = \gamma Q E$$

$$\text{Kilowatts (kW) of machine} = \gamma Q \frac{E_P \text{ or } E_T}{1,000} \quad (5.8)$$

5.5 The Work-Energy Equation

[IP 5.7] p.145 Work done by pump


The pump delivers a flowrate of $0.15 \text{ m}^3/\text{s}$ of water. How much power must the pump supply to the water to maintain gage readings of 250 mm of mercury vacuum on the suction side of the pump and 275 kPa of pressure on the discharge side? → 가압펌프

[Sol] $p_1 = -250 \text{ mm of Hg} < 760 \text{ mmHg}$
 $= -250 \times 133.3 \text{ N/m}^2 = -33,325 \text{ N/m}^2$

$$\frac{p_1}{\gamma} = \frac{-33,325}{9,800} = -3.39 \text{ m}$$

$$p_2 = 275 \text{ kPa} > 100 \text{ kPa}$$

$$\frac{p_2}{\gamma} = \frac{275 \times 10^3}{9,800} = 28.1 \text{ m}$$

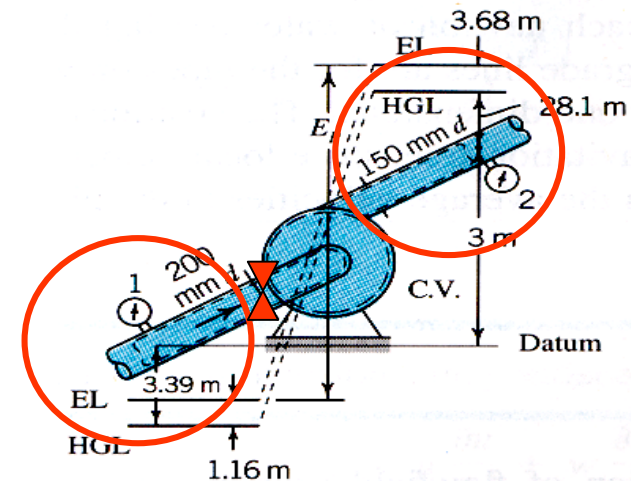

5.5 The Work-Energy Equation

Apply Continuity Equation


$$Q = A_1 V_1 = A_2 V_2$$

$$V_1 = \frac{0.15}{\frac{\pi}{4}(0.2)^2} = 4.8 \text{ m/s}$$

$$\therefore \frac{V_1^2}{2g} = \frac{4.8^2}{2 \times 9.8} = 1.16 \text{ m}$$

$$V_2 = \frac{0.15}{\frac{\pi}{4}(0.15)^2} = 8.5 \text{ m/s}$$

$$\therefore \frac{V_2^2}{2g} = \frac{8.5^2}{2 \times 9.8} = 3.68 \text{ m}$$

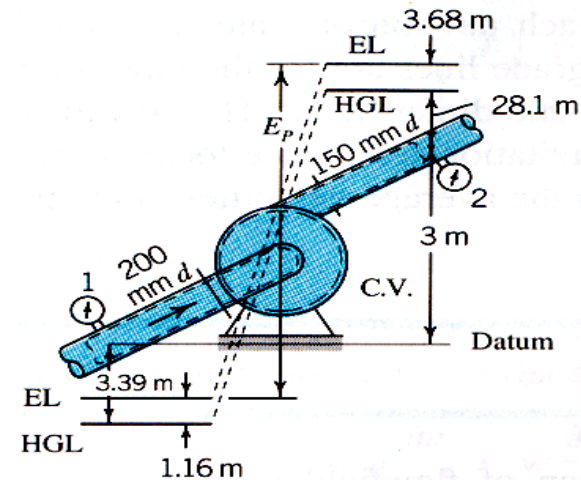

5.5 The Work-Energy Equation

Apply Work-Energy equation between ① & ②

$$\frac{p_1}{\gamma} + \frac{V_1^2}{2g} + z_1 + E_p = \frac{p_2}{\gamma} + \frac{V_2^2}{2g} + z_2 + E_T \quad (5.7)$$

$$-3.39 + 1.16 + 0 + E_p = 28.1 + 3.68 + 3$$

$$\therefore E_p = 37.0 \text{ m}$$

$$\text{Pump power} = \frac{Q\gamma(E_p)}{1,000} = \frac{0.15(9,800)(37.0)}{1,000} = 54.4 \text{ kW} \quad (5.8b)$$

- The local velocity in the pump passage may be considerably larger than the average velocity in the pipes.
→ There is no assurance that the pump will run cavitation-free.

5.6 Euler's Equations for Two-Dimensional Flow

- Two-Dimensional Flow
 - ~ The solution of flowfield problems is much more complex than the solution of 1D flow.
 - ~ Partial differential equations for the motion for real fluid are usually solved by computer-based numerical methods.
 - ~ present an introduction to certain essentials and practical problems
- Euler's equations for a vertical two-dimensional flow of ideal fluid may be derived by applying Newton's 2nd law of motion to differential system $dx dz$.

$$\sum \vec{F} = m\vec{a}$$

5.6 Euler's Equations for Two-Dimensional Flow

Force: **neglect shear force**

$$dF_x = -\frac{\partial p}{\partial x} dx dz$$

$$dF_z = -\frac{\partial p}{\partial z} dx dz - \rho g dx dz$$


Acceleration for **steady flow**:

$$a_x = u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} \left(+ \frac{\partial u}{\partial t} \text{ for unsteady flow} \right)$$

$$a_z = u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z}$$

$$x\text{-direction: } -\frac{\partial p}{\partial x} dx dz = \rho dx dz \left(u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} \right)$$

$$z\text{-direction: } -\frac{\partial p}{\partial z} dx dz - \rho g dx dz = \rho dx dz \left(u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z} \right)$$

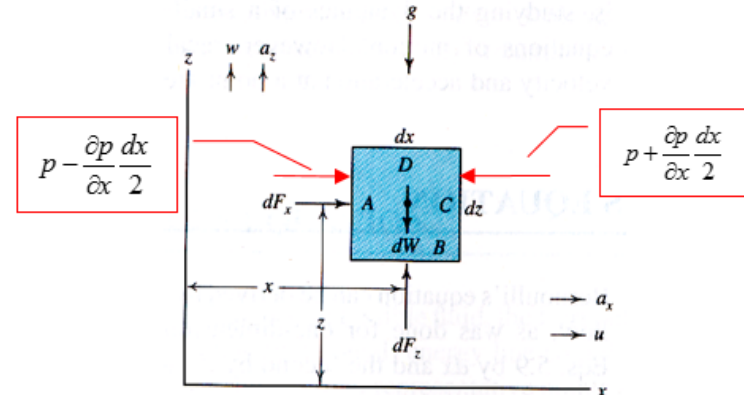

5.6 Euler's Equations for Two-Dimensional Flow

Euler's equation for 2-D flow

$$-\frac{1}{\rho} \frac{\partial p}{\partial x} = u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} \quad (5.9a)$$

$$-\frac{1}{\rho} \frac{\partial p}{\partial z} - g = u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z} \quad (5.9b)$$

- Equation of Continuity for 2-D flow of ideal incompressible fluid

$$\frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} = 0 \quad (4.11)$$

Unknowns: p, u, w

Equations: 3

→ simultaneous solution for non-linear PDE

5.7 Bernoulli's Equation for Two-Dimensional Flow

Bernoulli's equation can be derived by integrating the Euler's equations for a uniform density flow.

$$dx \times \left(-\frac{1}{\rho} \frac{\partial p}{\partial x} \right) = \left(u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} \right) \times dx \quad (a)$$

$$dz \times \left(-\frac{1}{\rho} \frac{\partial p}{\partial z} \right) = \left(u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z} + g \right) \times dz \quad (b)$$

$$(a)+(b): -\frac{1}{\rho} \left(\frac{\partial p}{\partial x} dx + \frac{\partial p}{\partial z} dz \right) = u \frac{\partial u}{\partial x} dx + w \frac{\partial u}{\partial z} dx + u \frac{\partial w}{\partial x} dz + w \frac{\partial w}{\partial z} dz + g dz$$

dp

5.7 Bernoulli's Equation for Two-Dimensional Flow

$$= \left(\underbrace{u \frac{\partial u}{\partial x} dx + u \frac{\partial u}{\partial z} dz}_{u du} \right) + \left(\underbrace{w \frac{\partial w}{\partial x} dx + w \frac{\partial w}{\partial z} dz}_{w dw} \right)$$

$u du$

$w dw$

$$+ u \frac{\partial w}{\partial x} dz - w \frac{\partial w}{\partial x} dx - \left(u \frac{\partial u}{\partial z} dz - w \frac{\partial u}{\partial z} dx \right) + g dz$$

vorticity

$$(udz - wdx) \left(\frac{\partial w}{\partial x} - \frac{\partial u}{\partial z} \right) = (udz - wdx) \xi$$

5.7 Bernoulli's Equation for Two-Dimensional Flow

By the way,

$$dp = \frac{\partial p}{\partial x} dx + \frac{\partial p}{\partial z} dz$$

$$du = \frac{\partial u}{\partial x} dx + \frac{\partial u}{\partial z} dz$$

$$dw = \frac{\partial w}{\partial x} dx + \frac{\partial w}{\partial z} dz$$

$$\xi = \frac{\partial w}{\partial x} - \frac{\partial u}{\partial z}$$

$$\frac{d(u^2)}{2} = \frac{2u du}{2} = u \frac{\partial u}{\partial x} dx + u \frac{\partial u}{\partial z} dz$$

5.7 Bernoulli's Equation for Two-Dimensional Flow

Incorporating these terms and dividing by g gives

$$-\frac{dp}{\gamma} = \frac{1}{2g} d(u^2 + w^2) + \frac{1}{g} (udz - wdx)\xi + dz \quad (c)$$

Integrating (c) yields

$$\frac{p}{\gamma} + \frac{1}{2g} (u^2 + w^2) + z = H - \frac{1}{g} \int \xi (udz - wdx) \quad (d)$$

where H = constant of integration

Substituting resultant velocity, V

$$V^2 = u^2 + w^2$$

5.7 Bernoulli's Equation for Two-Dimensional Flow

$$\frac{p}{\gamma} + \frac{V^2}{2g} + z = H - \frac{1}{g} \int \xi(udz - wdx) \quad (5.10)$$

(i) For irrotational (potential) flow $\xi = 0$

$$\frac{p}{\gamma} + \frac{V^2}{2g} + z = H \quad (5.11)$$

→ Constant H is the same to all streamlines of the 2-D flowfield.

(ii) For rotational flow ($\xi \neq 0$) : $\int \xi(udz - wdx) \neq 0$ (5.12)

However, along a streamline for steady flow,

$$\frac{w}{u} = \frac{dz}{dx} \rightarrow udz - wdx = 0 \quad (e)$$

5.7 Bernoulli's Equation for Two-Dimensional Flow

Substituting (e) into (5.10) gives


$$\frac{p}{\gamma} + \frac{V^2}{2g} + z = H \quad (5.13)$$

→ H is different for each streamline.

[Re]

For ideal incompressible fluid, for larger flow through which all streamlines are straight and parallel (irrotational flow)

→ Bernoulli equation can be applied to any streamline.

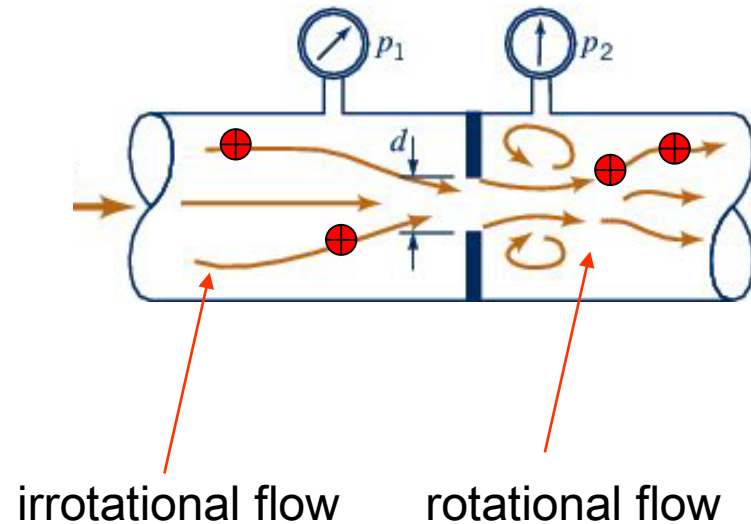

5.8 Stream Function and Velocity Potential

- The concepts of the stream function (흐름함수) and the velocity potential (속도포텐셜) can be used for developing of differential equations for two-dimensional flow.

→ decrease the number of unknowns

- 비압축성, 비회전류의 경우 흐름함수와 속도포텐셜을 도입하여 유속장 (u, v, w) 을 구할 수 있다.

장점: 미지수의 개수를 줄일 수 있음

단점: 방정식의 차수가 증가함

- 흐름함수: 유선의 식으로 부터 유도함
- 속도포텐셜: 순환 식으로 부터 유도함


5.8 Stream Function and Velocity Potential

5.8.1 Stream function

Definition of the stream function (흐름함수) is based on the continuity principle and the concept of the streamline.

→ provides a mathematical means of solving for two-dimensional steady flowfields.

Streamlines

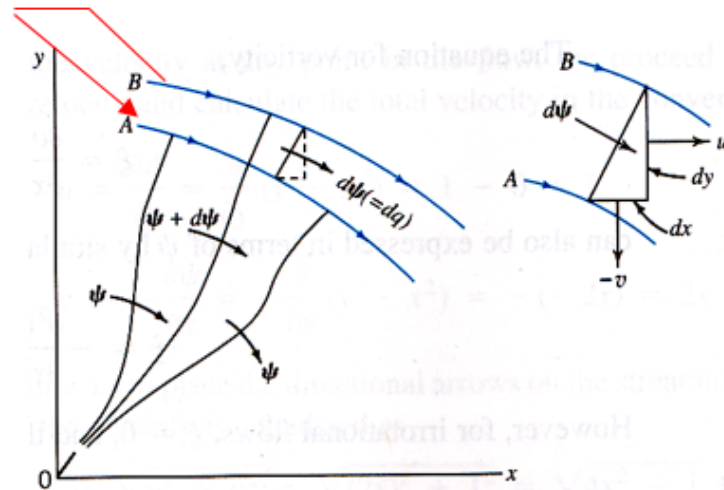

5.8 Stream Function and Velocity Potential

Consider streamline A: no flow crosses it

→ the flowrate ψ across all lines OA is the same.

→ ψ is a constant of the streamline.

→ If ψ can be found as a function of x and y , the streamline can be plotted.



The flowrate of the adjacent streamline B will be $\psi + d\psi$

The flowrates into and out of the elemental triangle are equal from continuity concept.

$$d\psi = -vdx + udy$$

Total derivative of $\psi(x, y)$ is given as

$$d\psi = \frac{\partial \psi}{\partial x} dx + \frac{\partial \psi}{\partial y} dy$$

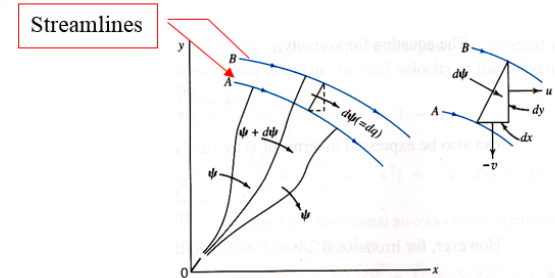

(a)

(5.14)

5.8 Stream Function and Velocity Potential

Compare (a) & (5.14)

$$u = \frac{\partial \psi}{\partial y} \quad (5.15a)$$

$$v = -\frac{\partial \psi}{\partial x} \quad (5.15b)$$

where ψ = stream function

→ If ψ is known u, v can be calculated.

Integrate (5.14)

$$\begin{aligned} \psi &= \int \frac{\partial \psi}{\partial x} dx + \int \frac{\partial \psi}{\partial y} dy + C \\ &= \int -v dx + \int u dy + C \end{aligned} \quad (b)$$

→ If u, v are known ψ can be calculated.

5.8 Stream Function and Velocity Potential

- Property of stream function

1) The equation of continuity

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (4.11)$$

Substitute (5.15) into (4.11)

$$\frac{\partial}{\partial x} \left(\frac{\partial \psi}{\partial y} \right) - \frac{\partial}{\partial y} \left(\frac{\partial \psi}{\partial x} \right) = 0$$

$$\therefore \frac{\partial^2 \psi}{\partial x \partial y} = \frac{\partial^2 \psi}{\partial y \partial x}$$

→ Flow described by a stream function always satisfies the continuity equation for incompressible fluid.

5.8 Stream Function and Velocity Potential

2) The equation of vorticity

$$\xi = \frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \quad (3.10)$$

Substitute (5.15) into (3.10)

$$\xi = \frac{\partial}{\partial x} \left(-\frac{\partial \psi}{\partial x} \right) - \frac{\partial}{\partial y} \left(+\frac{\partial \psi}{\partial y} \right) = -\frac{\partial^2 \psi}{\partial x^2} - \frac{\partial^2 \psi}{\partial y^2}$$

For irrotational flow, $\xi = 0$

$$\therefore \frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} = \nabla^2 \psi = 0 \rightarrow \text{Laplace Eq.}$$

→ The stream function of all irrotational flows must satisfy the Laplace equation.

5.8 Stream Function and Velocity Potential

5.8.2 Velocity Potential

Suppose that another function $\phi(x, y)$ is defined as

$$\vec{V} \equiv -\nabla \phi \equiv -\text{grad } \phi = -\left[\frac{\partial \phi}{\partial x} \vec{e}_x + \frac{\partial \phi}{\partial y} \vec{e}_y \right] \quad (\text{a})$$

By the way,

$$\vec{V} = u\vec{e}_x + v\vec{e}_y \quad (\text{b})$$

Comparing (a) and (b) gives

$$u = -\frac{\partial \phi}{\partial x} \quad (5.16)$$

$$v = -\frac{\partial \phi}{\partial y} \quad (5.17)$$

where ϕ = velocity potential (속도포텐셜)

5.8 Stream Function and Velocity Potential

- Property of potential function

1) The equation of continuity

Substitute Eq. (5.16) into continuity Eq.

$$\frac{\partial}{\partial x} \left(-\frac{\partial \phi}{\partial x} \right) + \frac{\partial}{\partial y} \left(-\frac{\partial \phi}{\partial y} \right) = 0$$

$$\rightarrow \frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} = 0 \quad \rightarrow \text{Laplace Eq.} \quad (5.18)$$

→ All practical flows which conform to the continuity Eq. must satisfy the Laplace equation in terms of ϕ .

5.8 Stream Function and Velocity Potential

2) Vorticity Eq.

Substitute Eq. (5.16) into vorticity eq.

$$\xi = \frac{\partial}{\partial x} \left(-\frac{\partial \phi}{\partial y} \right) - \frac{\partial}{\partial y} \left(-\frac{\partial \phi}{\partial x} \right) = -\frac{\partial^2 \phi}{\partial x \partial y} + \frac{\partial^2 \phi}{\partial y \partial x} = 0$$

- The vorticity must be zero for the existence of a velocity potential.
- irrotational flow = potential flow
- Only irrotational flowfields can be characterized by a velocity potential ϕ .

5.8 Stream Function and Velocity Potential

- Laplace equation


$$\nabla^2 \psi = \frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} = 0 \quad \text{for irrotational flow}$$

$$\nabla^2 \phi = \frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} = 0 \quad \text{for incompressible fluid flow}$$

- 해가 존재하는 선형 편미분방정식임
- 미지수의 개수를 4개 (u, v, w, p) 에서 2개(ϕ, p) 로 줄일 수 있음
- 유속장은 Laplace 방정식을 이용하여 구하고, 압력, p , 는 베르누이방정식을 이용하여 구함.

5.8 Stream Function and Velocity Potential

- Solution for potential flow problem

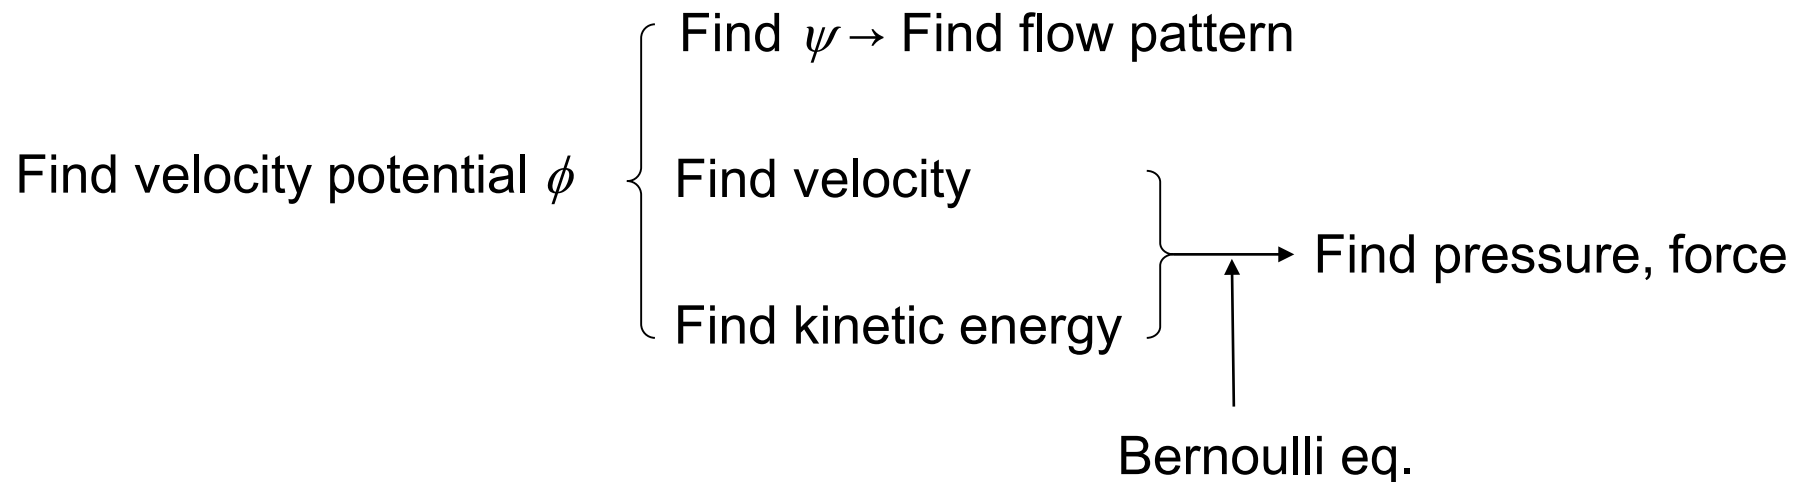

5.8 Stream Function and Velocity Potential

- Potential flow

$$\nabla^2 \phi = \frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} = 0 \quad \text{for incompressible fluid flow}$$

- 해가 존재하는 선형 편미분방정식임
- 선형방정식의 해들이 존재하는 경우 이 들에 상수를 곱한 것도 해가 되며,
- 이들 해를 더하거나 뺀 것도 해가 됨

solutions : ϕ_1, ϕ_2

$\rightarrow c\phi_1, c_1\phi_1 + c_2\phi_2$

5.8 Stream Function and Velocity Potential

Potential flows

1. Uniform flow



→ streamlines are all straight and parallel, and the magnitude of the velocity is constant

$$\frac{\partial \phi}{\partial x} = U, \quad \frac{\partial \phi}{\partial y} = 0$$

$$\phi = Ux + C$$

$$\frac{\partial \psi}{\partial y} = U, \quad \frac{\partial \psi}{\partial x} = 0$$

$$\psi = Uy + C'$$

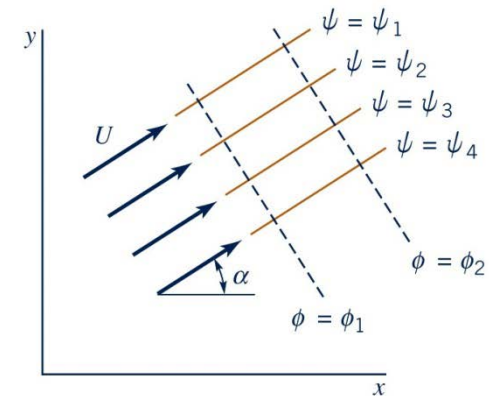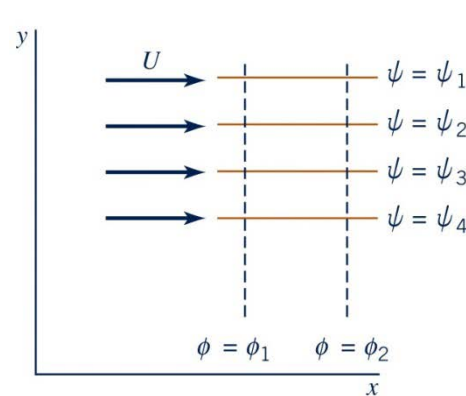


5.8 Stream Function and Velocity Potential

2. Source and Sink

- Fluid flowing radially outward from a line through the origin perpendicular to the x - y plane
- Let m be the volume rate of flow emanating from the line (per unit length)

$$(2\pi r)v_r = m$$

$$v_r = \frac{m}{2\pi r}$$

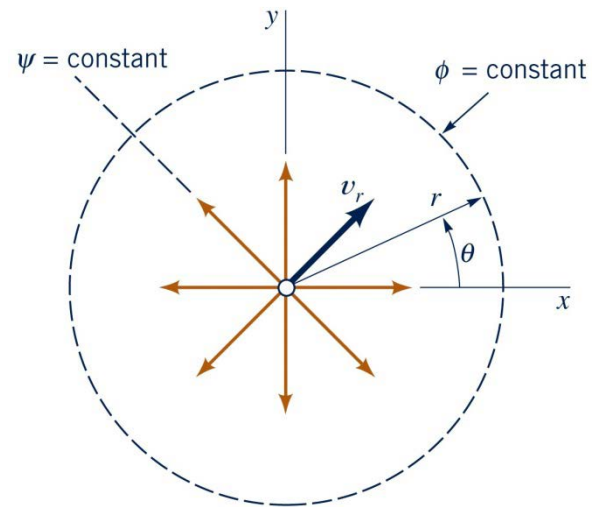

5.8 Stream Function and Velocity Potential

If m is positive, the flow is radially outward $\rightarrow$ source

If m is negative, the flow is radially inward $\rightarrow$ sink



$$\frac{\partial \phi}{\partial r} = \frac{m}{2\pi r}, \quad \frac{1}{r} \frac{\partial \phi}{\partial \theta} = 0$$

$$\phi = \frac{m}{2\pi} \ln r$$

$$v_r = \frac{1}{r} \frac{\partial \psi}{\partial \theta} = \frac{m}{2\pi r}$$

$$\psi = \frac{m}{2\pi} \theta$$

The streamlines are radial lines,
and equipotential lines are concentric circles.

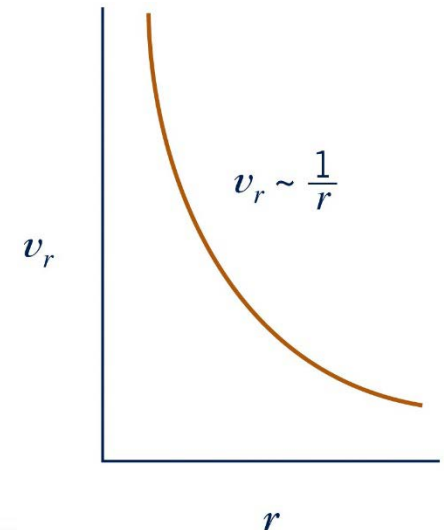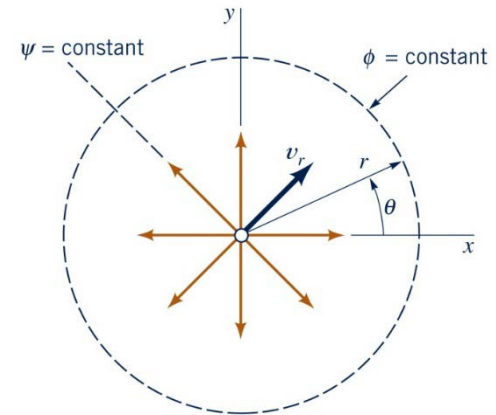

5.8 Stream Function and Velocity Potential

3. Vortex

Flow field in which the streamlines are concentric circles



In cylindrical coordinate

$$\phi = K\theta$$


$$\psi = -K \ln r$$

$$v_{\theta} = \frac{1}{r} \frac{\partial \phi}{\partial \theta} = -\frac{\partial \psi}{\partial r} = \frac{K}{r}$$

The tangential velocity varies inversely with distance from the origin.

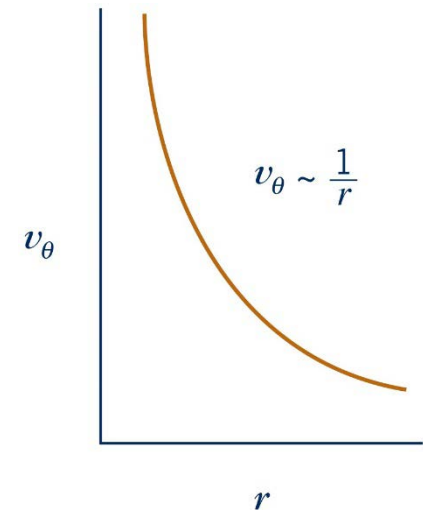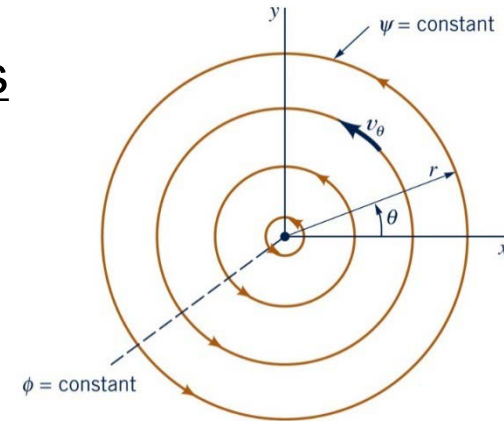


6.6 Irrotational Motion

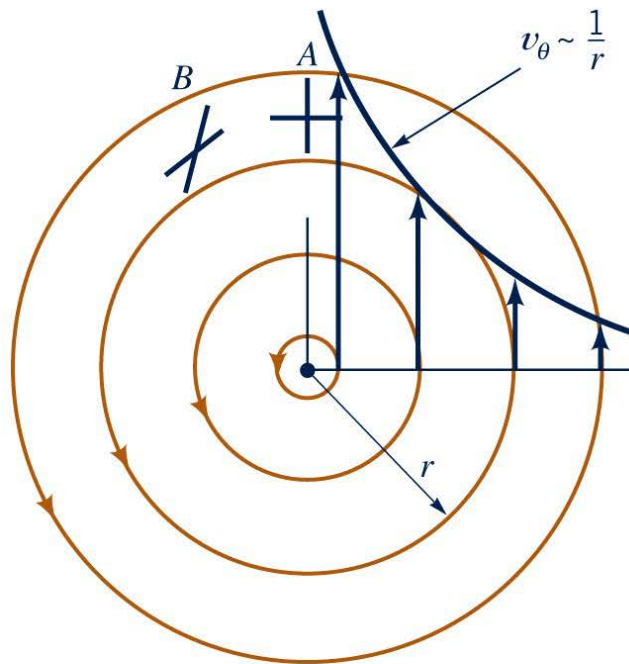

(a)

Free vortex

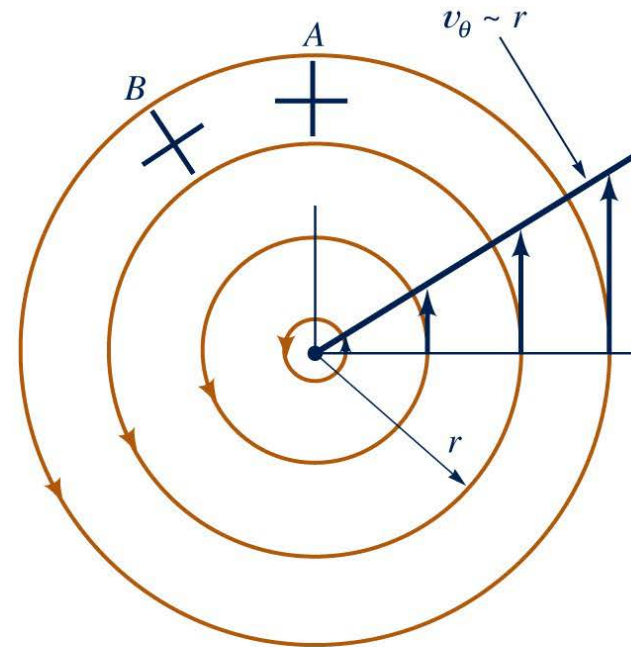

(b)

Forced vortex

5.8 Stream Function and Velocity Potential

[IP 5.14] p164

A flowfield is described by the equation $\psi = y - x^2$.

- 1) Sketch streamlines $\psi = 0, 1, 2$.
- 2) Derive an expression for the velocity V at any point.
- 3) Calculate the vorticity.

[Sol]

$$1) \psi = 0 \rightarrow 0 = y - x^2$$

$$\therefore y = x^2 \rightarrow \text{parabola}$$

$$\psi = 1 \rightarrow y = x^2 + 1$$

$$\psi = 2 \rightarrow y = x^2 + 2$$

5.8 Stream Function and Velocity Potential

$$2) \quad u = \frac{\partial \psi}{\partial y} = \frac{\partial}{\partial y}(y - x^2) = 1$$

$$v = -\frac{\partial \psi}{\partial x} = -\frac{\partial}{\partial x}(y - x^2) = 2x$$

$$\therefore V = \sqrt{u^2 + v^2} = \sqrt{(2x)^2 + 1^2} = \sqrt{4x^2 + 1}$$

$$3) \quad \xi = \frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} = \frac{\partial}{\partial x}(2x) - \frac{\partial}{\partial y}(1) = 2(s^{-1})$$

$\therefore \xi \neq 0 \rightarrow$ The flowfield is rotational.


Homework Assignment # 5

Homework Assignment # 5

Due: 1 week from today

1. (Prob. 5.6)


In a pipe 0.3 m in diameter, $0.3\text{m}^3/\text{s}$ of water are pumped up a hill. On the hilltop (elevation 48), the line reduces to 0.2 m diameter. If the pump maintains a pressure of 690 kPa at elevation 21, calculate the pressure in the pipe on the hilltop.

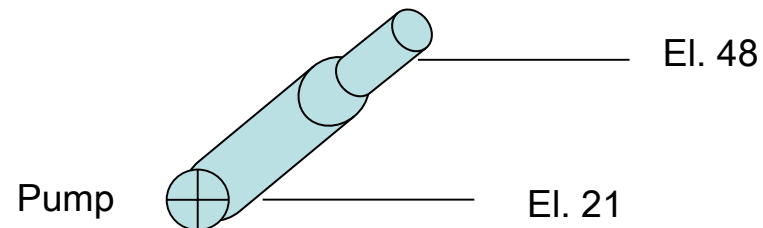

Homework Assignment # 5

2. (Prob. 5.11)

If the pressure in the 0.3 m pipe of problem 4.17 is 70 kPa, what pressures exist in the branches, assuming all pipes are in the same horizontal plane? Water is flowing.

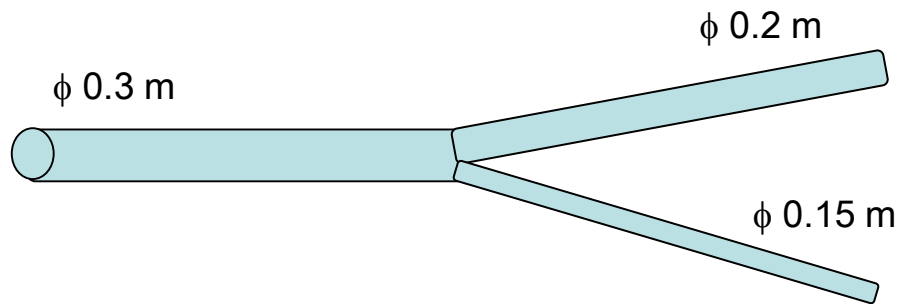

Homework Assignment # 5


3. (Prob. 5.24)

Water is flowing.

The flow picture is axisymmetric.

Calculate the flowrate and manometer reading.


Stagnation point

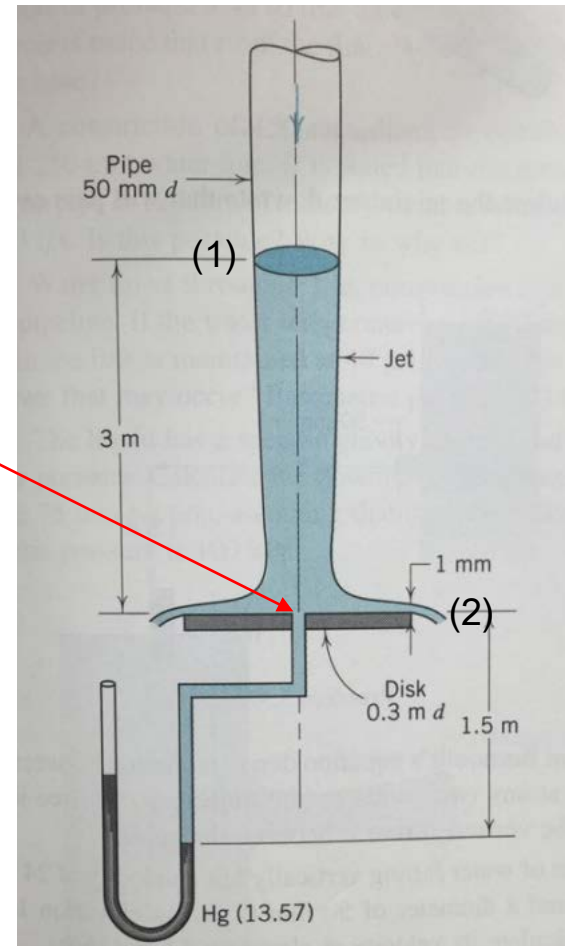

Homework Assignment # 5

4. (Prob. 5.30)


Calculate the pressure in the flow at A: (a) for the system shown, and (b) for the pipe without the nozzle. For both cases, sketch the EL and HGL.

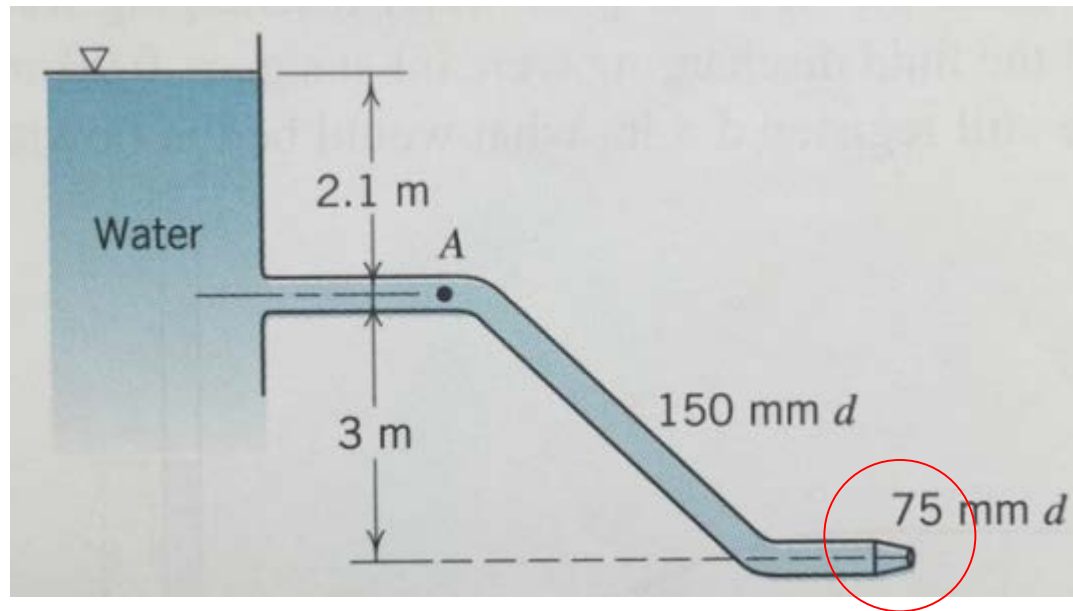

Homework Assignment # 5

5. (Prob. 5.46)

The liquid has a specific gravity of 1.60 and negligible vapor pressure. Calculate the flowrate for incipient cavitation in the 75 mm section, assuming that the tube flows full. Barometric pressure is 100 kPa.

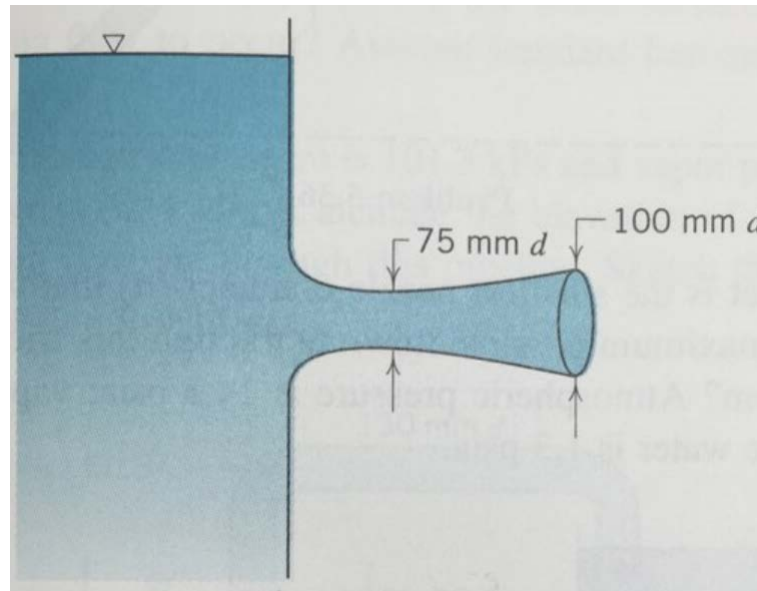


$$p_v = 0$$

$$p_{atm} = 100$$

Homework Assignment # 5

6. (Prob. 5.48)


Barometric pressure is 101.3 kPa. For $h > 0.6$ m, cavitation is observed at the 50 mm section. If the pipe is horizontal and flows full throughout, what is the vapor pressure of the water?

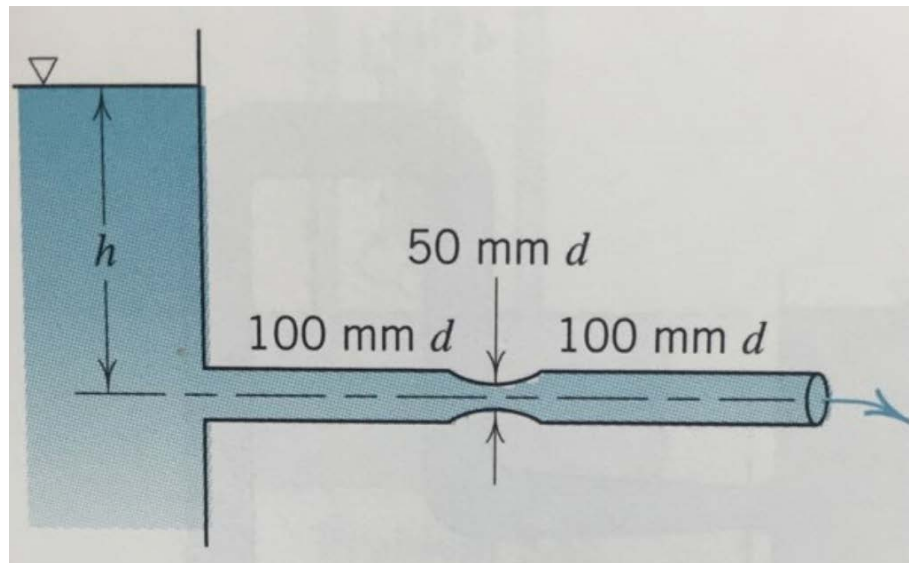

Homework Assignment # 5

7. (Prob. 5.59)


Cavitation occurs in this convergent-divergent tube as shown. The right-hand side of the manometer is connected to the cavitation zone. The water in the right-hand tube has all 40°C , calculate the gage reading if the local atmospheric pressure is 750 mm of mercury

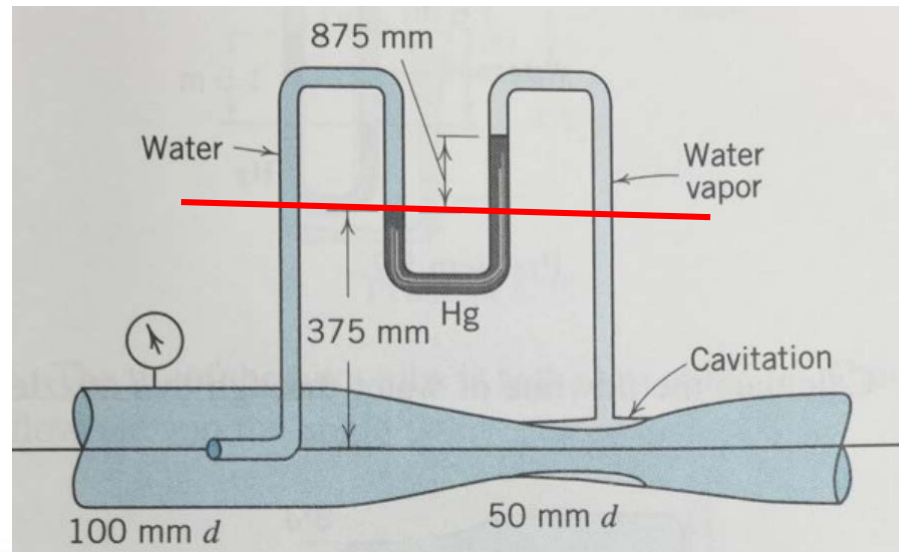

Homework Assignment # 5

8. (Prob. 5.89)


Calculate the two-dimensional flowrate through this frictionless sluice gate when the depth h is 1.5 m. Also calculate the depth h for a flowrate of $3.25 \text{ m}^3/\text{s}\cdot\text{m}$

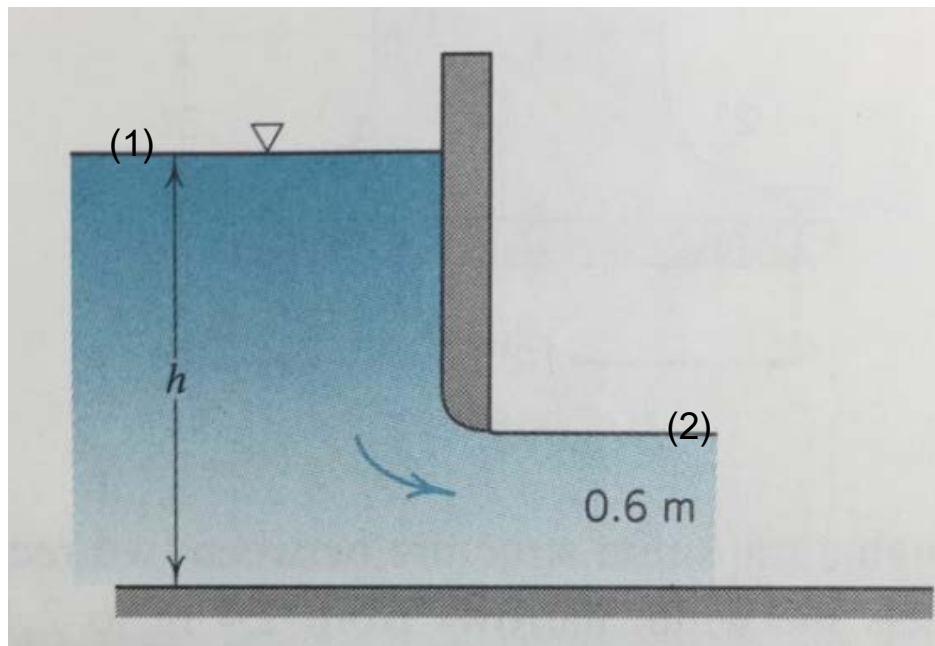

Homework Assignment # 5

9. (Prob. 5.98)


Water is flowing. Calculate the pump power for a flowrate of 28 l/s . Draw the EL and HGL.

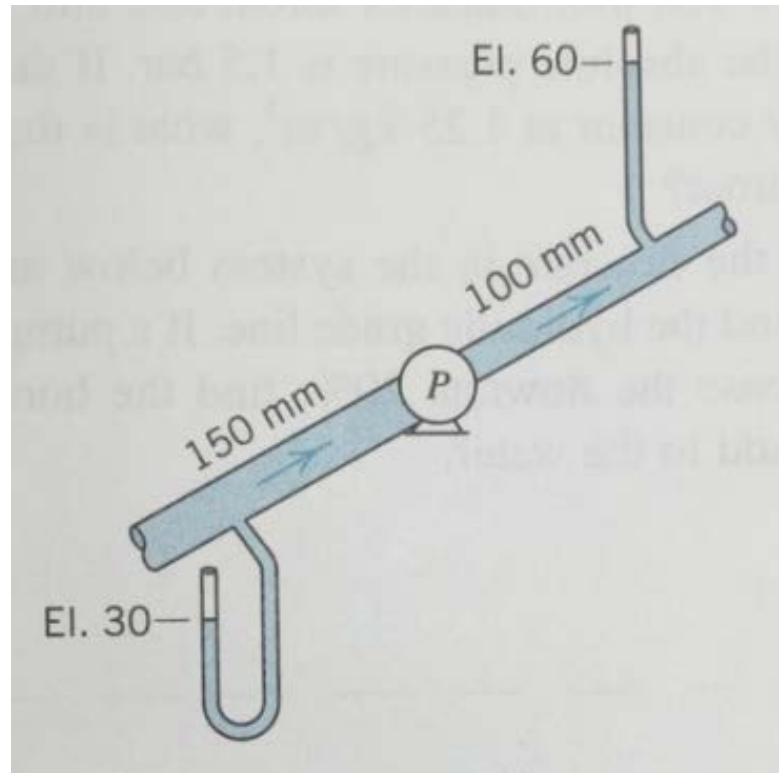

Homework Assignment # 5

10. (Prob. 5.104)


Calculate the pump power.

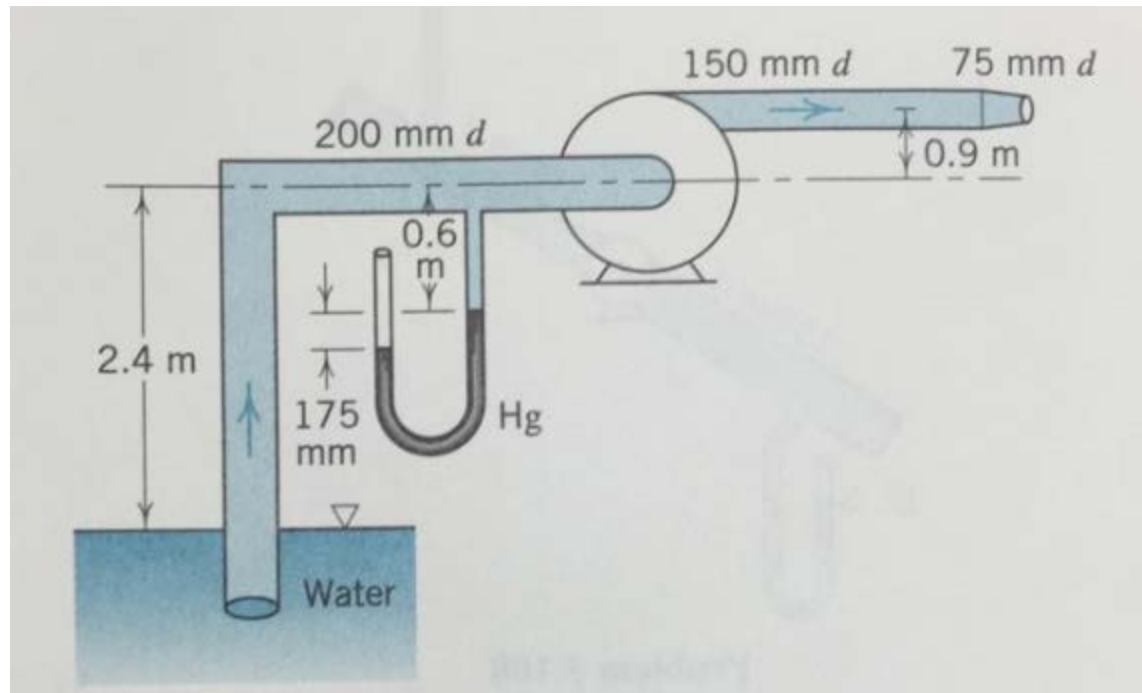

Homework Assignment # 5

11. (Prob. 5.119)


The turbine extracts from the flowing water half as much energy as remains in the jet at the nozzle exit. Calculate the power of the turbine.

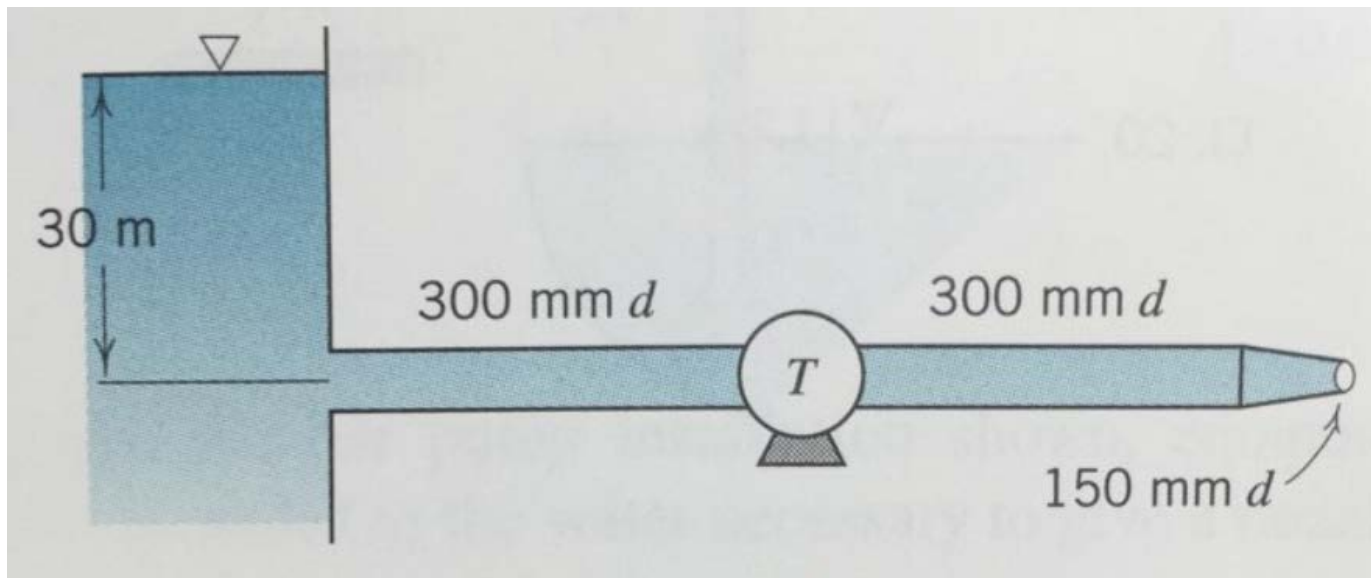

Homework Assignment # 5

12. (Prob. 5.123)

What is the maximum power the turbine can extract from the flow before cavitation will occur at some point in the system? Barometric pressure is 102 kPa, and vapor pressure of the water is 3.5 kPa.

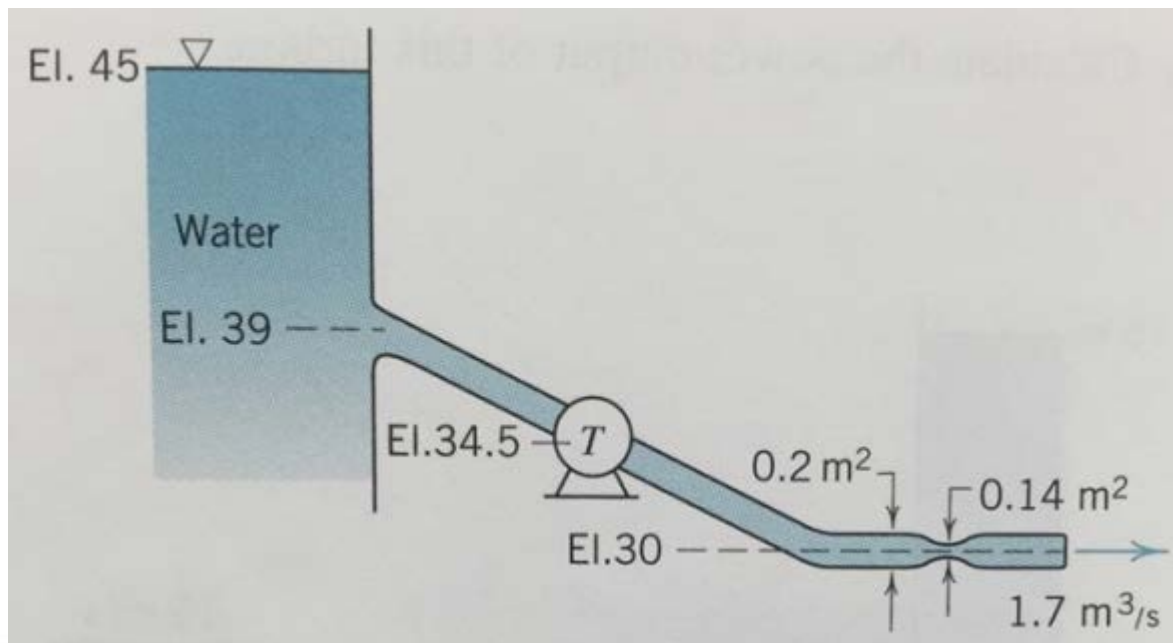

Homework Assignment # 5

13. (Prob. 5.149)

Determine the stream functions for the flowfields of problem 3.6 and plot the streamline $\psi = 2$.

14. (Prob. 5.157)

Determine the velocity potential ϕ for (a) the flow in problem 5.151 and (b) the flow in problem 5.152.