

Photoelectrochemical cells

1. Semiconductor basics
2. Semiconductor-electrolyte interface
3. Light absorption
4. Photoelectrochemical effects
5. Photoelectrochemical cells

Semiconductor basics



Figure 15.1 Illustration of energy bands formed in a crystalline solid.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

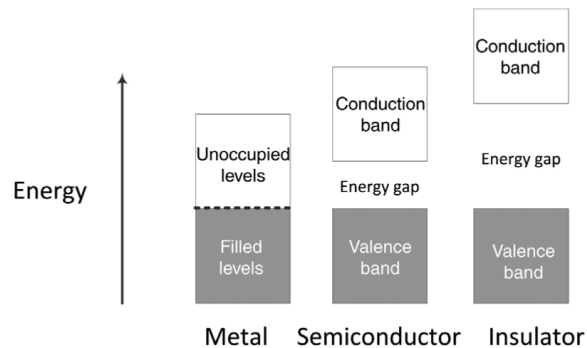


Figure 15.2 Energy bands and energy (band) gaps for different types of solid materials.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

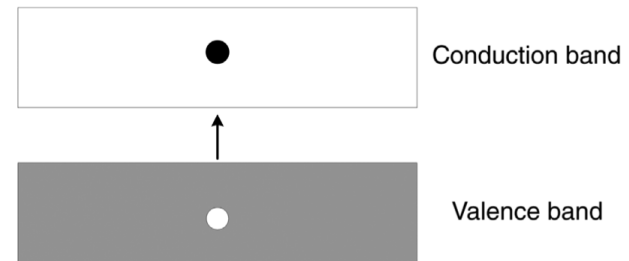


Figure 15.3 Excitation of an electron from the valence band to the conduction band of a semiconductor.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

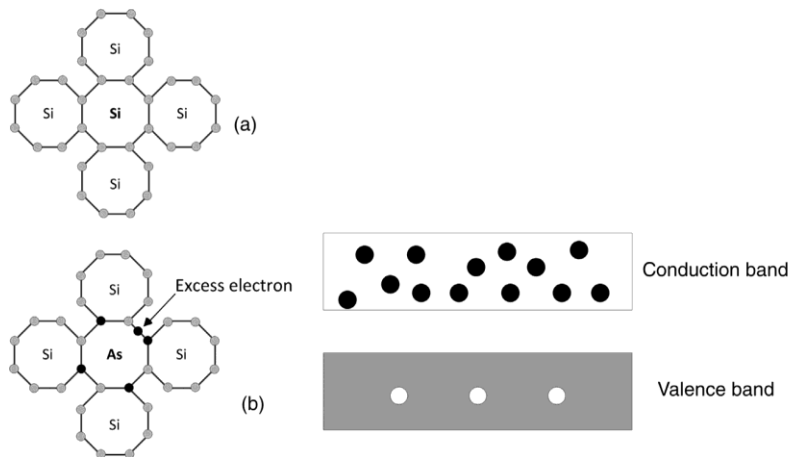


Figure 15.4 (a) Undoped Si. (b) An illustration of an *n*-type extrinsically doped Si with electrons as the majority carriers.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

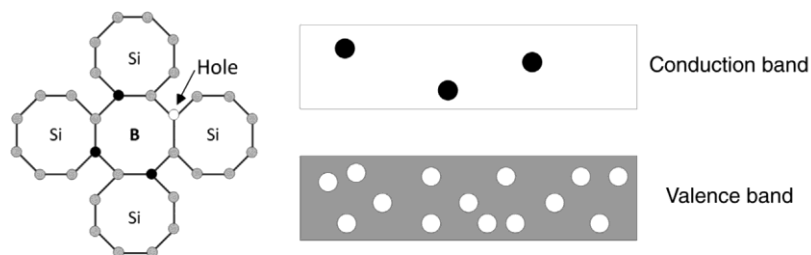


Figure 15.5 Illustration of a *p*-type extrinsically doped semiconductor with holes as the majority carriers.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

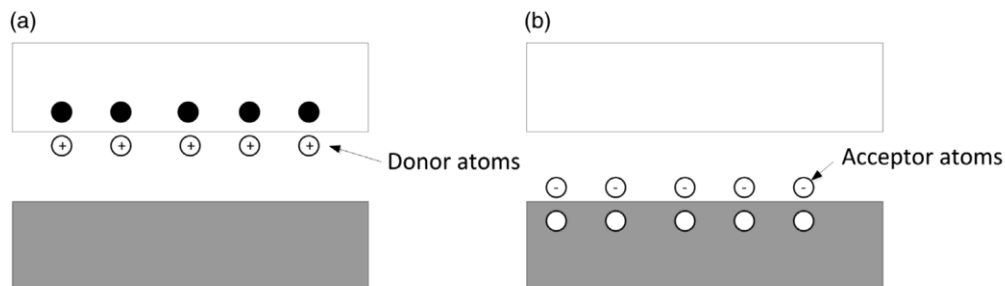


Figure 15.6 Illustration of energy levels and ionization for (a) *n*-type and (b) *p*-type dopants.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

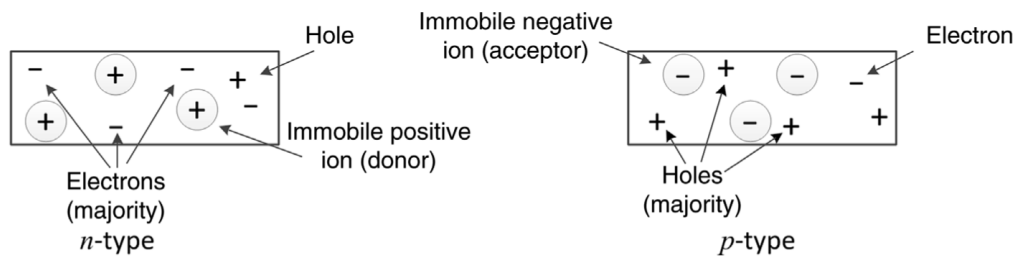


Figure 15.7 Carriers and immobile ions in extrinsic semiconductors.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

n : # of free electrons (cm^{-3})
 p : # of holes (cm^{-3})
 n_i : # of free electrons (cm^{-3}) in the
 intrinsic(undoped) SC
 N_D : # of donor atoms (cm^{-3})
 N_A : # of acceptor atoms (cm^{-3})

$n \sim N_D$ for n-type SC
 $p \sim N_A$ for p-type SC

$$np = n_i^2$$

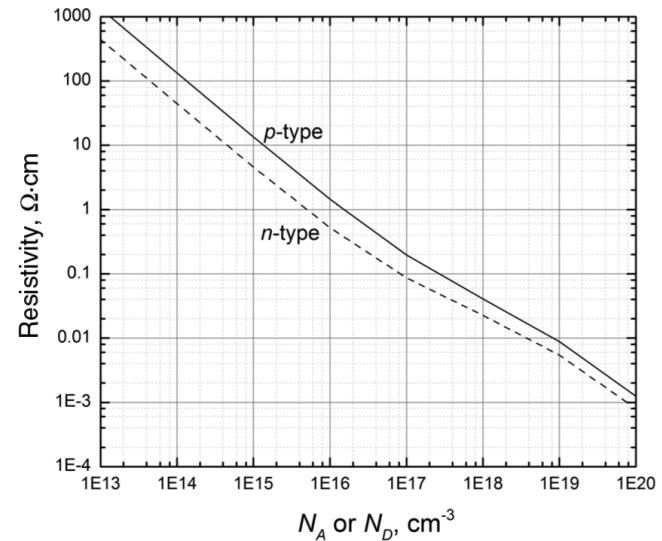


Figure 15.8 Resistivity of silicon at room temperature as function of dopant concentration. For *n*-type, the dopant is phosphorous; for *p*-type, it is boron.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

Energy scales

$$E_{\text{vacuum}}[\text{eV}] = -4.44 - qE^0$$


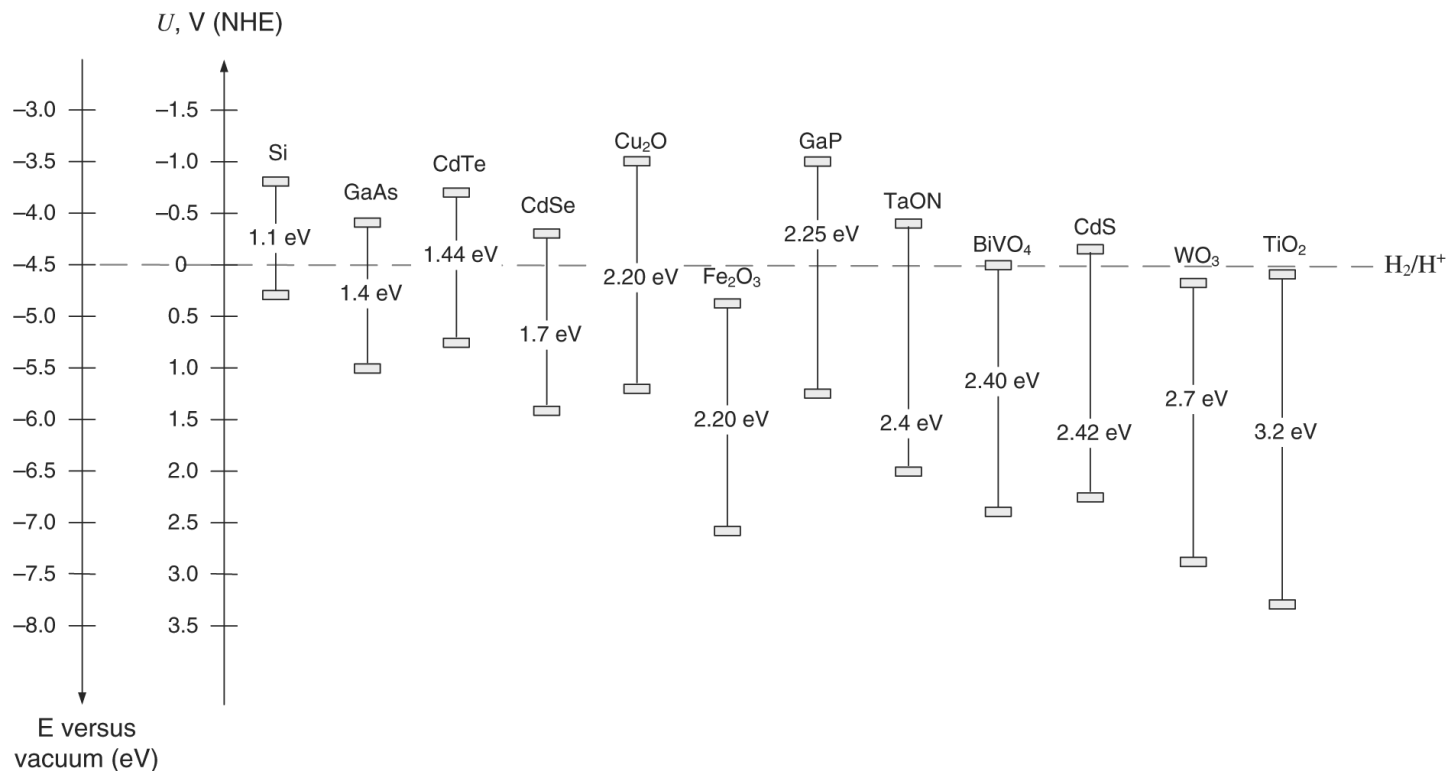



Figure 15.9 Band gap energies at 300 K as well as location of the band edges for various semiconductors. Both vacuum and hydrogen scales are shown. Solids with band gaps larger than about 3 eV are effectively insulators.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

Potential vs. energy (vs. vacuum)

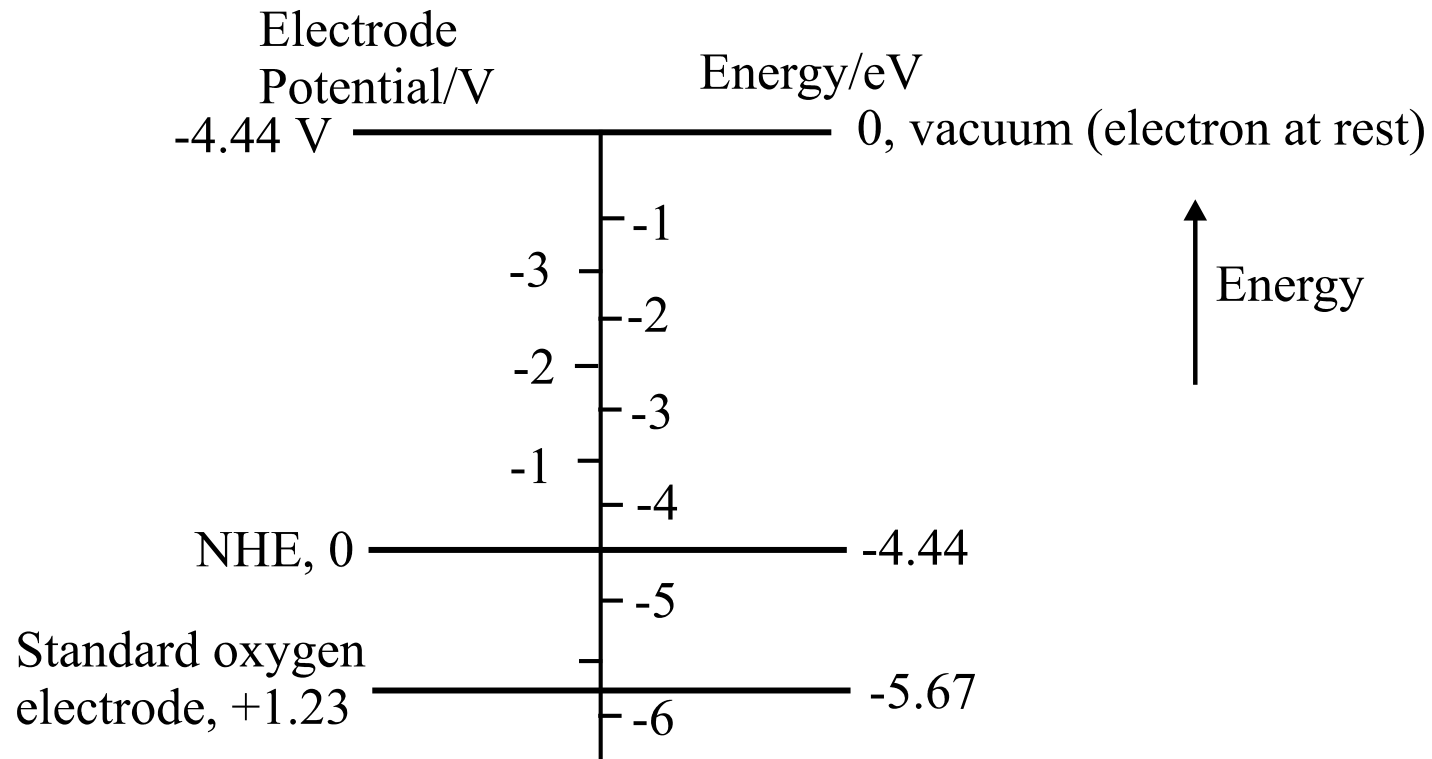

Example: Potential vs. energy (vs. vacuum)

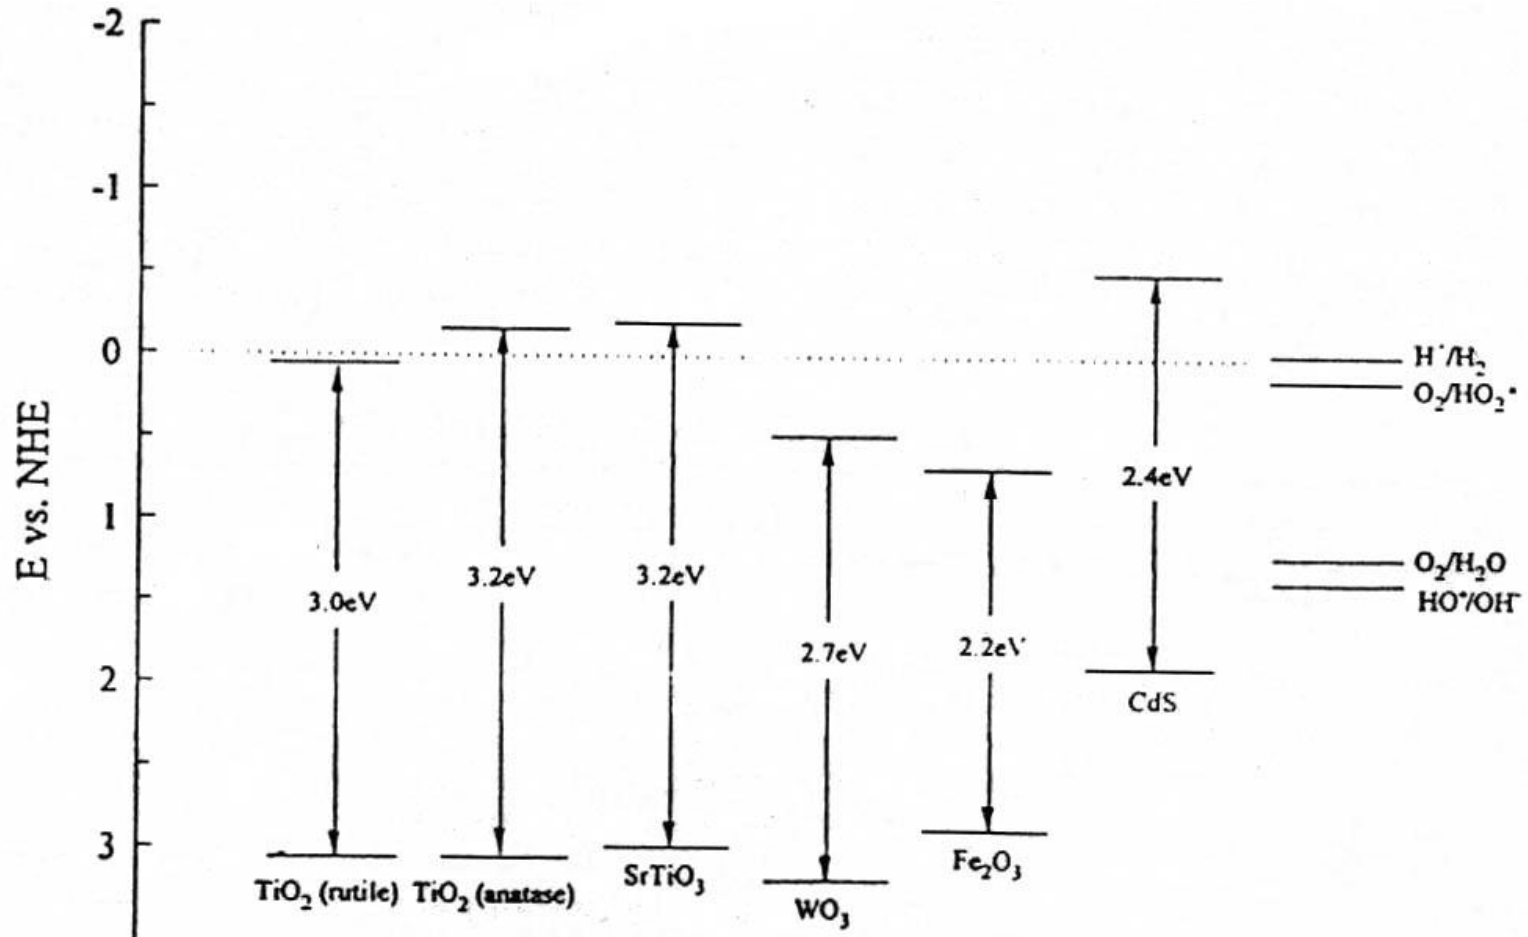

유기물이나 고분자의 HOMO, LUMO도 동일하게 표시 가능

Semiconductor-electrolyte interface




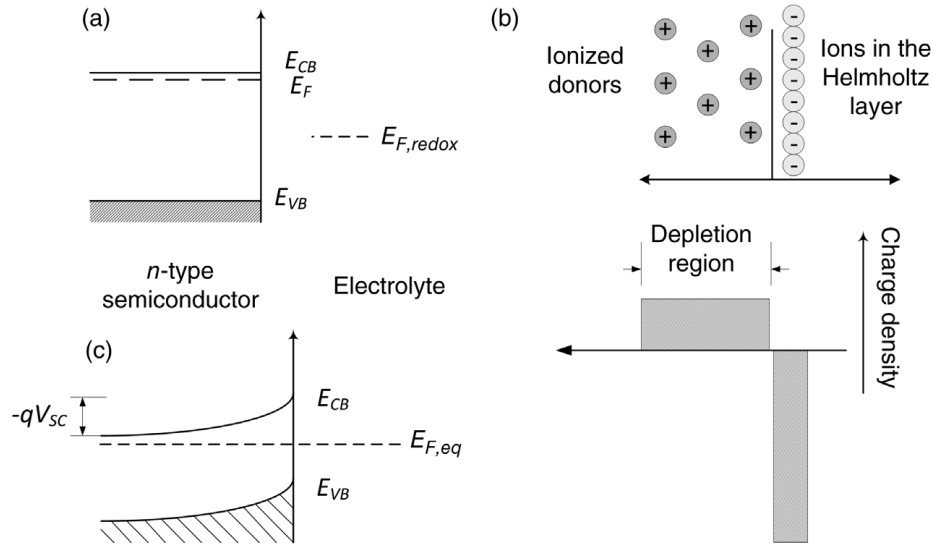


Figure 15.10 (a) Initial electron energy levels of semiconductor and redox couple, where the energy of the CB electron is higher than that of the redox couple. (b) Illustration of the physical distribution of charge after transfer of charge from n -type semiconductor (leaving a net positive charge on the left) to the electrolyte (on the right). (c) Band bending (different electron energy) at the interface after energy levels have equilibrated by the transfer of electrons between phases.

n-type

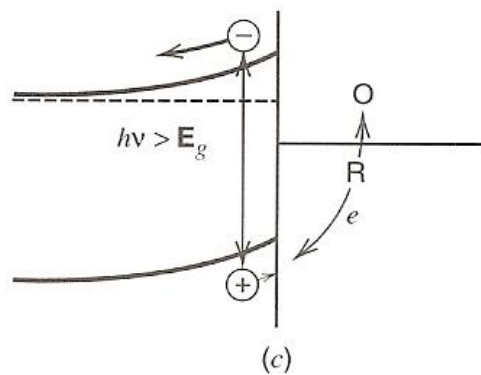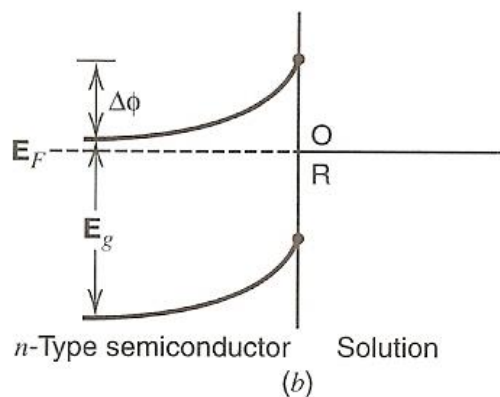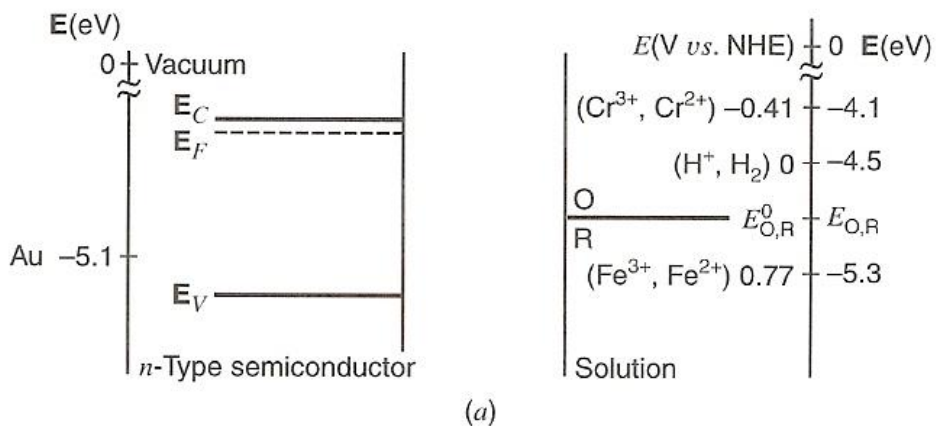

p-type

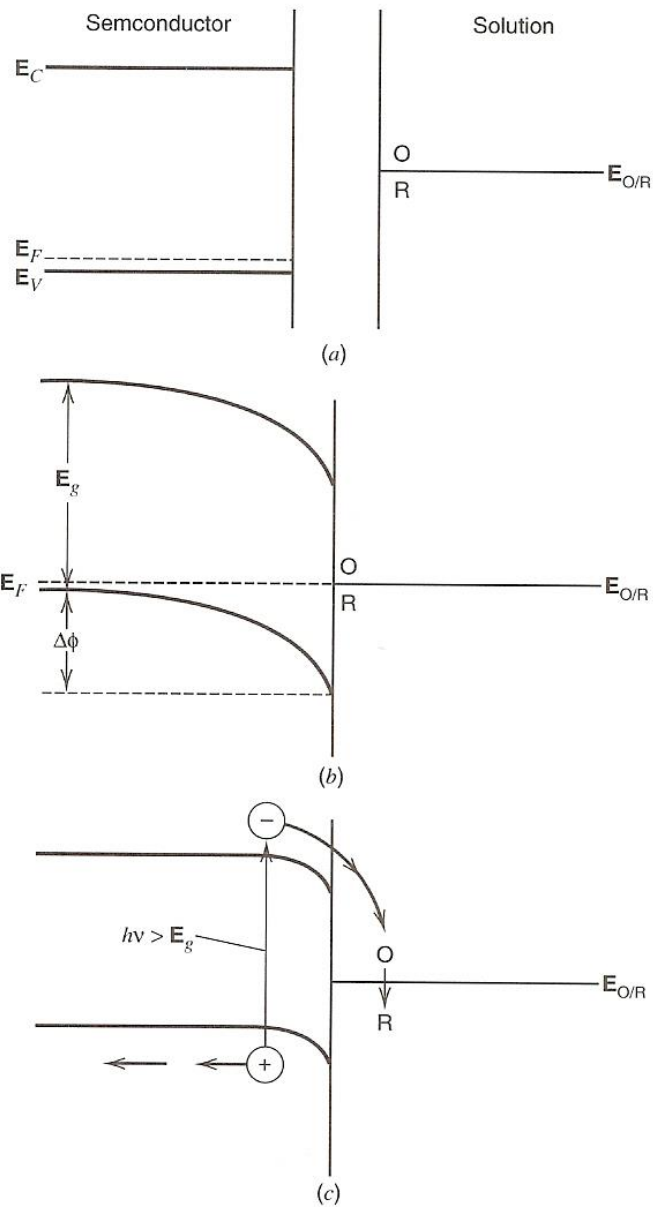


Illustration 15.3

Light absorption

$$E \text{ (eV)} = 1,240 / \lambda(\text{nm})$$

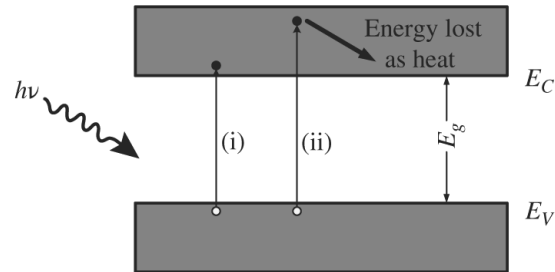


Figure 15.15 Optical absorption to excite electrons to the conduction band (i) where the photon energy is equal to the energy of the band gap, and (ii) where the photon energy is greater than the band gap energy.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
© 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

TABLE 6.2.1. Energy Gaps (E_g) of Selected Materials

Substance	E_g (eV)	Substance	E_g (eV)
Ge	0.67	Fe ₂ O ₃	~ 2.3
CuInSe ₂	0.9	CdS	2.42
Si	1.12	ZnSe	2.58
WSe ₂	~ 1.1	WO ₃	2.8
MoSe ₂	~ 1.1	TiO ₂ (rutile)	3.0
InP	1.3	TiO ₂ (anatase)	3.2
GaAs	1.4	ZnO (zincite)	3.2
CdTe	1.50	SrTiO ₃	3.2
CdSe	1.74	SnO ₂	3.5
GaP	2.2	ZnS (zinc blende)	3.54
		C (diamond)	5.4

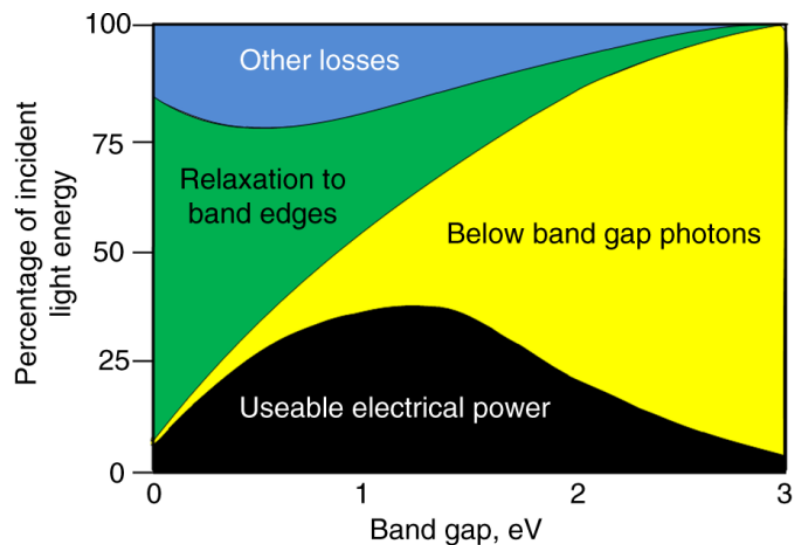


Figure 15.18 Useable electric power generated from light energy.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

Photoelectrochemical effects

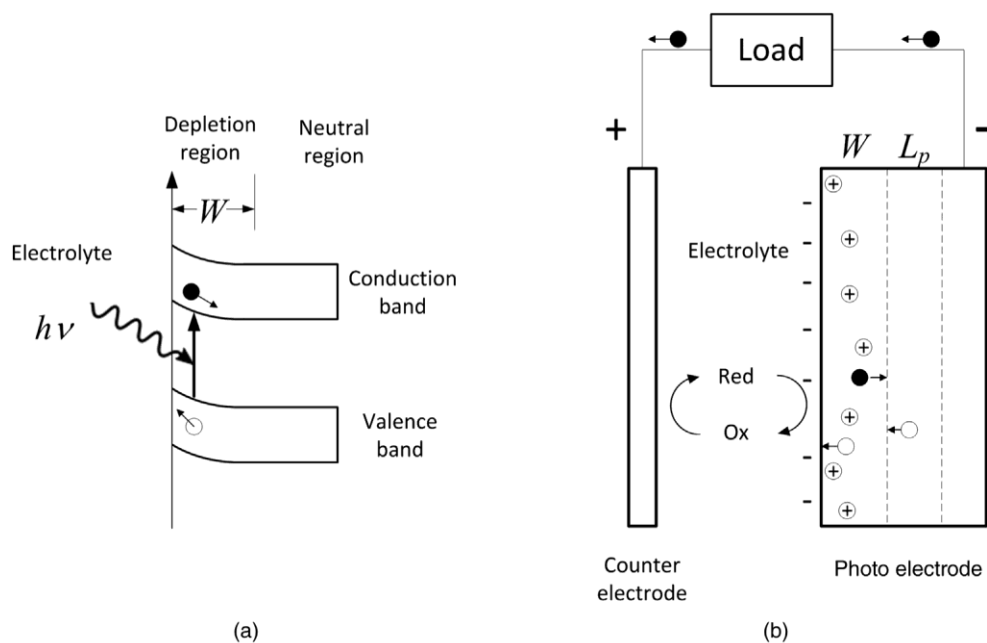



Figure 15.19 Generation and separation of electron–hole pairs through light absorption in the depletion region of an *n*-type semiconductor. (a) Band structure. (b) Physical situation.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering


Photoelectrochemistry at semiconductors

Radiation energy $\Leftrightarrow$ electrical or chemical energy

- photoelectrochemical system: absorption of light by the system (e.g., sun light) $\rightarrow$ chemical reactions & flow of current
- semiconductor:
absorb photons $\rightarrow$ electron-hole pairs $\Rightarrow$ oxidation/reduction reactions $\rightarrow$ products
(photocurrent)

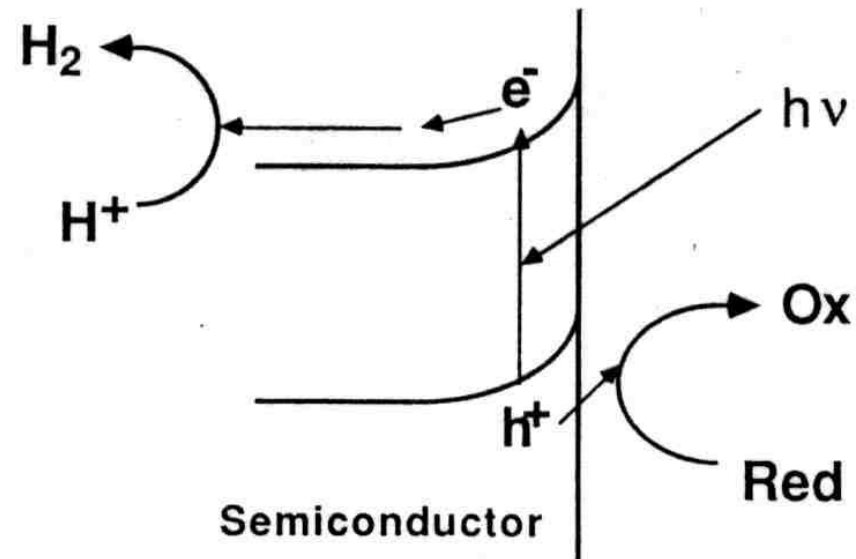


- Hydrogen fuel production (H^+ or H_2O reduction): i) kinetically difficult $\rightarrow$ catalyst, ii) recombining electrons and holes and lowering the efficiency of the photoreaction unless rapid chemical reaction



Red: sacrificial (electron) donor

e.g., Photoproduction of H_2 on p-GaAs with methyl viologen & colloidal Pt
(*J. Am. Chem. Soc.*, 102, 1488 (1980))


p - GaAs / Electrolyte / Catalyst(suspended)

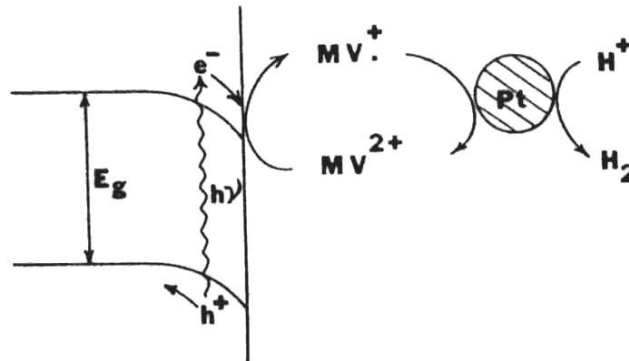


$$h\nu \geq E_g \text{ (band gap)}$$

Very slow H_2 photoreaction on GaAs (high hydrogen overpotential) $\rightarrow$ fast reaction of $\text{MV}^{2+/1+} + \text{Pt}$ (fast hydrogen evolution) $\rightarrow$ viologen + polymer/self assembly etc

e.g., CdS particles in Nafion

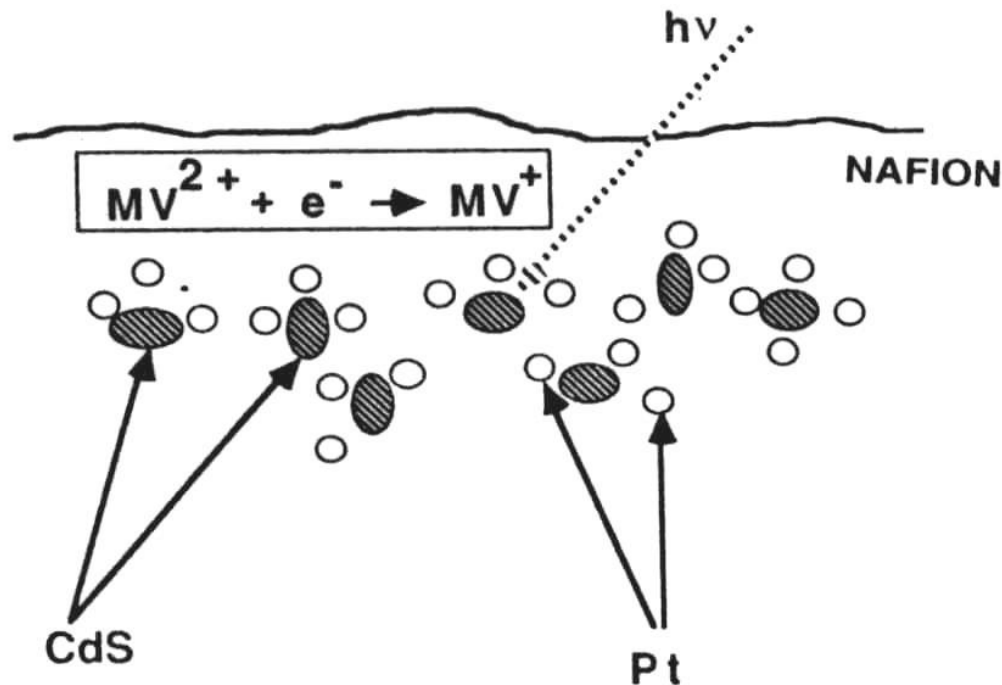


- General photoelectrochemical system for conversion of solar energy(sunlight) to useful chemical products

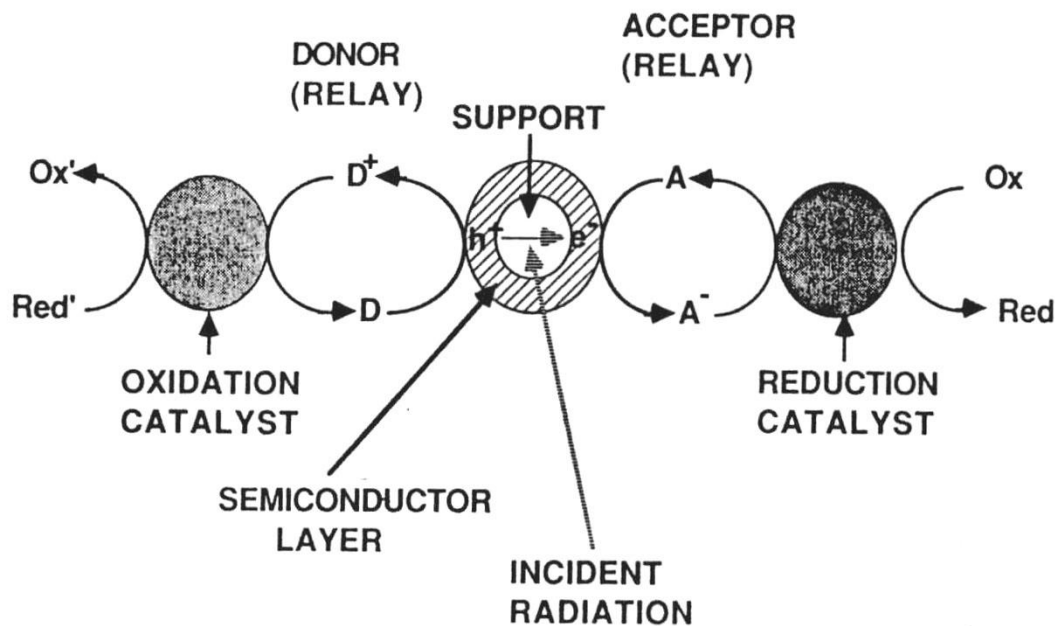

e.g., $\text{H}_2\text{O} \rightarrow 2\text{H}_2 + \text{O}_2$ or $\text{H}_2, \text{Cl}_2, \text{OH}^-$ from NaCl solution

Photoeffects at semiconductor electrodes

- 1: dark
- 2: irradiation
- 3: Pt electrode

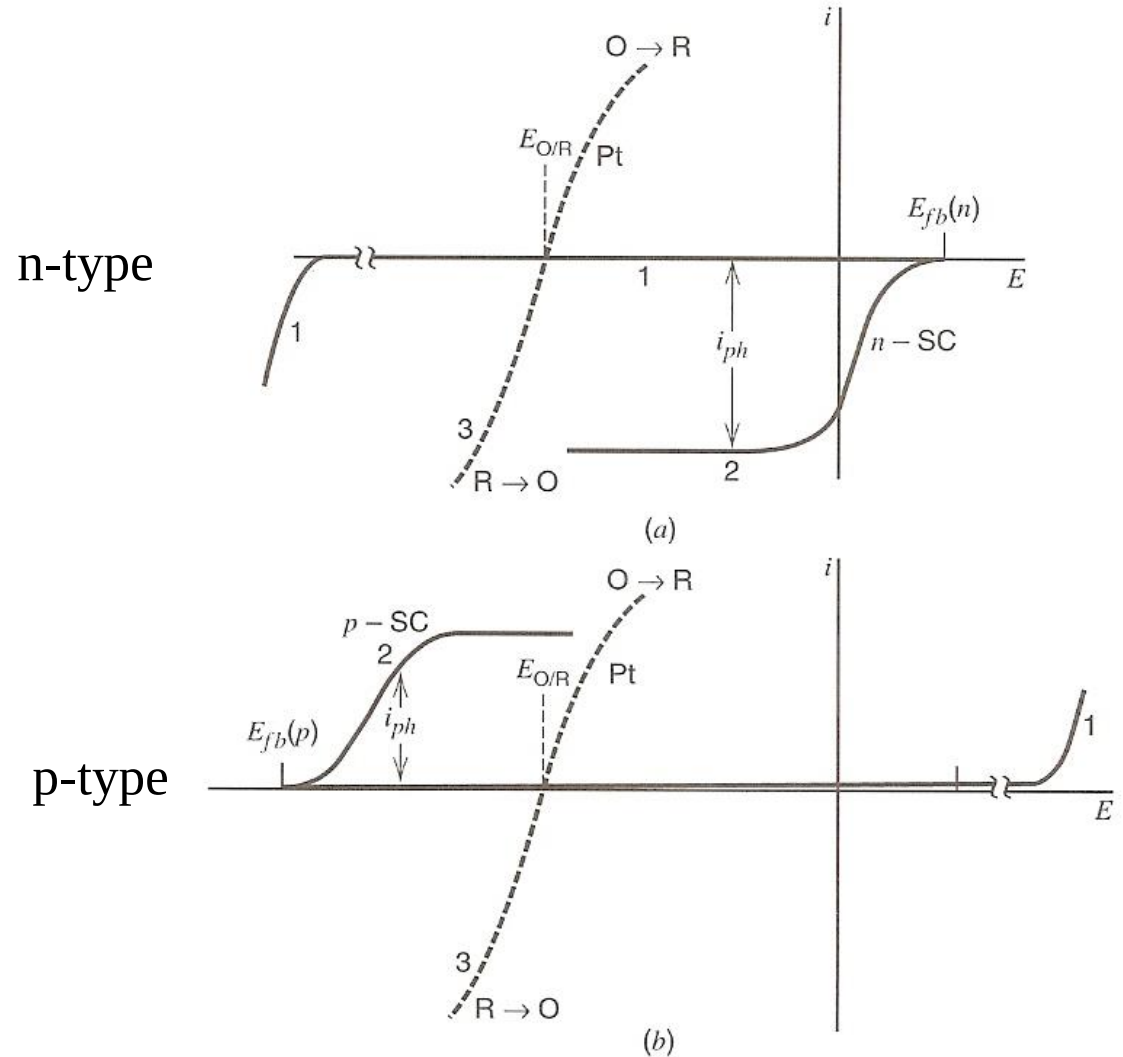

Photoelectrochemical cells

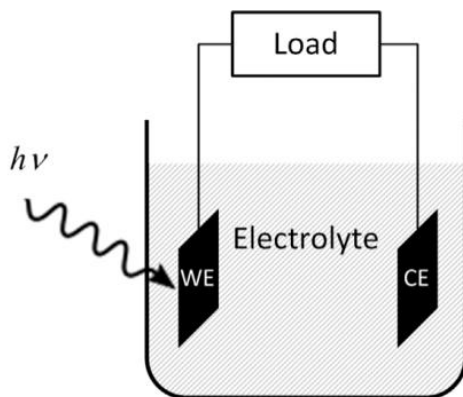


Figure 15.21 Schematic diagram of a photoelectrochemical cell.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
© 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

Maximum power


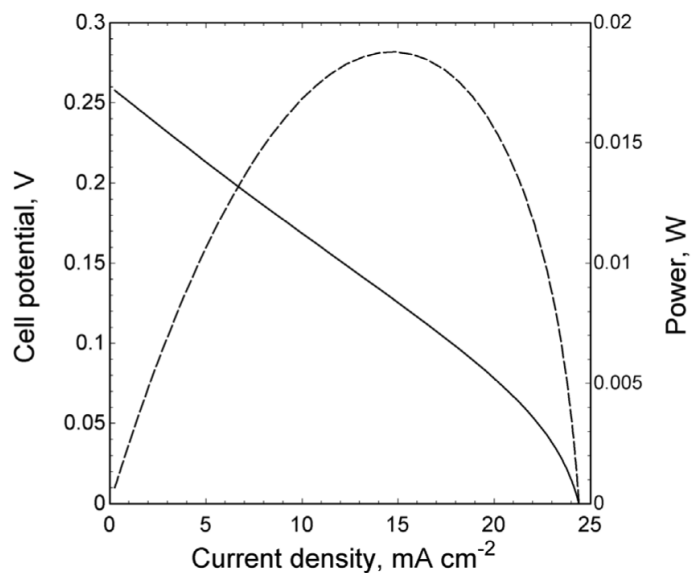


Figure 15.22 i - V curve, and on right ordinate, power versus cell potential for the cell from Illustration 15.7.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
© 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

Cell efficiency

Power curve (I-V curve)

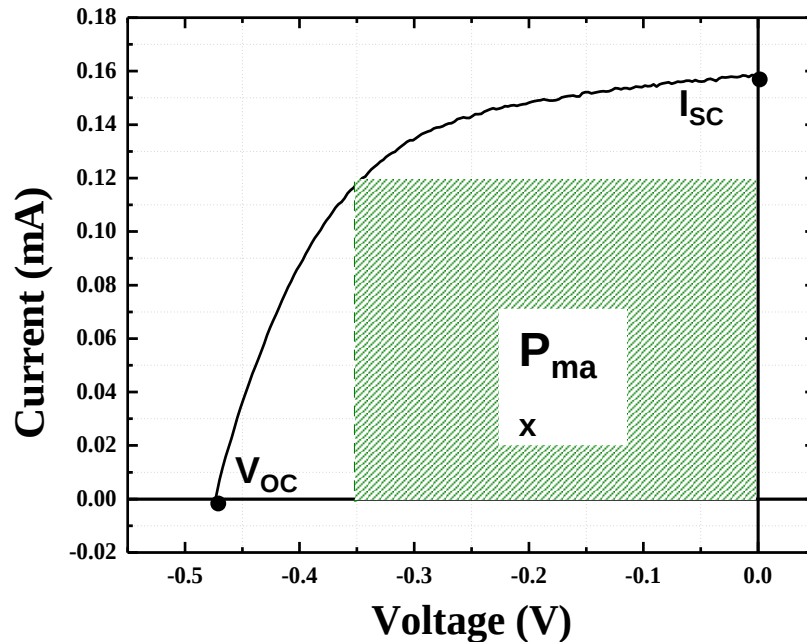

I_{SC} : Short-circuit current

→ Current value when $V=0$

V_{OC} : Open-circuit voltage

→ Voltage value when $I=0$

P : Power output of the cell

$$P=IV$$

F.F : Fill factor

$$F.F = \frac{P_{max}}{I_{SC}V_{OC}} = \frac{I_m V_m}{I_{SC}V_{OC}}$$

The overall efficiency

$$\eta = \frac{P_{max}}{P_r} = \frac{F.F I_{SC}V_{OC}}{P_r}$$

(P_r : Radiant power input)

Types of PEC cells

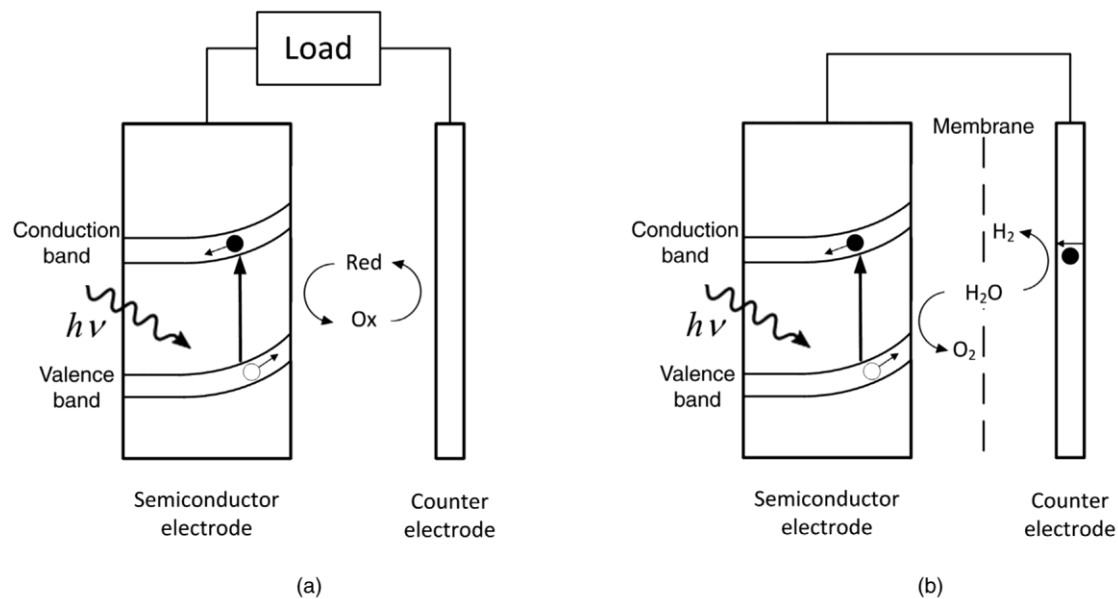


Figure 15.23 Energy diagrams for (a) a regenerative and (b) a photoelectrolytic cell. *Source:* Adapted from Grätzel 2001.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

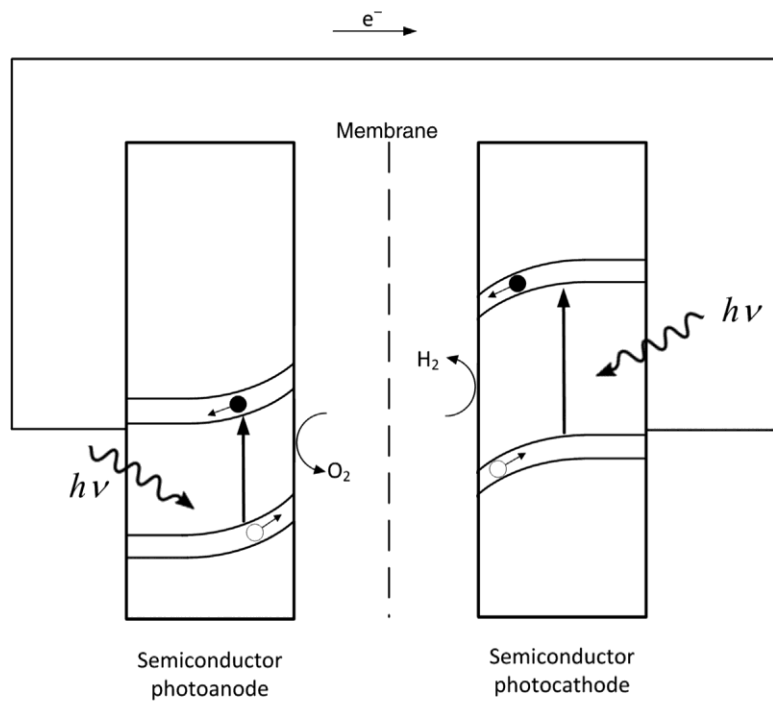


Figure 15.24 Photoelectrolytic cell with two photoelectrodes.

Electrochemical Engineering, First Edition. Thomas F. Fuller and John N. Harb.
 © 2018 Thomas F. Fuller and John N. Harb. Published 2018 by John Wiley & Sons, Inc.
 Companion Website: www.wiley.com/go/fuller/electrochemicalengineering

- Photoelectrochemical photovoltaic cells

Representative Liquid Junction Photovoltaic Cells

Semiconductor	E_g (eV)	Redox System	Efficiency (%)	Ref. ^a
n-GaAs (xyl)	1.4	Se_2^{2-} , Se^{2-}	12 (solar)	1, 2
n-GaAs (poly)	1.4	Se_2^{2-} , Se_2^{2-}	7.8 (solar)	1, 3
n-CdTe (xyl)	1.4	Te_2^{2-} , Te_2^{2-}	10 (632.8 nm)	4
n-Si (xyl)	1.1	$\text{Fc}^{+/0}(\text{MeOH})$	10 (solar)	5
p-WS ₂ (xyl)	1.3	$\text{Fc}^{+1/0}(\text{MeCN})$	7 (652.8 nm)	6
p-InP (xyl)	1.4	$\text{V}^{3+/2+}$	9.4 (solar)	7

TABLE 6.1.1. Representative Half-Reactions of Interest in Photoelectrochemistry

Reductions			Oxidations		
Ox	Red	Application	Red'	Ox'	Application
H^+	H_2	Fuel generation	Cl^-	Cl_2	Disinfection
CO_2	CH_4	Fuel generation	Br^-	Br_2	Energy storage
Cu^{2+}	Cu	Metal removal	Organic	CO_2	Wastewater treatment
Ag^+	Ag	Metal recovery	CN^-	CNO^-	Wastewater treatment
Pt(IV)	Pt	Catalyst preparation	H_2O	O_2	Inexpensive reductant
O_2	H_2O_2	Synthesis	CH_3CO_2^-	$\text{CO}_2, \text{CH}_3\cdot$	Synthesis