

2

Introduction to C Programming



*What's in a name? That which we call a rose
By any other name would smell as sweet.*

—William Shakespeare
Romeo and Juliet

*When faced with a decision, I always ask,
“What would be the most fun?”*

—Peggy Walker



“Take some more tea,” the March Hare said to Alice, very earnestly. “I’ve had nothing yet,” Alice replied in an offended tone: “so I can’t take more.” “You mean you can’t take less,” said the Hatter: “it’s very easy to take more than nothing.”

—Lewis Carroll

High thoughts must have high language.

—Aristophanes



OBJECTIVES

In this chapter you will learn:

- To write simple computer programs in C.
- To use simple input and output statements.
- The fundamental data types.
- Computer memory concepts.
- To use arithmetic operators.
- The precedence of arithmetic operators.
- To write simple decision-making statements.



Outline

- 2.1 Introduction**
- 2.2 A Simple C Program: Printing a Line of Text**
- 2.3 Another Simple C Program: Adding Two Integers**
- 2.4 Memory Concepts**
- 2.5 Arithmetic in C**
- 2.6 Decision Making: Equality and Relational Operators**



2.1 Introduction

- **C programming language**
 - Structured and disciplined approach to program design
- **Structured programming**
 - Introduced in chapters 3 and 4
 - Used throughout the remainder of the book



Outline

```

1  /* Fig. 2.1: fig02_01.c
2     A first program in C */
3  #include <stdio.h>
4
5  /* function main begins program execution */
6  int main( void )
7  {
8     printf( "Welcome to C!\n" );
9
10    return 0; /* indicate that program ended successfully */
11
12 } /* end function main */

```

Welcome to C!

/* and */ indicate comments – ignored by compiler

#include directive tells C to load a particular file

Left brace declares beginning of **main** function

Statement tells C to perform an action

return statement ends the function

Right brace declares end of **main** function

fig02_01.c



2.2 A Simple C Program: Printing a Line of Text

Comments

- Text surrounded by `/*` and `*/` is ignored by computer
- Used to describe program
- `#include <stdio.h>`
 - Preprocessor directive
 - Tells computer to load contents of a certain file
 - `<stdio.h>` allows standard input/output operations



Common Programming Error 2.1

Forgetting to terminate a comment with `*/`.



Common Programming Error 2.2

**Starting a comment with the characters `*/`
or ending a comment with the characters `/*`.**



2.2 A Simple C Program: Printing a Line of Text

- `int main()`
 - C++ programs contain one or more functions, exactly one of which must be `main`
 - Parenthesis used to indicate a function
 - `int` means that `main` "returns" an integer value
 - Braces (`{` and `}`) indicate a block
 - The bodies of all functions must be contained in braces



Good Programming Practice 2.1

Every function should be preceded by a comment describing the purpose of the function.



2.2 A Simple C Program: Printing a Line of Text

- `printf("Wel come to C! \n");`
 - **Instructs computer to perform an action**
 - Specifically, prints the string of characters within quotes (" ")
 - **Entire line called a statement**
 - All statements must end with a semicolon (;)
 - **Escape character (\)**
 - Indicates that printf should do something out of the ordinary
 - \n is the newline character



Escape sequence	Description
<code>\n</code>	Newline. Position the cursor at the beginning of the next line.
<code>\t</code>	Horizontal tab. Move the cursor to the next tab stop.
<code>\a</code>	Alert. Sound the system bell.
<code>\\</code>	Backslash. Insert a backslash character in a string.
<code>\"</code>	Double quote. Insert a double-quote character in a string.

Fig. 2.2 | Some common escape sequences.



Common Programming Error 2.3

**Typing the name of the output function
`printf` as `print` in a program.**



2.2 A Simple C Program: Printing a Line of Text

- **return 0;**
 - A way to exit a function
 - return 0, in this case, means that the program terminated normally
- **Right brace }**
 - Indicates end of main has been reached
- **Linker**
 - When a function is called, linker locates it in the library
 - Inserts it into object program
 - If function name is misspelled, the linker will produce an error because it will not be able to find function in the library



Good Programming Practice 2.2

Add a comment to the line containing the right brace, `}`, that closes every function, including `main`.



Good Programming Practice 2.3

The last character printed by a function that displays output should be a newline (`\n`). This ensures that the function will leave the screen cursor positioned at the beginning of a new line. Conventions of this nature encourage software reusability—a key goal in software development environments.



Good Programming Practice 2.4

Indent the entire body of each function one level of indentation (we recommend three spaces) within the braces that define the body of the function. This indentation emphasizes the functional structure of programs and helps make programs easier to read.



Good Programming Practice 2.5

Set a convention for the size of indent you prefer and then uniformly apply that convention. The tab key may be used to create indents, but tab stops may vary. We recommend using three spaces per level of indent.



Outline

fi g02_03. c

```
1 /* Fig. 2.3: fi g02_03. c
2   Printing on one line with two printf statements */
3 #include <stdio. h>
4
5 /* function main begins program execution */
6 int main( void )
7 {
8   printf( "Wel come " );
9   printf( "to C!\n" );
10
11   return 0; /* indicate that program ended successfully */
12
13 } /* end function main */
```

printf statement starts printing from where the last statement ended, so the text is printed on one line.

```
Wel come to C!
```



Outline

```
1 /* Fig. 2.4: fig02_04.c
2    Printing multiple lines with a single printf */
3 #include <stdio.h>
4
5 /* function main begins program execution */
6 int main( void )
7 {
8     printf( "Welcome\n\tto\n\tC!\n" );
9
10    return 0; /* indicate that program ended successfully */
11
12 } /* end function main */
```

Newline characters move the cursor to the next line




fig02_04.c

```
Welcome
to
C!
```



Outline

fi g02_05. c

```

1  /* Fig. 2.5: fi g02_05. c
2     Addi ti on program */
3  #i ncl ude <stdi o. h>
4
5  /* functi on mai n begi ns program executi on */
6  i nt mai n( voi d )
7  {
8     i nt i nteger1; /* first number to be input by user */
9     i nt i nteger2; /* second number to be input by user */
10    i nt sum;      /* variable in which sum will be stored */
11
12    printf( "Enter first integer\n" ); /* prompt */
13    scanf( "%d", &i nteger1 ); /* read an integer */
14
15    printf( "Enter second integer\n" ); /* prompt */
16    scanf( "%d", &i nteger2 ); /* read an integer */
17
18    sum = i nteger1 + i nteger2; /* assign total to sum */
19
20    printf( "Sum is %d\n", sum ); /* print sum */
21
22    return 0; /* indicate that program ended successfully */
23
24 } /* end functi on mai n */

```

Definitions of variables

scanf obtains a value from the user and assigns it to **integer1**scanf obtains a value from the user and assigns it to **integer2**Assigns a value to **sum**

```

Enter first integer
45
Enter second integer
72
Sum is 117

```



2.3 Another Simple C Program: Adding Two Integers

- **As before**
 - Comments, `#include <stdio.h>` and `main`
- `int integer1, integer2, sum;`
 - **Definition of variables**
 - **Variables:** locations in memory where a value can be stored
 - `int` means the variables can hold integers (-1, 3, 0, 47)
 - **Variable names (identifiers)**
 - `integer1, integer2, sum`
 - **Identifiers:** consist of letters, digits (cannot begin with a digit) and underscores (`_`)
 - Case sensitive
 - **Definitions appear before executable statements**
 - If an executable statement references and undeclared variable it will produce a syntax (compiler) error



Common Programming Error 2.4

Using a capital letter where a lowercase letter should be used (for example, typing `Main` instead of `main`).



Portability Tip 2.1

**Use identifiers of 31 or fewer characters.
This helps ensure portability and can avoid
some subtle programming errors.**



Good Programming Practice 2.6

Choosing meaningful variable names helps make a program self-documenting, i.e., fewer comments are needed.



Good Programming Practice 2.7

The first letter of an identifier used as a simple variable name should be a lowercase letter. Later in the text we will assign special significance to identifiers that begin with a capital letter and to identifiers that use all capital letters.



Good Programming Practice 2.8

Multiple-word variable names can help make a program more readable. Avoid run-ning the separate words together as in total commi ssi ons. Rather, separate the words with underscores as in total _commi ssi ons, or, if you do wish to run the words together, begin each word after the first with a capital letter as in total Commi ssi ons. The latter style is preferred.



Common Programming Error 2.5

Placing variable definitions among executable statements causes syntax errors.



Good Programming Practice 2.9

Separate the definitions and executable statements in a function with one blank line to emphasize where the definitions end and the executable statements begin.



2.3 Another Simple C Program: Adding Two Integers

- `scanf("%d", &i n t e g e r 1);`
 - Obtains a value from the user
 - `scanf` uses standard input (usually keyboard)
 - This `scanf` statement has two arguments
 - `%d` - indicates data should be a decimal integer
 - `&i n t e g e r 1` - location in memory to store variable
 - `&` is confusing in beginning – for now, just remember to include it with the variable name in `scanf` statements
 - When executing the program the user responds to the `scanf` statement by typing in a number, then pressing the *enter* (return) key



Good Programming Practice 2.10

Place a space after each comma (,) to make programs more readable.



2.3 Another Simple C Program: Adding Two Integers

- **= (assignment operator)**
 - Assigns a value to a variable
 - Is a binary operator (has two operands)
 - sum = variable1 + variable2;
 - sum gets variable1 + variable2;
 - Variable receiving value on left
- **printf("Sum is %d\n", sum);**
 - Similar to scanf
 - %d means decimal integer will be printed
 - sum specifies what integer will be printed
 - Calculations can be performed inside printf statements
 - printf("Sum is %d\n", integer1 + integer2);



Good Programming Practice 2.11

Place spaces on either side of a binary operator. This makes the operator stand out and makes the program more readable.



Common Programming Error 2.6

A calculation in an assignment statement must be on the right side of the = operator. It is a syntax error to place a calculation on the left side of an assignment operator.



Common Programming Error 2.7

Forgetting one or both of the double quotes surrounding the format control string in a `printf` or `scanf`.



Common Programming Error 2.8

Forgetting the % in a conversion specification in the format control string of a printf or scanf.



Common Programming Error 2.9

Placing an escape sequence such as `\n` outside the format control string of a `printf` or `scanf`.



Common Programming Error 2.10

Forgetting to include the expressions whose values are to be printed in a `printf` containing conversion specifiers.



Common Programming Error 2.11

Not providing a conversion specifier when one is needed in a `printf` format control string to print the value of an expression.



Common Programming Error 2.12

Placing inside the format control string the comma that is supposed to separate the format control string from the expressions to be printed.



Common Programming Error 2.13

Forgetting to precede a variable in a scanf statement with an ampersand when that variable should, in fact, be preceded by an ampersand.



Common Programming Error 2.14

Preceding a variable included in a `printf` statement with an ampersand when, in fact, that variable should not be preceded by an ampersand.



2.4 Memory Concepts

■ Variables

- Variable names correspond to locations in the computer's memory
- Every variable has a name, a type, a size and a value
- Whenever a new value is placed into a variable (through `scanf`, for example), it replaces (and destroys) the previous value
- Reading variables from memory does not change them



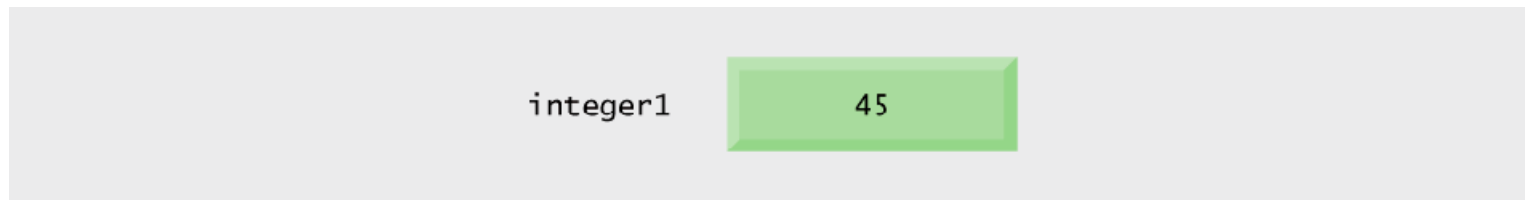


Fig. 2.6 | Memory location showing the name and value of a variable.



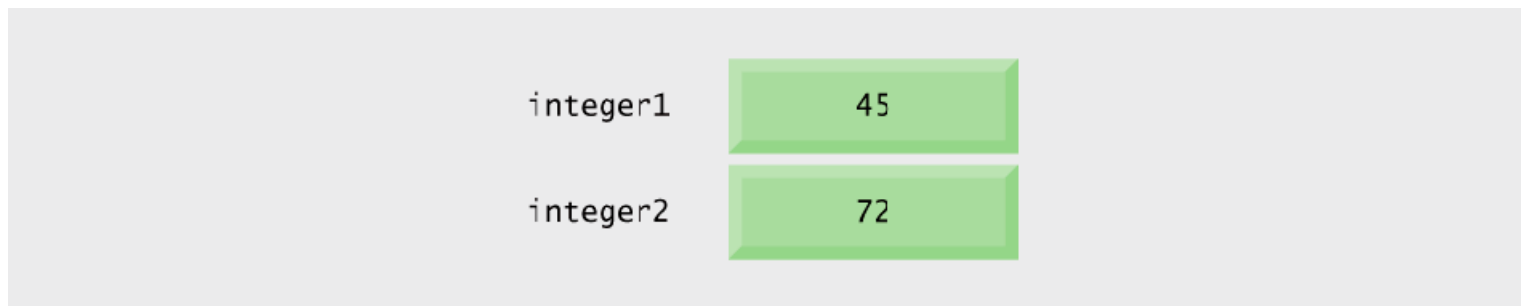


Fig. 2.7 | Memory locations after both variables are input.



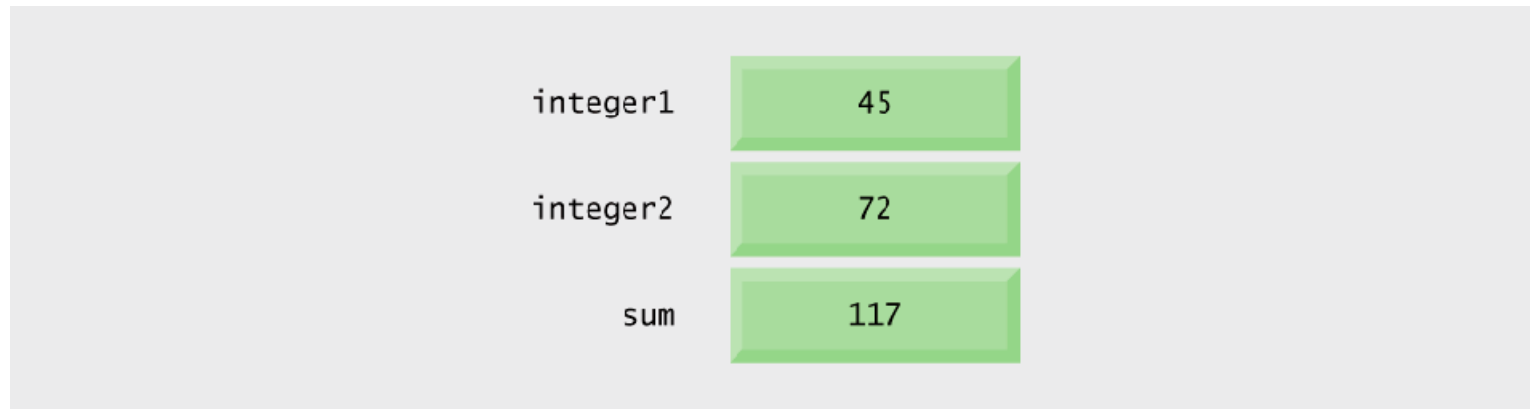


Fig. 2.8 | Memory locations after a calculation.



2.5 Arithmetic

- **Arithmetic calculations**
 - Use * for multiplication and / for division
 - Integer division truncates remainder
 - $7 / 5$ evaluates to 1
 - Modulus operator(%) returns the remainder
 - $7 \% 5$ evaluates to 2
- **Operator precedence**
 - Some arithmetic operators act before others (i.e., multiplication before addition)
 - Use parenthesis when needed
 - Example: Find the average of three variables a, b and c
 - Do not use: $a + b + c / 3$
 - Use: $(a + b + c) / 3$



C operation	Arithmetic operator	Algebraic expression	C expression
Addition	+	$f + 7$	<code>f + 7</code>
Subtraction	-	$p - c$	<code>p - c</code>
Multiplication	*	bm	<code>b * m</code>
Division	/	x/y or $\frac{x}{y}$ or $x \div y$	<code>x / y</code>
Remainder	%	$r \text{ mod } s$	<code>r % s</code>

Fig. 2.9 | Arithmetic operators.



Common Programming Error 2.15

An attempt to divide by zero is normally undefined on computer systems and generally results in a fatal error, i.e., an error that causes the program to terminate immediately without having successfully performed its job. Nonfatal errors allow programs to run to completion, often producing incorrect results.



Operator(s)	Operation(s)	Order of evaluation (precedence)
()	Parentheses	Evaluated first. If the parentheses are nested, the expression in the innermost pair is evaluated first. If there are several pairs of parentheses “on the same level” (i.e., not nested), they are evaluated left to right.
* / %	Multiplication Division Remainder	Evaluated second. If there are several, they are evaluated left to right.
+ -	Addition Subtraction	Evaluated last. If there are several, they are evaluated left to right.

Fig. 2.10 | Precedence of arithmetic operators.



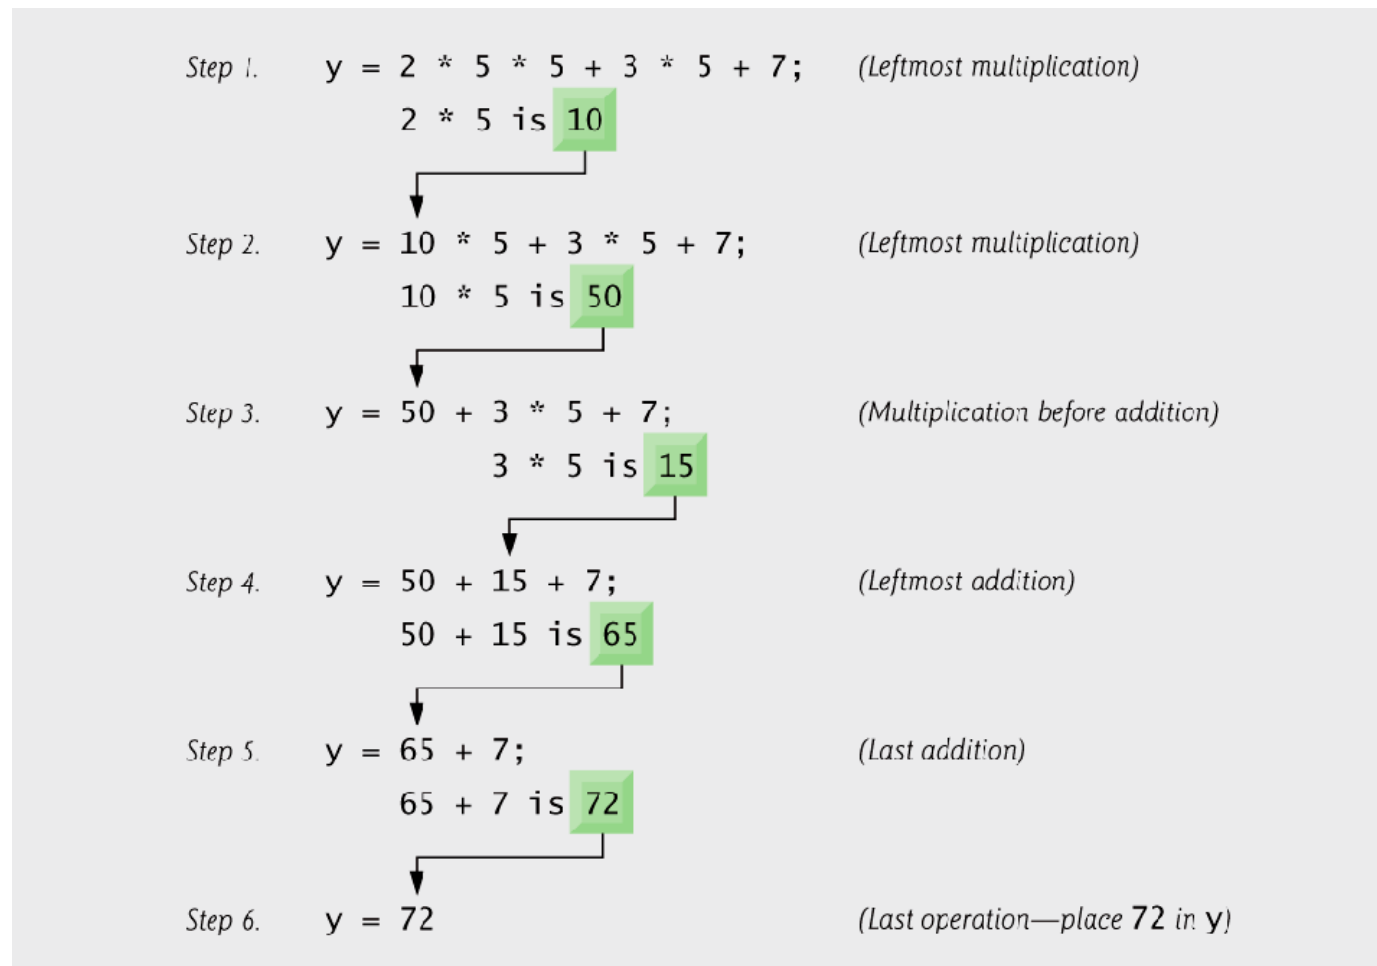


Fig. 2.11 | Order in which a second-degree polynomial is evaluated.



Good Programming Practice 2.12

Using redundant parentheses in complex arithmetic expressions can make the expressions clearer.



2.6 Decision Making: Equality and Relational Operators

- **Executable statements**
 - Perform actions (calculations, input/output of data)
 - Perform decisions
 - May want to print "pass" or "fail" given the value of a test grade
- **if control statement**
 - Simple version in this section, more detail later
 - If a condition is true, then the body of the if statement executed
 - 0 is false, non-zero is true
 - Control always resumes after the if structure
- **Keywords**
 - Special words reserved for C
 - Cannot be used as identifiers or variable names



Standard algebraic equality operator or relational operator	C equality or relational operator	Example of C condition	Meaning of C condition
<i>Equality operators</i>			
=	==	$x == y$	x is equal to y
≠	!=	$x != y$	x is not equal to y
<i>Relational operators</i>			
>	>	$x > y$	x is greater than y
<	<	$x < y$	x is less than y
≥	>=	$x >= y$	x is greater than or equal to y
≤	<=	$x <= y$	x is less than or equal to y

Fig. 2.12 | Equality and relational operators.



Common Programming Error 2.16

A syntax error will occur if the two symbols in any of the operators `==`, `!=`, `>=` and `<=` are separated by spaces.



Common Programming Error 2.17

A syntax error will occur if the two symbols in any of the operators $!=$, $>=$ and $<=$ are reversed as in $=!$, $=>$ and $=<$, respectively.



Common Programming Error 2.18

Confusing the equality operator `==` with the assignment operator `=`.



Common Programming Error 2.19

Placing a semicolon immediately to the right of the right parenthesis after the condition in an `if` statement.



Good Programming Practice 2.13

Indent the statement(s) in the body of an `i f` statement.



Good Programming Practice 2.14

**Place a blank line before and after every
i f statement in a program for readability.**



Good Programming Practice 2.15

Although it is allowed, there should be no more than one statement per line in a program.



Common Programming Error 2.20

Placing commas (when none are needed) between conversion specifiers in the format control string of a `scanf` statement.



Outline

fi g02_13. c

(1 of 3)

```

1  /* Fig. 2.13: fi g02_13. c
2     Using if statements, relational
3     operators, and equality operators */
4  #i nclude <stdio. h>
5
6  /* function main begins program execution */
7  i nt main( void )
8  {
9     i nt num1; /* first number to be read from user */
10    i nt num2; /* second number to be read from user */
11
12    printf( "Enter two integers, and I will tell you\n" );
13    printf( "the relationships they satisfy: " );
14
15    scanf( "%d%d", &num1, &num2 ); /* read two integers */
16
17    i f ( num1 == num2 ) {
18        printf( "%d is equal to %d\n", num1, num2 );
19    } /* end if */
20
21    i f ( num1 != num2 ) {
22        printf( "%d is not equal to %d\n", num1, num2 );
23    } /* end if */
24
25    i f ( num1 < num2 ) {
26        printf( "%d is less than %d\n", num1, num2 );
27    } /* end if */
28

```

Checks if **num1** is equal to **num2**

Checks if **num1** is not equal to **num2**

Checks if **num1** is less than **num2**



Outline

```

29  if ( num1 > num2 ) {
30      printf( "%d is greater than %d\n", num1, num2 );
31  } /* end if */
32
33  if ( num1 <= num2 ) {
34      printf( "%d is less than or equal to %d\n", num1, num2 );
35  } /* end if */
36
37  if ( num1 >= num2 ) {
38      printf( "%d is greater than or equal to %d\n", num1, num2 );
39  } /* end if */
40
41  return 0; /* indicate that program ended successfully */
42
43 } /* end function main */
43 } /* end function main */

```

Checks if **num1** is greater than **num2**

Checks if **num1** is less than or equal to **num2**

Checks if **num1** is greater than equal to **num2**

fi g02_13. c

(2 of 3)

```

Enter two integers, and I will tell you
the relationships they satisfy: 3 7
3 is not equal to 7
3 is less than 7
3 is less than or equal to 7

```

(continued on next slide...)



(continued from previous slide...)

67

Outline

fi g02_13. c

(3 of 3)

Enter two integers, and I will tell you
the relationships they satisfy:

22 is not equal to 12

22 is greater than 12

22 is greater than or equal to 12

Enter two integers, and I will tell you
the relationships they satisfy:

7 is equal to 7

7 is less than or equal to 7

7 is greater than or equal to 7



Good Programming Practice 2.16

A lengthy statement may be spread over several lines. If a statement must be split across lines, choose breaking points that make sense (such as after a comma in a comma-separated list). If a statement is split across two or more lines, indent all subsequent lines.



Good Programming Practice 2.17

Refer to the operator precedence chart when writing expressions containing many operators. Confirm that the operators in the expression are applied in the proper order. If you are uncertain about the order of evaluation in a complex expression, use parentheses to group expressions or break the statement into several simpler statements. Be sure to observe that some of C's operators such as the assignment operator (=) associate from right to left rather than from left to right.



Operators	Associativity
()	left to right
* / %	left to right
+ -	left to right
< <= > >=	left to right
== !=	left to right
=	right to left

Fig. 2.14 | Precedence and associativity of the operators discussed so far.



Keywords			
auto	double	int	struct
break	else	long	switch
case	enum	register	typedef
char	extern	return	union
const	float	short	unsigned
continue	for	signed	void
default	goto	sizeof	volatile
do	if	static	while

Fig. 2.15 | C's keywords.

